
Lab 3 – Basic Command Line

Name: QIMIN ZHU ID: 6888143


Do all problems by using the command line and paste screened capture of the results

1. Switch from the GUI mode to command line mode.

2. Go to `/var` directory and list all files and directories in the home directory, including all hidden files, but excluding the Download directory.

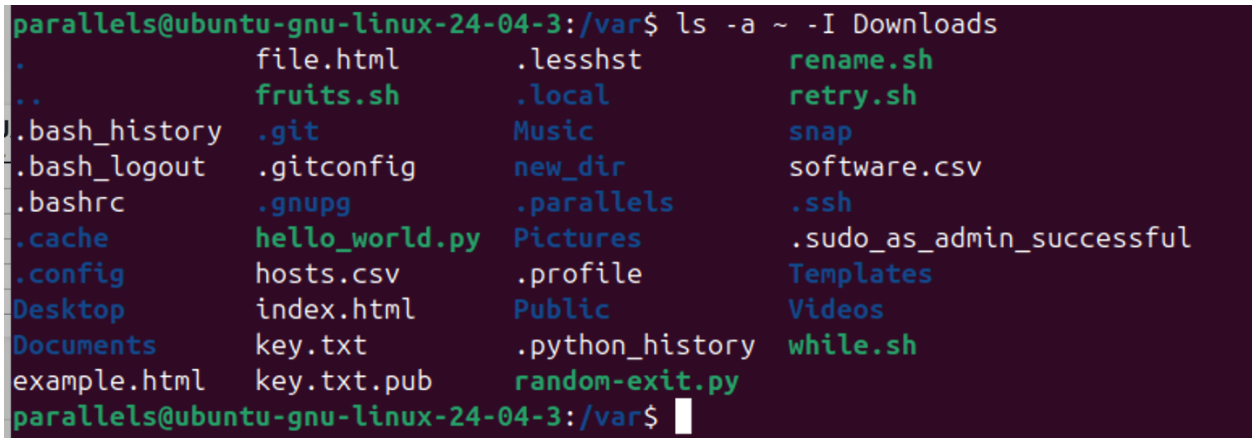


3. Schedule shutdown time at 11:00 PM and show the message “It’s time to bed!”. Then, cancel the schedule.

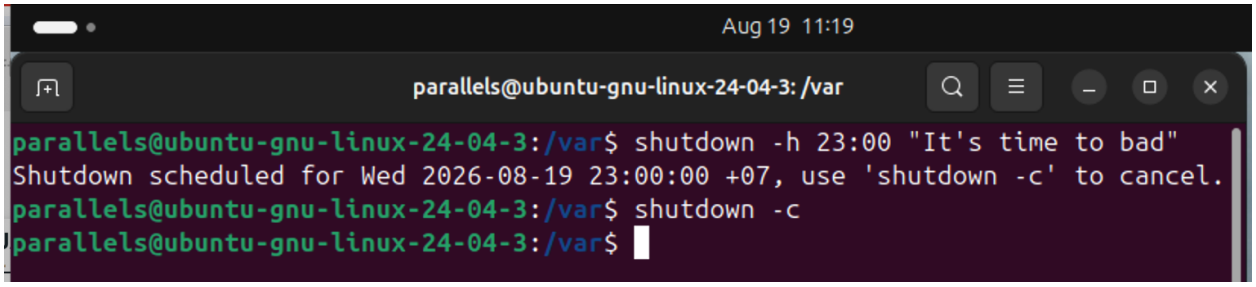

4. Find out the location of the `gcc` utility.

```
parallels@ubuntu-gnu-linux-24-04-3: /usr/bin
parallels@ubuntu-gnu-linux-24-04-3:/usr/bin$ which gcc
/usr/bin/gcc
parallels@ubuntu-gnu-linux-24-04-3:/usr/bin$
```

5. Show details of the `sudo` command in the manual.

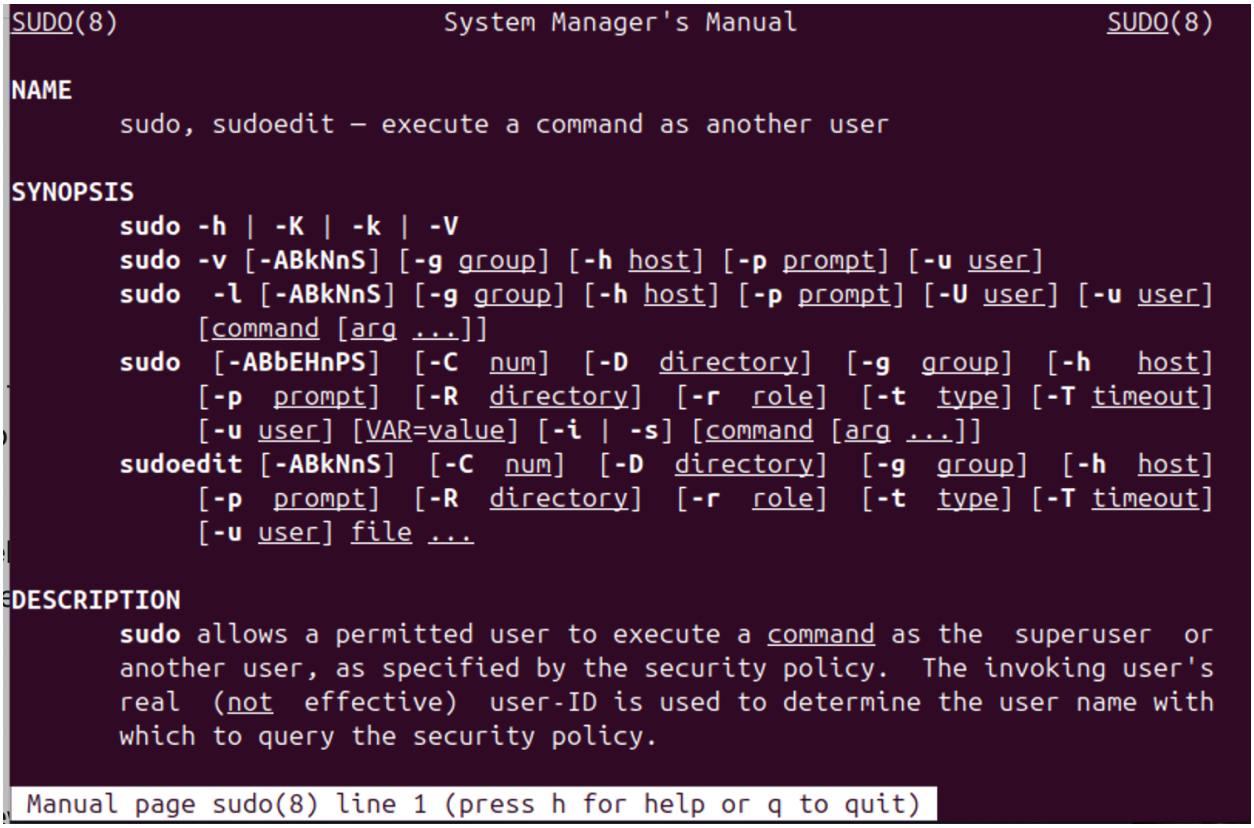

```
SUDO(8)                    System Manager's Manual                    SUDO(8)

NAME
       sudo, sudoedit — execute a command as another user

SYNOPSIS
       sudo -h | -K | -k | -V
       sudo -v [-ABkNnS] [-g group] [-h host] [-p prompt] [-u user]
       sudo  -l [-ABkNnS] [-g group] [-h host] [-p prompt] [-U user] [-u user]
            [command [arg ...]]
       sudo  [-ABbEHnPS]  [-C  num]  [-D  directory]  [-g  group]  [-h  host]
            [-p  prompt]  [-R  directory]  [-r  role]  [-t  type] [-T timeout]
            [-u user] [VAR=value] [-i | -s] [command [arg ...]]
       sudoedit [-ABkNnS]  [-C  num]  [-D  directory]  [-g  group]  [-h  host]
            [-p  prompt]  [-R  directory]  [-r  role]  [-t  type] [-T timeout]
            [-u user] file ...

DESCRIPTION
       sudo allows a permitted user to execute a command as the  superuser  or
       another user, as specified by the security policy.  The invoking user's
       real  (not  effective)  user-ID is used to determine the user name with
       which to query the security policy.

 Manual page sudo(8) line 1 (press h for help or q to quit)
```

6. Go to the home directory, then go to `/usr/bin` directory with the absolute pathname method. Then, go back to the home directory again by the shortcut method, i.e., using “-“ operator.



7. Go to `/etc` directory with the relative pathname method, and display the present working directory.

