
A

Anatomical OFC ROIs

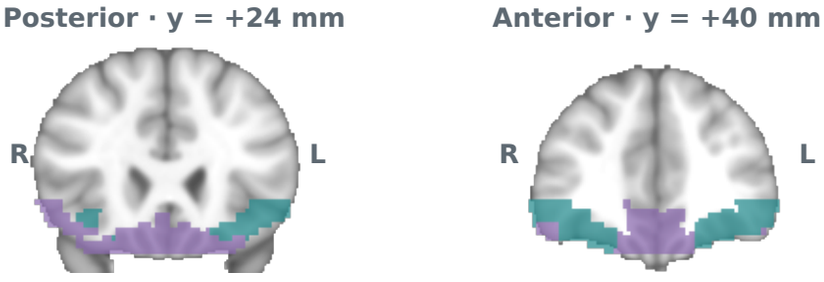

Within-probe RSA (B,D)

Premeal cue patterns → Neural RDM ρ Odor-identity RDM

same = 0; different = 1


Perception-to-cue decoding (C)

Odor-evoked patterns → (train) Linear SVM → (test) Cue-predicted odor identity

odor 1 vs odor 2


B

Representation of predicted odor identity

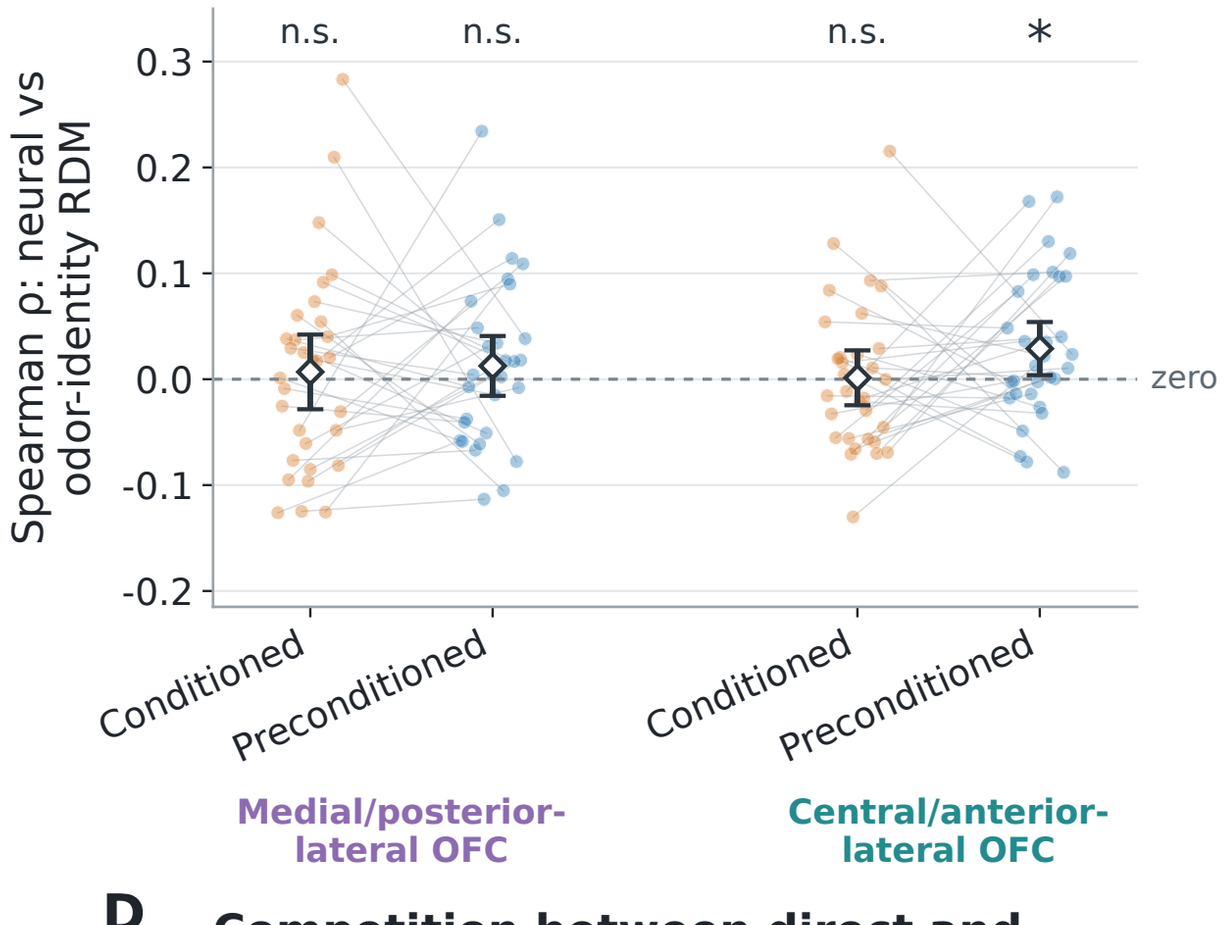

C

Sensory reinstatement of predicted odor identity

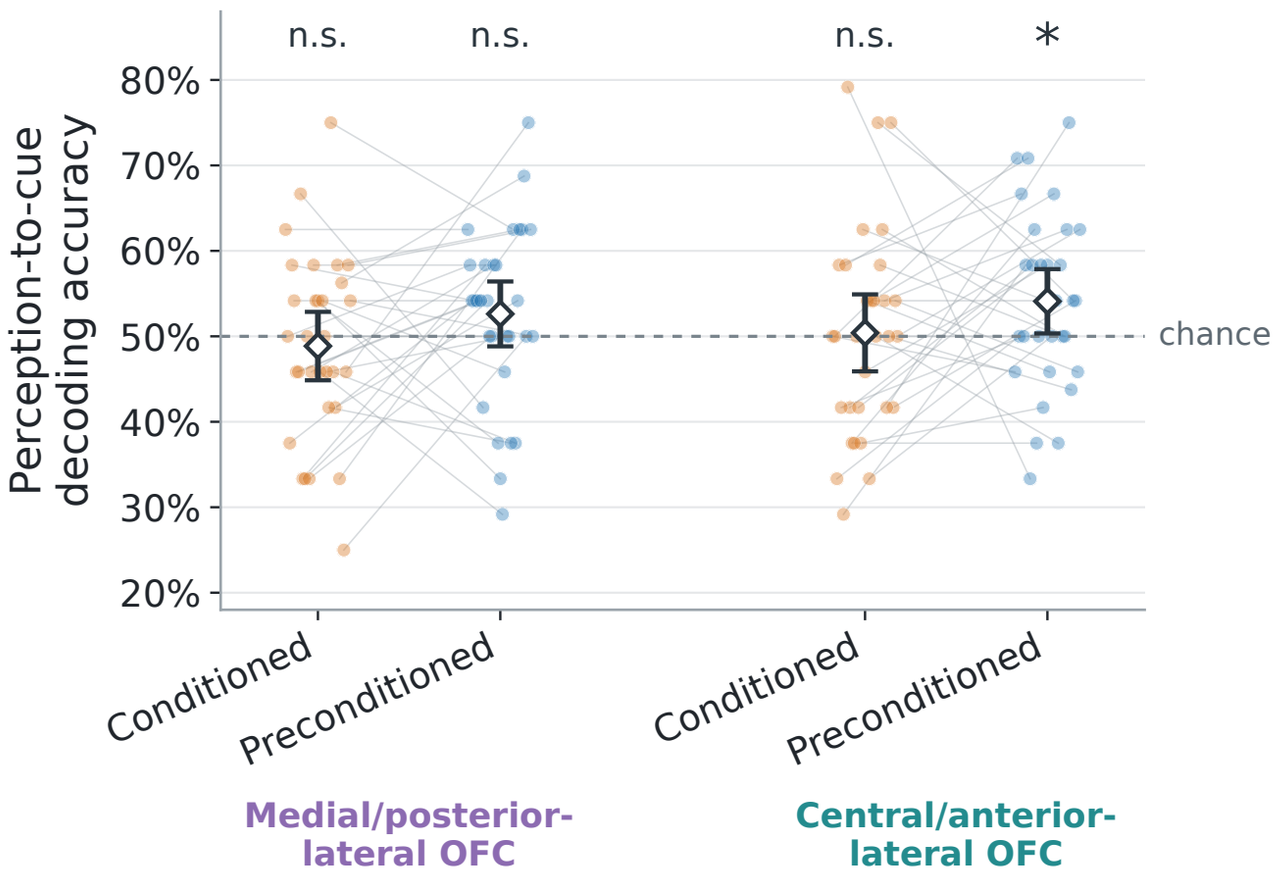

D

Competition between direct and inferred odor-identity representations

