

Super Resolution

Qingyun Li

June 20, 2018

1. Kohonen's self organizing feature maps

One important organizing principle of sensory pathways in the brain is that the placement of neurons is orderly and often reflects some physical characteristic of the external stimulus being sensed [1]. For example, at each level of the auditory pathway, nerve cells and fibers are arranged anatomically in relation to the frequency which elicits the greatest response in each neuron. This tonotopic organization in the auditory cortex [1]. Although much of the lowlevel organization is genetically pre-determined, it is likely that some of the organization at higher levels is created during learning by algorithms which promote self-organization. Kohonen [2] presents one such algorithm which produces what he calls self-organizing feature maps similar to those that occur in the brain.

Kohonen's algorithm creates a vector quantizer by adjusting weights from commom input nodes to M output nodes arranged in a two dimensional grid as shown in Fig. 1.

- [2] T. Kohonen. *Self-Organization and Associative Memory*. Springer-Verlag, 1984. 1

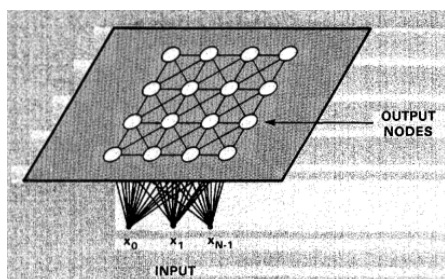


Figure 1: Two-dimensional array of output nodes used to form feature maps.

References

- [1] E. R. Kandel, J. H. Schwartz, T. M. Jessell, S. A. Siegelbaum, A. J. Hudspeth, et al. *Principles of neural science*. McGraw-Hill New York, 2000. 1