

QRodSystems

0.0.19

Generated by Doxygen 1.9.1

1 Hierarchical Index	1
1.1 Class Hierarchy	1
2 Class Index	3
2.1 Class List	3
3 File Index	5
3.1 File List	5
4 Class Documentation	9
4.1 QRS::Core::AbstractDataObject Class Reference	9
4.1.1 Detailed Description	10
4.1.2 Member Function Documentation	10
4.1.2.1 deserialize()	10
4.1.2.2 getAvailableItemKey()	11
4.2 QRS::HierarchyModels::AbstractHierarchyItem Class Reference	11
4.2.1 Detailed Description	12
4.3 QRS::HierarchyModels::AbstractHierarchyModel Class Reference	12
4.3.1 Detailed Description	13
4.3.2 Member Function Documentation	13
4.3.2.1 updateContentExpanded()	13
4.4 QRS::Managers::AbstractManager Class Reference	13
4.4.1 Detailed Description	14
4.5 QRS::Core::AbstractRodComponent Class Reference	15
4.5.1 Detailed Description	16
4.6 QRS::Managers::AbstractRodComponentWidget Class Reference	16
4.6.1 Detailed Description	17
4.7 QRS::Core::AbstractSectionRodComponent Class Reference	17
4.7.1 Detailed Description	18
4.7.2 Member Function Documentation	18
4.7.2.1 deserialize()	18
4.8 QRS::Core::Array< T > Class Template Reference	19
4.8.1 Detailed Description	20
4.9 QRS::TableModels::BaseTableModel Class Reference	20
4.9.1 Detailed Description	21
4.10 QRS::Managers::ConstraintItemDelegate Class Reference	21
4.10.1 Detailed Description	22
4.11 QRS::Core::ConstraintRodComponent Class Reference	22
4.11.1 Detailed Description	23
4.12 QRS::Managers::ConstraintRodComponentWidget Class Reference	24
4.12.1 Detailed Description	25
4.13 QRS::Managers::DataObjectLineEdit Class Reference	25
4.13.1 Detailed Description	26

4.14 QRS::HierarchyModels::DataObjectsHierarchyItem Class Reference	26
4.14.1 Detailed Description	27
4.15 QRS::HierarchyModels::DataObjectsHierarchyModel Class Reference	27
4.15.1 Detailed Description	29
4.16 QRS::Managers::DataObjectsManager Class Reference	29
4.16.1 Detailed Description	31
4.17 QRS::PropertiesModels::DataObjectsPropertiesModel Class Reference	31
4.17.1 Detailed Description	32
4.18 QRS::Managers::DoubleSpinBoxItemDelegate Class Reference	32
4.18.1 Detailed Description	33
4.19 QRS::Core::GeometryRodComponent Class Reference	33
4.19.1 Detailed Description	34
4.20 QRS::Managers::GeometryRodComponentWidget Class Reference	34
4.20.1 Detailed Description	35
4.21 QRS::Core::HierarchyNode Class Reference	35
4.21.1 Detailed Description	36
4.22 QRS::Core::HierarchyTree Class Reference	36
4.22.1 Detailed Description	38
4.23 QRS::Core::LoadRodComponent Class Reference	38
4.23.1 Detailed Description	40
4.24 QRS::Managers::LoadRodComponentWidget Class Reference	40
4.24.1 Detailed Description	41
4.25 QRS::App::LogWidget Class Reference	41
4.25.1 Detailed Description	41
4.26 QRS::App::MainWindow Class Reference	42
4.26.1 Detailed Description	43
4.27 QRS::Managers::ManagersFactory Class Reference	44
4.27.1 Detailed Description	44
4.28 QRS::App::ManagersTab Class Reference	45
4.28.1 Detailed Description	45
4.29 QRS::Core::MaterialRodComponent Class Reference	45
4.29.1 Detailed Description	46
4.30 QRS::Managers::MaterialRodComponentWidget Class Reference	47
4.30.1 Detailed Description	47
4.31 QRS::Core::MatrixDataObject Class Reference	48
4.31.1 Detailed Description	48
4.32 QRS::TableModels::MatrixTableModel Class Reference	49
4.32.1 Detailed Description	49
4.33 QRS::Core::Project Class Reference	50
4.33.1 Detailed Description	52
4.34 QRS::HierarchyModels::ProjectHierarchyModel Class Reference	52
4.34.1 Detailed Description	53

4.35 QRS::HierarchyModels::RodComponentsHierarchyItem Class Reference	53
4.35.1 Detailed Description	54
4.36 QRS::HierarchyModels::RodComponentsHierarchyModel Class Reference	54
4.36.1 Detailed Description	55
4.37 QRS::Managers::RodComponentsManager Class Reference	55
4.37.1 Detailed Description	57
4.38 QRS::Core::Array< T >::Row< U > Struct Template Reference	57
4.38.1 Detailed Description	58
4.39 QRS::Core::ScalarDataObject Class Reference	58
4.39.1 Detailed Description	59
4.40 QRS::Core::SurfaceDataObject Class Reference	59
4.40.1 Detailed Description	60
4.41 QRS::TableModels::SurfaceTableModel Class Reference	60
4.41.1 Detailed Description	61
4.42 QRS::TableModels::TableModelInterface Class Reference	61
4.42.1 Detailed Description	62
4.43 QRS::Core::UserSectionRodComponent Class Reference	62
4.43.1 Detailed Description	63
4.43.2 Member Function Documentation	63
4.43.2.1 isDataComplete()	63
4.44 QRS::Managers::UserSectionRodComponentWidget Class Reference	64
4.44.1 Detailed Description	64
4.45 QRS::Core::VectorDataObject Class Reference	65
4.45.1 Detailed Description	65
4.46 QRS::Graph::View3D Class Reference	66
4.46.1 Detailed Description	66
5 File Documentation	67
5.1 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/controltabs.cpp File Reference	67
5.1.1 Detailed Description	67
5.2 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/controltabs.h File Reference	67
5.2.1 Detailed Description	68
5.3 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/logwidget.cpp File Reference	68
5.3.1 Detailed Description	68
5.4 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/logwidget.h File Reference	69
5.4.1 Detailed Description	69
5.5 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/mainwindow.cpp File Reference	69
5.5.1 Detailed Description	70
5.6 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/mainwindow.h File Reference	70
5.6.1 Detailed Description	70
5.7 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/uiconstants.h File Reference	71
5.7.1 Detailed Description	71

5.8 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractdataobject.cpp File Reference	71
5.8.1 Detailed Description	71
5.9 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractdataobject.h File Reference	72
5.9.1 Detailed Description	72
5.10 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractrodcomponent.cpp File Reference	72
5.10.1 Detailed Description	73
5.11 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractrodcomponent.h File Reference	73
5.11.1 Detailed Description	73
5.12 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractsectionrodcomponent.cpp File Reference	74
5.12.1 Detailed Description	74
5.13 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractsectionrodcomponent.h File Reference	74
5.13.1 Detailed Description	74
5.14 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/aliasdata.h File Reference	75
5.14.1 Detailed Description	75
5.15 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/aliasdataset.h File Reference	75
5.15.1 Detailed Description	75
5.16 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/array.cpp File Reference	76
5.16.1 Detailed Description	76
5.17 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/array.h File Reference	76
5.17.1 Detailed Description	77
5.18 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/constraintrodcomponent.cpp File Reference	77
5.18.1 Detailed Description	77
5.19 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/constraintrodcomponent.h File Reference	77
5.19.1 Detailed Description	78
5.20 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.cpp File Reference	78
5.20.1 Detailed Description	78
5.21 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.h File Reference	78
5.21.1 Detailed Description	79
5.22 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.cpp File Reference	79
5.22.1 Detailed Description	79
5.23 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.h File Reference	79
5.23.1 Detailed Description	80
5.24 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.cpp File Reference	80
5.24.1 Detailed Description	80
5.25 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.h File Reference	80
5.25.1 Detailed Description	81

5.26	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.cpp File Reference	81
5.26.1	Detailed Description	81
5.27	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.h File Reference	81
5.27.1	Detailed Description	82
5.28	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/materialrodcomponent.cpp File Reference	82
5.28.1	Detailed Description	82
5.29	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/materialrodcomponent.h File Reference	82
5.29.1	Detailed Description	83
5.30	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.cpp File Reference	83
5.30.1	Detailed Description	83
5.31	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.h File Reference	83
5.31.1	Detailed Description	84
5.32	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project-base.cpp File Reference	84
5.32.1	Detailed Description	84
5.33	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project-io.cpp File Reference	85
5.33.1	Detailed Description	85
5.34	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project.h File Reference	86
5.34.1	Detailed Description	86
5.35	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/scalardataobject.cpp File Reference	86
5.35.1	Detailed Description	86
5.36	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/scalardataobject.h File Reference	87
5.36.1	Detailed Description	87
5.37	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.cpp File Reference	87
5.37.1	Detailed Description	87
5.38	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.h File Reference	88
5.38.1	Detailed Description	88
5.39	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/usersectionrodcomponent.cpp File Reference	88
5.39.1	Detailed Description	88
5.40	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/usersectionrodcomponent.h File Reference	89
5.40.1	Detailed Description	89
5.41	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.cpp File Reference	89
5.41.1	Detailed Description	89
5.42	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.h File Reference	90
5.42.1	Detailed Description	90
5.43	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/vectordataobject.cpp File Reference	90
5.43.1	Detailed Description	90
5.44	/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/vectordataobject.h File Reference	91
5.44.1	Detailed Description	91
5.45	/home/qinterfly/Library/Projects/Current/QRodSystems/src/main/main.cpp File Reference	91

5.45.1 Detailed Description	92
5.46 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractmanager.cpp File Reference	92
5.46.1 Detailed Description	92
5.47 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractmanager.h File Reference	92
5.47.1 Detailed Description	93
5.48 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractrodcomponentwidget.cpp File Reference	93
5.48.1 Detailed Description	93
5.49 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractrodcomponentwidget.h File Reference	93
5.49.1 Detailed Description	94
5.50 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.cpp File Reference	94
5.50.1 Detailed Description	94
5.51 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.h File Reference	94
5.51.1 Detailed Description	95
5.52 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintrodcomponentwidget.cpp File Reference	95
5.52.1 Detailed Description	95
5.53 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintrodcomponentwidget.h File Reference	96
5.53.1 Detailed Description	96
5.54 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectlineedit.cpp File Reference	96
5.54.1 Detailed Description	96
5.55 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectlineedit.h File Reference	97
5.55.1 Detailed Description	97
5.56 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.cpp File Reference	97
5.56.1 Detailed Description	98
5.57 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.h File Reference	98
5.57.1 Detailed Description	98
5.58 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/doublespinboxitemdelegate.cpp File Reference	99
5.58.1 Detailed Description	99
5.59 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/doublespinboxitemdelegate.h File Reference	99
5.59.1 Detailed Description	99
5.60 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.cpp File Reference	100
5.60.1 Detailed Description	100

5.61	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.h	
	File Reference	100
	5.61.1 Detailed Description	100
5.62	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.cpp	
	File Reference	101
	5.62.1 Detailed Description	101
5.63	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.h	
	File Reference	101
	5.63.1 Detailed Description	102
5.64	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/managersfactory.cpp	File Reference
		102
	5.64.1 Detailed Description	102
5.65	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/managersfactory.h	File Reference
		102
	5.65.1 Detailed Description	103
5.66	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.cpp	
	File Reference	103
	5.66.1 Detailed Description	103
5.67	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.h	
	File Reference	104
	5.67.1 Detailed Description	104
5.68	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.cpp	
	File Reference	104
	5.68.1 Detailed Description	105
5.69	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.h	File Reference
		105
	5.69.1 Detailed Description	105
5.70	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/usersectionrodcomponentwidget.cpp	
	File Reference	106
	5.70.1 Detailed Description	106
5.71	/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/usersectionrodcomponentwidget.h	
	File Reference	106
	5.71.1 Detailed Description	106
5.72	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.cpp	
	File Reference	107
	5.72.1 Detailed Description	107
5.73	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.h	
	File Reference	107
	5.73.1 Detailed Description	107
5.74	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchymodel.cpp	
	File Reference	108
	5.74.1 Detailed Description	108
5.75	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchymodel.h	
	File Reference	108
	5.75.1 Detailed Description	109

5.76 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchyitem.cpp	
File Reference	109
5.76.1 Detailed Description	109
5.77 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchyitem.h	
File Reference	109
5.77.1 Detailed Description	110
5.78 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.cpp	
File Reference	110
5.78.1 Detailed Description	110
5.79 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.h	
File Reference	111
5.79.1 Detailed Description	111
5.80 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/projecthierarchymodel.cpp	
File Reference	111
5.80.1 Detailed Description	111
5.81 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/projecthierarchymodel.h	
File Reference	112
5.81.1 Detailed Description	112
5.82 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.cpp	
File Reference	112
5.82.1 Detailed Description	113
5.83 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.h	
File Reference	113
5.83.1 Detailed Description	113
5.84 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchymodel.cpp	
File Reference	113
5.84.1 Detailed Description	114
5.85 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchymodel.h	
File Reference	114
5.85.1 Detailed Description	114
5.86 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.cpp	
File Reference	114
5.86.1 Detailed Description	115
5.87 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.h	
File Reference	115
5.87.1 Detailed Description	115
5.88 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/basetablemodel.cpp	File
Reference	115
5.88.1 Detailed Description	116
5.89 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/basetablemodel.h	File Ref-
erence	116
5.89.1 Detailed Description	116
5.90 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.cpp	File
Reference	116
5.90.1 Detailed Description	117

5.91	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.h	File Reference	117
5.91.1	Detailed Description		117
5.92	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/surfacetablemodel.cpp	File Reference	117
5.92.1	Detailed Description		118
5.93	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/surfacetablemodel.h	File Reference	118
5.93.1	Detailed Description		118
5.94	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.cpp	File Reference	118
5.94.1	Detailed Description		119
5.95	/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.h	File Reference	119
5.95.1	Detailed Description		119
5.96	/home/qinterfly/Library/Projects/Current/QRodSystems/src/render/view3d.cpp	File Reference	119
5.96.1	Detailed Description		120
5.97	/home/qinterfly/Library/Projects/Current/QRodSystems/src/render/view3d.h	File Reference	120
5.97.1	Detailed Description		120

Chapter 1

Hierarchical Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

QRS::Core::Array< T >	19
QRS::Core::HierarchyNode	35
QRS::Core::HierarchyTree	36
QDialog	
QRS::Managers::AbstractManager	13
QRS::Managers::DataObjectsManager	29
QRS::Managers::RodComponentsManager	55
QLineEdit	
QRS::Managers::DataObjectLineEdit	25
QMainWindow	
QRS::App::MainWindow	42
QObject	
QRS::Core::AbstractDataObject	9
QRS::Core::MatrixDataObject	48
QRS::Core::ScalarDataObject	58
QRS::Core::SurfaceDataObject	59
QRS::Core::VectorDataObject	65
QRS::Core::AbstractRodComponent	15
QRS::Core::AbstractSectionRodComponent	17
QRS::Core::UserSectionRodComponent	62
QRS::Core::ConstraintRodComponent	22
QRS::Core::GeometryRodComponent	33
QRS::Core::LoadRodComponent	38
QRS::Core::MaterialRodComponent	45
QRS::Core::MechanicalRodComponent	??
QRS::Core::Project	50
QRS::Managers::ManagersFactory	44
QOpenGLFunctions	
QRS::Graph::View3D	66
QOpenGLWidget	
QRS::Graph::View3D	66
QStandardItem	
QRS::HierarchyModels::AbstractHierarchyItem	11
QRS::HierarchyModels::DataObjectsHierarchyItem	26
QRS::HierarchyModels::RodComponentsHierarchyItem	53

QStandardItemModel	
QRS::HierarchyModels::AbstractHierarchyModel	12
QRS::HierarchyModels::DataObjectsHierarchyModel	27
QRS::HierarchyModels::ProjectHierarchyModel	52
QRS::HierarchyModels::RodComponentsHierarchyModel	54
QRS::PropertiesModels::DataObjectsPropertiesModel	31
QRS::TableModels::BaseTableModel	20
QRS::TableModels::MatrixTableModel	49
QRS::TableModels::SurfaceTableModel	60
QStyledItemDelegate	
QRS::Managers::ConstraintItemDelegate	21
QRS::Managers::DoubleSpinBoxItemDelegate	32
QTableWidget	
QRS::App::LogWidget	41
QWidget	
QRS::App::ManagersTab	45
QRS::Managers::AbstractRodComponentWidget	16
QRS::Managers::ConstraintRodComponentWidget	24
QRS::Managers::GeometryRodComponentWidget	34
QRS::Managers::LoadRodComponentWidget	40
QRS::Managers::MaterialRodComponentWidget	47
QRS::Managers::MechanicalRodComponentWidget	??
QRS::Managers::UserSectionRodComponentWidget	64
QRS::Core::Array< T >::Row< U >	57
QRS::TableModels::TableModelInterface	61
QRS::TableModels::BaseTableModel	20
QRS::TableModels::MatrixTableModel	49
QRS::TableModels::SurfaceTableModel	60

Chapter 2

Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

QRS::Core::AbstractDataObject	9
Data object which is designed in the way to be represented in a table easily	
QRS::HierarchyModels::AbstractHierarchyItem	11
Item to represent a hierarchy of elements of the same type	
QRS::HierarchyModels::AbstractHierarchyModel	12
Hierarchy model which enables one to drag and drop elements of the same type	
QRS::Managers::AbstractManager	13
Abstract manager to create objects of different types	
QRS::Core::AbstractRodComponent	15
Component of the rod structure which characterizes one of its properties	
QRS::Managers::AbstractRodComponentWidget	16
Widget to construct rod components of different types	
QRS::Core::AbstractSectionRodComponent	17
General cross section of a rod	
QRS::Core::Array< T >	19
Numerical array class	
QRS::TableModels::BaseTableModel	20
Table model to represent either a scalar or vector data object	
QRS::Managers::ConstraintItemDelegate	21
Class to specify how options of a constraint can be edited	
QRS::Core::ConstraintRodComponent	22
Component to restrict movements of a rod	
QRS::Managers::ConstraintRodComponentWidget	24
Widget to construct constraints of a rod	
QRS::Managers::DataObjectLineEdit	25
Line edit widget to hold a pointer to a data object	
QRS::HierarchyModels::DataObjectsHierarchyItem	26
Item to represent a hierarchy of data objects	
QRS::HierarchyModels::DataObjectsHierarchyModel	27
Tree model to represent and modify a hierarchy of data objects	
QRS::Managers::DataObjectsManager	29
Manager to create objects of different types: scalars, vectors, matrices and surfaces	
QRS::PropertiesModels::DataObjectsPropertiesModel	31
Model to represent properties of selected data objects	
QRS::Managers::DoubleSpinBoxItemDelegate	32
Class to specify how table values can be edited	

QRS::Core::GeometryRodComponent	
Geometrical configuration of a rod	33
QRS::Managers::GeometryRodComponentWidget	
Widget to construct a geometrical rod component	34
QRS::Core::HierarchyNode	
Hierarchy representative	35
QRS::Core::HierarchyTree	
Hierarchy of data objects (n-array tree)	36
QRS::Core::LoadRodComponent	
Load applied to a rod	38
QRS::Managers::LoadRodComponentWidget	
Widget to construct a load applied to a rod	40
QRS::App::LogWidget	
Log all the messages sent	41
QRS::App::MainWindow	
The main window of the program	42
QRS::Managers::ManagersFactory	
Factory to create managers which utilize and modify project data	44
QRS::App::ManagersTab	
A toolbar consisted of object designers	45
QRS::Core::MaterialRodComponent	
Material properties of a rod	45
QRS::Managers::MaterialRodComponentWidget	
Widget to construct a material rod component	47
QRS::Core::MatrixDataObject	
Matrix data object	48
QRS::TableModels::MatrixTableModel	
Table model to represent a matrix data object	49
QRS::Core::MechanicalRodComponent	
Stiffness and mass distributions of a rod	??
QRS::Managers::MechanicalRodComponentWidget	
Widget to construct mechanical rod components consisted of stiffness and mass distributions	??
QRS::Core::Project	
Project class to interact with a created system of rods	50
QRS::HierarchyModels::ProjectHierarchyModel	
Project hierarchy representative	52
QRS::HierarchyModels::RodComponentsHierarchyItem	
Item to represent a hierarchy of rod components	53
QRS::HierarchyModels::RodComponentsHierarchyModel	
Tree model to represent and modify a hierarchy of rod components	54
QRS::Managers::RodComponentsManager	
Manager to create rod components, such as a geometry, cross section and force	55
QRS::Core::Array< T >::Row< U >	
Proxy class to acquire a row by index	57
QRS::Core::ScalarDataObject	
Scalar data object	58
QRS::Core::SurfaceDataObject	
Surface data object	59
QRS::TableModels::SurfaceTableModel	
Table model to represent a surface data object	60
QRS::TableModels::TableModelInterface	
User interface to add and remove items	61
QRS::Core::UserSectionRodComponent	
Section which properties are defined by user	62
QRS::Managers::UserSectionRodComponentWidget	
Widget to construct a user-defined section of a rod	64
QRS::Core::VectorDataObject	
Vector data object	65

[QRS::Graph::View3D](#)

A widget to represent the resulted rod system [66](#)

Chapter 3

File Index

3.1 File List

Here is a list of all documented files with brief descriptions:

/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ controltabs.cpp	
Implementation of the ControlTabs class	67
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ controltabs.h	
Declaration of the ControlTabs class	67
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ logwidget.cpp	
Implementation of the LogWidget class	68
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ logwidget.h	
Declaration of the LogWidget class	69
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ mainwindow.cpp	
Implementation of the MainWindow class	69
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ mainwindow.h	
Declaration of the MainWindow class	70
/home/qinterfly/Library/Projects/Current/QRodSystems/src/central/ uiconstants.h	
Common graphical constants shared between several windows	71
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractdataobject.cpp	
Implementation of the AbstractDataObject class	71
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractdataobject.h	
Declaration of the AbstractDataObject class	72
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractrodcomponent.cpp	
Definition of the AbstractRodComponent class	72
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractrodcomponent.h	
Declaration of the AbstractRodComponent class	73
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractsectionrodcomponent.cpp	
Definition of the AbstractSectionRodComponent class	74
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ abstractsectionrodcomponent.h	
Declaration of the AbstractSectionRodComponent class	74
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ aliasdata.h	
Specification of data types used in a project	75
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ aliasdataset.h	
Specification of types of datasets used in a project	75
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ array.cpp	
Implementation of the Array class	76
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ array.h	
Declaration of the Array class	76
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/ constraintrodcomponent.cpp	
Definition of the ConstraintRodComponent class	77

/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/constraintrodcomponent.h	
Declaration of the ConstraintRodComponent class	77
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.cpp	
Definition of the GeometryRodComponent class	78
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.h	
Declaration of the GeometryRodComponent class	78
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.cpp	
Implementation of the HierarchyNode class	79
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.h	
Declaration of the HierarchyNode class	79
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.cpp	
Implementation of the HierarchyTree class	80
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.h	
Declaration of the HierarchyTree class	80
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.cpp	
Definition of the LoadRodComponent class	81
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.h	
Declaration of the LoadRodComponent class	81
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/materialrodcomponent.cpp	
Definition of the MaterialRodComponent class	82
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/materialrodcomponent.h	
Declaration of the MaterialRodComponent class	82
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.cpp	
Implementation of the MatrixDataObject class	83
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.h	
Declaration of the MatrixDataObject class	83
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/mechanicalrodcomponent.cpp	
Definition of the MechanicalRodComponent class	??
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/mechanicalrodcomponent.h	
Declaration of the MechanicalRodComponent class	??
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project-base.cpp	
Implementation of the Project class	84
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project-io.cpp	
Implementation of the Project class	85
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project.h	
Declaration of the Project class	86
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/scalardataobject.cpp	
Implementation of the ScalarDataObject class	86
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/scalardataobject.h	
Declaration of the ScalarDataObject class	87
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.cpp	
Implementation of the SurfaceDataObject class	87
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.h	
Declaration of the SurfaceDataObject class	88
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/usersectionrodcomponent.cpp	
Definition of the UserSectionRodComponent class	88
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/usersectionrodcomponent.h	
Declaration of the UserSectionRodComponent class	89
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.cpp	
Implementation of utilities	89
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.h	
Declaration of utilities	90
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/vectordataobject.cpp	
Implementation of the VectorDataObject class	90
/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/vectordataobject.h	
Declaration of the VectorDataObject class	91
/home/qinterfly/Library/Projects/Current/QRodSystems/src/main/main.cpp	
The startup function	91

/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractmanager.cpp	
Definition of the AbstractManager class	92
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractmanager.h	
Declaration of the AbstractManager class	92
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractrodcomponentwidget.cpp	
Definition of the AbstractRodComponentWidget class	93
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractrodcomponentwidget.h	
Declaration of the AbstractRodComponentWidget class	93
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.cpp	
Definition of the ComboBoxItemDelegate class	94
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.h	
Declaration of the ComboBoxItemDelegate class	94
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintrodcomponentwidget.cpp	
Definition of the ConstraintRodComponentWidget class	95
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintrodcomponentwidget.h	
Declaration of the ConstraintRodComponentWidget class	96
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectlineedit.cpp	
Definition of the DataPointerLineEdit class	96
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectlineedit.h	
Declaration of the DataPointerLineEdit class	97
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.cpp	
Implementation of the DataObjectsManager class	97
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.h	
Declaration of the DataObjectsManager class	98
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/doublespinboxitemdelegate.cpp	
Definition of the DoubleSpinBoxItemDelegate class	99
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/doublespinboxitemdelegate.h	
Declaration of the DoubleSpinBoxItemDelegate class	99
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.cpp	
Definiton of the GeometryComponentWidget class	100
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.h	
Declaration of the GeometryComponentWidget class	100
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.cpp	
Definition of the LoadRodComponentWidget class	101
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.h	
Declaration of the LoadRodComponentWidget class	101
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/managersfactory.cpp	
Definition of the ManagersFactory class	102
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/managersfactory.h	
Declaration of the ManagersFactory class	102
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.cpp	
Definition of the MaterialRodComponentWidget class	103
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.h	
Declaration of the MaterialRodComponentWidget class	104
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/mechanicalrodcomponentwidget.cpp	
Definition of the MechanicalRodComponentWidget class	??
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/mechanicalrodcomponentwidget.h	
Declaration of the MechanicalRodComponentWidget class	??
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.cpp	
Definition of the RodComponentsManager class	104
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.h	
Declaration of the RodComponentsManager class	105
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/usersectionrodcomponentwidget.cpp	
Definition of the UserSectionRodComponentWidget class	106
/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/usersectionrodcomponentwidget.h	
Declaration of the UserSectionRodComponentWidget class	106
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.cpp	
Definition of the AbstractHierarchyItem class	107

/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.h	
Declaration of the AbstractHierarchyItem class	107
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchymodel.cpp	
Definition of the AbstractHierarchyModel class	108
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchymodel.h	
Declaration of the AbstractHierarchyModel class	108
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchyitem.cpp	
Definition of the DataObjectsHierarchyItem class	109
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchyitem.h	
Declaration of the DataObjectsHierarchyItem class	109
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.cpp	
Definition of the DataObjectsHierarchyModel class	110
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.h	
Declaration of the DataObjectsHierarchyModel class	111
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/projecthierarchymodel.cpp	
Definition of the ProjectHierarchyModel class	111
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/projecthierarchymodel.h	
Declaration of the ProjectHierarchyModel class	112
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.cpp	
Definition of the RodComponentsHierarchyItem class	112
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.h	
Declaration of the RodComponentsHierarchyItem class	113
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchymodel.cpp	
Definition of the RodComponentsHierarchyModel class	113
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchymodel.h	
Declaration of the RodComponentsHierarchyModel class	114
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.cpp	
Definition of the DataObjectsPropertiesModel class	114
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.h	
Declaration of the DataObjectsPropertiesModel class	115
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/basetablemodel.cpp	
Implementation of the BaseTableModel class	115
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/basetablemodel.h	
Declaration of the BaseTableModel class	116
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.cpp	
Implementation of the MatrixTableModel class	116
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.h	
Declaration of the MatrixTableModel class	117
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/surfacetablemodel.cpp	
Implementation of the SurfaceTableModel class	117
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/surfacetablemodel.h	
Declaration of the SurfaceTableModel class	118
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.cpp	
Implementation of static functions of TableModelInterface	118
/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.h	
Declaration of the TableModelInterface	119
/home/qinterfly/Library/Projects/Current/QRodSystems/src/render/view3d.cpp	
Implementation of the View3D class	119
/home/qinterfly/Library/Projects/Current/QRodSystems/src/render/view3d.h	
Declaration of the View3D class	120

Chapter 4


Class Documentation

4.1 QRS::Core::AbstractDataObject Class Reference

Data object which is designed in the way to be represented in a table easily.

```
#include <abstractdataobject.h>
```

Inheritance diagram for QRS::Core::AbstractDataObject:

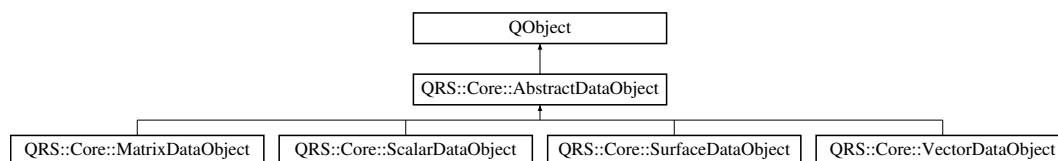

Public Types

- enum **ObjectType** { **kScalar** , **kVector** , **kMatrix** , **kSurface** }

Public Member Functions

- [AbstractDataObject](#) (ObjectType type, QString const &name)
Base constructor.
- virtual [AbstractDataObject](#) * **clone** () const =0
- virtual [DataItemType](#) & **addItem** (DataKeyType key)=0
- void [removeItem](#) (DataValueType key)
Remove an entity with the specified key.
- bool [changeItemKey](#) (DataKeyType oldKey, DataKeyType newKey, DataHolder *items=nullptr)
Modify a key existed.
- DataValueType [getAvailableItemKey](#) (DataValueType key, DataHolder const *items=nullptr) const
- bool [setArrayValue](#) (DataKeyType key, DataValueType newValue, IndexType iRow=0, IndexType iColumn=0)
Set an array value with the specified indices.
- quint32 **numberOfItems** () const
- DataHolder const & **getItems** ()
- DataIDType **id** () const

- ObjectType **type** () const
- QString const & **name** () const
- void **setName** (QString const &name)
- virtual void **serialize** (QDataStream &stream) const
Serialize an abstract data object.
- virtual void **deserialize** (QDataStream &stream)
Partly deserialize an abstract data object.
- virtual void **import** (QTextStream &stream)=0

Static Public Member Functions

- static DataIDType **maxObjectID** ()
- static void **setMaxObjectID** (DataIDType iMaxObjectID)

Protected Attributes

- const ObjectType **mkType**
- QString **mName**
- DataIDType **mID**
- DataHolder **mItems**

Static Private Attributes

- static DataIDType **smMaxObjectID** = 0

Friends

- QDataStream & **operator<<** (QDataStream &stream, [AbstractDataObject](#) const &obj)
Print a data object to a stream.

4.1.1 Detailed Description

Data object which is designed in the way to be represented in a table easily.

4.1.2 Member Function Documentation

4.1.2.1 deserialize()

```
void AbstractDataObject::deserialize (
    QDataStream & stream ) [virtual]
```

Partly deserialize an abstract data object.

It is assumed that a type and name have already been assigned. So, only an identifier and items need to be set.

Reimplemented in [QRS::Core::SurfaceDataObject](#).

4.1.2.2 getAvailableItemKey()

```
DataValueType AbstractDataObject::getAvailableItemKey (
    DataValueType key,
    DataHolder const * items = nullptr ) const
```

Check if a given key is unique

Returns

Returns the input value of the key if it is unique, otherwise – a first available key

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractdataobject.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractdataobject.cpp](#)

4.2 QRS::HierarchyModels::AbstractHierarchyItem Class Reference

Item to represent a hierarchy of elements of the same type.

```
#include <abstracthierarchyitem.h>
```

Inheritance diagram for QRS::HierarchyModels::AbstractHierarchyItem:

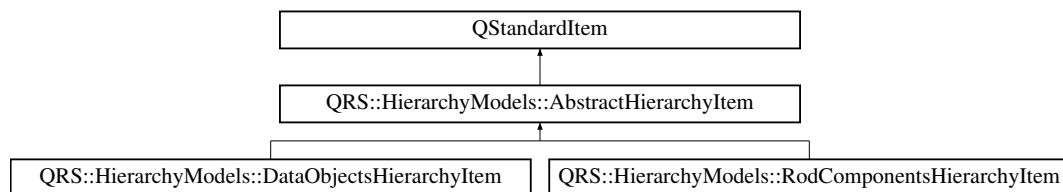

Public Types

- enum **ItemType** { **kDataObjects** = QStandardItem::UserType , **kRodComponents** }

Public Member Functions

- **AbstractHierarchyItem** (QIcon const &icon, QString const &text, [Core::HierarchyNode](#) *pNode)
- void [writePointer](#) (QDataStream &out) const
Write the pointer to the current item to a stream.
- virtual int **type** () const =0

Static Public Member Functions

- static [AbstractHierarchyItem](#) * [readPointer](#) (QDataStream &in)
Retrieve a pointer to an item from a stream.

Protected Attributes

- `Core::HierarchyNode * mpNode = nullptr`

Friends

- class **AbstractHierarchyModel**

4.2.1 Detailed Description

Item to represent a hierarchy of elements of the same type.

The documentation for this class was generated from the following files:


- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.h`
- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.cpp`

4.3 QRS::HierarchyModels::AbstractHierarchyModel Class Reference

Hierarchy model which enables one to drag and drop elements of the same type.

```
#include <abstracthierarchymodel.h>
```

Inheritance diagram for QRS::HierarchyModels::AbstractHierarchyModel:

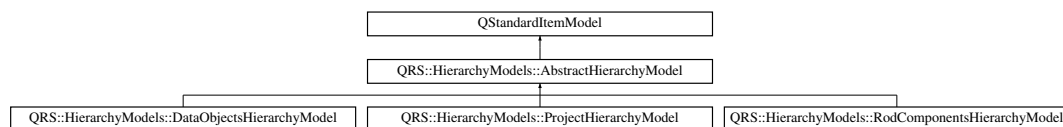

Signals

- void `hierarchyChanged` ()
Emitted when hierarchical elements get renamed, moved or deleted.

Public Member Functions

- **AbstractHierarchyModel** (QString const &mimeType, QTreeView *pView=nullptr)
- virtual void **updateContent** ()=0
- virtual void **clearContent** ()=0
- Qt::DropActions `supportedDragActions` () const override
Specify allowed drag actions.
- Qt::DropActions `supportedDropActions` () const override
Specify allowed drop actions.
- QStringList `mimeTypes` () const override
Retrieve the mime types.
- QMimeData * `mimeData` (const QModelIndexList &indices) const override
Encode each item according to a given list of indices.
- bool `dropMimeData` (QMimeData const *pMimeData, Qt::DropAction action, int row, int column, const QModelIndex &parent) override
Process the drop action.

Protected Attributes

- QString const **mkMimeType**

Private Member Functions

- bool [processDropOnItem](#) (QDataStream &stream, int &numItems, QModelIndex const &indexParent)
Merge several items into one entity.
- bool [processDropBetweenItems](#) (QDataStream &stream, int &numItems, QModelIndex const &indexParent, int row)
Change the order of items.
- void [retrieveExpandedState](#) (NodesState &nodesState, QModelIndex const &indexParent, QTreeView const *pView)
Retrieve information about whether each directory is expanded.
- void [setExpandedState](#) (NodesState &nodesState, QModelIndex const &indexParent, QTreeView *pView)
Set an expanded state of each directory.
- void [updateContentExpanded](#) ()

4.3.1 Detailed Description

Hierarchy model which enables one to drag and drop elements of the same type.

4.3.2 Member Function Documentation

4.3.2.1 updateContentExpanded()

```
void AbstractHierarchyModel::updateContentExpanded ( ) [private]
```

Since items are destroyed whenever the content is updated, an expanded state of each directory is saved and then set again.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[abstracthierarchymodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[abstracthierarchymodel.cpp](#)

4.4 QRS::Managers::AbstractManager Class Reference

Abstract manager to create objects of different types.

```
#include <abstractmanager.h>
```

Inheritance diagram for QRS::Managers::AbstractManager:

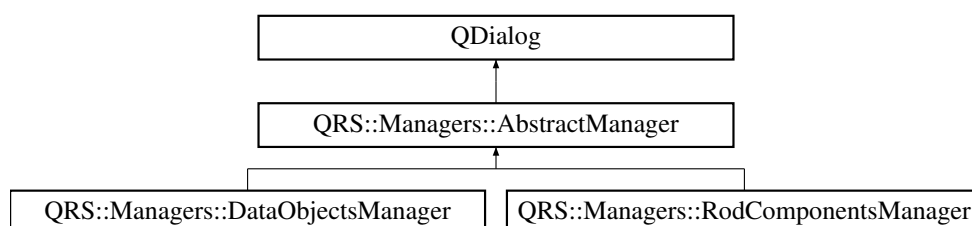

Public Types

- enum **ManagerType** { **kDataObjects** , **kRodComponents** , **kRodConstructor** }

Public Slots

- virtual void **apply** ()=0

Signals

- void **closed** (QRS::Managers::AbstractManager::ManagerType type)

Public Member Functions

- **AbstractManager** (QString &lastPath, QSettings &settings, ManagerType type, QString groupName, QWidget *parent=nullptr)
- void **saveSettings** ()
Save settings to a file.
- void **restoreSettings** ()
Restore settings from a file.

Protected Member Functions

- void **closeEvent** (QCloseEvent *pEvent) override
Save settings and delete handling widgets before closing the window.
- void **setToolBarShortcutHints** (QToolBar *pToolBar)
Helper function to add a shortcut hint to all actions which a toolbar contains.

Protected Attributes

- ads::CDockManager * **mpDockManager** = nullptr
- QString & **mLastPath**

Private Attributes

- QSettings & **mSettings**
- ManagerType const **mkType**
- QString const **mkGroupName**

4.4.1 Detailed Description

Abstract manager to create objects of different types.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[abstractmanager.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[abstractmanager.cpp](#)

4.5 QRS::Core::AbstractRodComponent Class Reference

Component of the rod structure which characterizes one of its properties.

```
#include <abstractrodcomponent.h>
```

Inheritance diagram for QRS::Core::AbstractRodComponent:

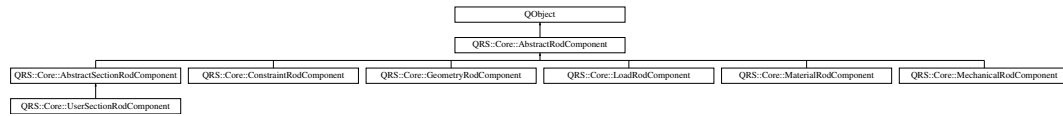

Public Types

- enum **ComponentType** {
kGeometry , **kSection** , **kMaterial** , **kLoad** ,
kConstraint , **kMechanical** }

Public Member Functions

- **AbstractRodComponent** (ComponentType componentType, QString const &name)
- virtual [AbstractRodComponent](#) * **clone** () const =0
- virtual bool **isDataComplete** () const =0
- DataIDType **id** () const
- ComponentType **componentType** () const
- QString const & **name** () const
- void **setName** (QString const &name)
- virtual void **serialize** (QDataStream &stream) const =0
- virtual void **deserialize** (QDataStream &stream, DataObjects const &dataObjects)=0
- virtual void **resolveReferences** (DataObjects const &dataObjects)=0

Static Public Member Functions

- static DataIDType **maxComponentID** ()
- static void **setMaxComponentID** (DataIDType iMaxComponentID)

Protected Member Functions

- void [writeDataObjectPointer](#) (QDataStream &stream, [AbstractDataObject](#) const *pDataObject) const
Helper function to write the identifier of a data object.
- [AbstractDataObject](#) const * [readDataObjectPointer](#) (QDataStream &stream, DataObjects const &dataObjects) const
Helper function to retrieve the pointer to the data object by its identifier.
- [AbstractDataObject](#) const * [getDataObject](#) (DataObjects const &dataObjects, DataIDType id) const
Retrieve a data object from a set by id.
- [AbstractDataObject](#) const * [substituteDataObject](#) (DataObjects const &dataObjects, [AbstractDataObject](#) const *pDataObject) const
Substitute a data object with its updated version.

Protected Attributes

- ComponentType const **mkComponentType**
- QString **mName**
- DataIDType **mID**

Static Private Attributes

- static DataIDType **smMaxComponentID** = 0

Friends

- QDataStream & **operator<<** (QDataStream &stream, [AbstractRodComponent](#) const &component)
Print a rod component to a stream.

4.5.1 Detailed Description

Component of the rod structure which characterizes one of its properties.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractrodcomponent.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractrodcomponent.cpp](#)

4.6 QRS::Managers::AbstractRodComponentWidget Class Reference

Widget to construct rod components of different types.

```
#include <abstractrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::AbstractRodComponentWidget:



Signals

- void **modified** ()
- void **editDataObjectRequested** (Core::DataIDType id)

Public Member Functions

- **AbstractRodComponentWidget** (QString const &mimeType, QWidget *parent=nullptr)

Protected Member Functions

- void [setDataObjectEditConnections](#) ([DataObjectLineEdit](#) *pEdit, DataObjectSetFun &setFun)
Specify connections of an editor which hold pointers to data objects of different types.

Protected Attributes

- QString const **mkMimeType**

4.6.1 Detailed Description

Widget to construct rod components of different types.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[abstractrodcomponentwidget.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[abstractrodcomponentwidget.cpp](#)

4.7 QRS::Core::AbstractSectionRodComponent Class Reference

General cross section of a rod.

```
#include <abstractsectionrodcomponent.h>
```

Inheritance diagram for QRS::Core::AbstractSectionRodComponent:

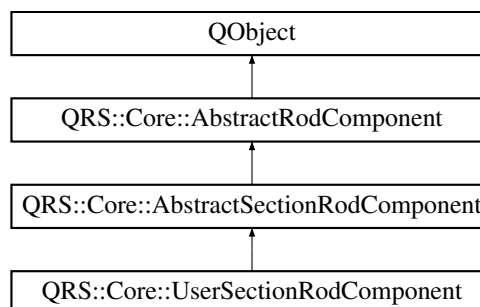

Public Types

- enum **SectionType** { **kUserDefined** }

Public Member Functions

- **AbstractSectionRodComponent** (SectionType sectionType, QString const &name)
- virtual [~AbstractSectionRodComponent](#) ()=0
Decrease a number of instances while being destroyed.
- void [serialize](#) (QDataStream &stream) const override
Serialize a cross section.
- void [deserialize](#) (QDataStream &stream, DataObjects const &dataObjects) override
Partly deserialize an abstract rod component.
- void [resolveReferences](#) (DataObjects const &dataObjects) override
Resolve references of a cross-section.
- SectionType **sectionType** () const

Static Public Member Functions

- static quint32 **numberInstances** ()

Protected Member Functions

- void [copyIntegratedProperties](#) ([AbstractSectionRodComponent](#) const *pSection)
Copy integrated properties of a cross section.

Protected Attributes

- SectionType const **mkSectionType**
- QPointer< [ScalarDataObject](#) const > **mpArea**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMomentTorsional**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMomentX**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMomentY**
- QPointer< [ScalarDataObject](#) const > **mpCenterCoordinateX**
- QPointer< [ScalarDataObject](#) const > **mpCenterCoordinateY**

Static Protected Attributes

- static quint32 **smNumInstances** = 0

4.7.1 Detailed Description

General cross section of a rod.

4.7.2 Member Function Documentation

4.7.2.1 deserialize()

```
void AbstractSectionRodComponent::deserialize (
    QDataStream & stream,
    DataObjects const & dataObjects ) [override], [virtual]
```

Partly deserialize an abstract rod component.

It is assumed that a type and name have already been assigned. So, only integrated properties need to be set.

Implements [QRS::Core::AbstractRodComponent](#).

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractsectionrodcomponent.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[abstractsectionrodcomponent.cpp](#)

4.8 QRS::Core::Array< T > Class Template Reference

Numerical array class.

```
#include <array.h>
```

Classes

- struct [Row](#)
Proxy class to acquire a row by index.

Public Member Functions

- **Array** (IndexType numRows=0, IndexType numCols=0)
- [Array](#) ([Array](#)< T > const &another)
Copy constructor.
- [Array](#) ([Array](#)< T > &&another)
Move constructor.
- T * **data** ()
- void [resize](#) (IndexType numRows, IndexType numCols)
Resize and copy previous values if possible.
- void [removeColumn](#) (IndexType iRemoveColumn)
Remove a column by index.
- void [swapColumns](#) (IndexType iFirstColumn, IndexType iSecondColumn)
Swap two columns.
- IndexType **rows** () const
- IndexType **cols** () const
- IndexType **size** () const
- [Row](#)< T > **operator[]** (IndexType iRow)
- [Row](#)< T > **operator[]** (IndexType iRow) const
- [Array](#) & **operator=** ([Array](#)< T > const &another)
Assignment operator.

Private Attributes

- IndexType [mNumRows](#)
Number of rows.
- IndexType [mNumCols](#)
Number of columns.
- T * [mpData](#) = nullptr
Pointer to the data stored.

Friends

- template<typename K >
QDebug [operator<<](#) (QDebug stream, [Array](#)< K > &array)
Print all array values using the matrix format.
- template<typename K >
QDataStream & [operator<<](#) (QDataStream &stream, [Array](#)< K > const &array)
Write an array to a stream.
- template<typename K >
QDataStream & [operator>>](#) (QDataStream &stream, [Array](#)< K > &array)
Read an array from a stream.

4.8.1 Detailed Description

```
template<typename T>
class QRS::Core::Array< T >
```

Numerical array class.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/array.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/array.cpp](#)

4.9 QRS::TableModels::BaseTableModel Class Reference

Table model to represent either a scalar or vector data object.

```
#include <basetablemodel.h>
```

Inheritance diagram for QRS::TableModels::BaseTableModel:

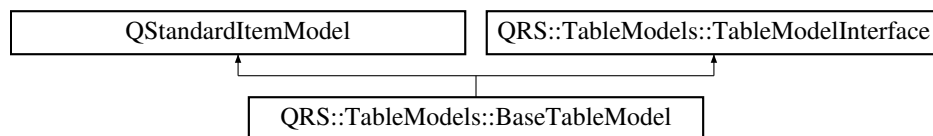

Public Member Functions

- **BaseTableModel** (QWidget *parent=nullptr)
- void [setDataObject](#) ([Core::AbstractDataObject](#) *pDataObject)
Set a data object to represent.
- bool [setData](#) (const QModelIndex &indexEdit, const QVariant &value, int role=Qt::EditRole) override
Set the data acquired from a delegate.
- void [insertItemAfterSelected](#) (QItemSelectionModel *pSelectionModel) override
Insert a new item after selected one.
- void [insertLeadingItemAfterSelected](#) (QItemSelectionModel *) override
- void [removeSelectedItem](#) (QItemSelectionModel *pSelectionModel) override
Remove an array under selection.
- void [removeSelectedItem](#) (QItemSelectionModel *) override

Private Member Functions

- void [updateContent](#) ()
Represent all items which a data object contains.
- void [clearContent](#) ()
Clear previously created items.

Private Attributes

- [Core::AbstractDataObject](#) * **mpDataObject** = nullptr

Additional Inherited Members

4.9.1 Detailed Description

Table model to represent either a scalar or vector data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[basetablemodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[basetablemodel.cpp](#)

4.10 QRS::Managers::ConstraintItemDelegate Class Reference

Class to specify how options of a constraint can be edited.

```
#include <constraintitemdelegate.h>
```

Inheritance diagram for QRS::Managers::ConstraintItemDelegate:

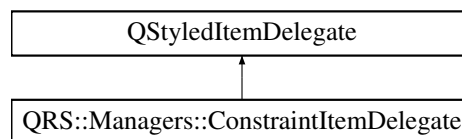

Signals

- void **typeCreated** (int iRow) const
- void **typeChanged** (int iRow, Core::ConstraintRodComponent::ConstraintType oldType) const
- void **coordinateSystemChanged** (int iRow) const

Public Member Functions

- **ConstraintItemDelegate** ([Core::ConstraintRodComponent](#) const &constraintRodComponent, ConstraintTypeNames const &types, ConstraintCoordinateSystemNames const &coordinateSystems, QObject *parent=nullptr)
- QWidget * **createEditor** (QWidget *pCell, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Create a comboBox to choose items.
- void **setEditorData** (QWidget *pEditor, const QModelIndex &index) const override
Specify data to show.
- void **setModelData** (QWidget *pEditor, QAbstractItemModel *pModel, const QModelIndex &index) const override
Set data to a model.
- void **updateEditorGeometry** (QWidget *pEditor, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Set a geometry to render.

Private Attributes

- [Core::ConstraintRodComponent](#) const & **mConstraintRodComponent**
- **ConstraintTypeNames** const & **mTypes**
- **ConstraintCoordinateSystemNames** const & **mCoordinateSystems**

4.10.1 Detailed Description

Class to specify how options of a constraint can be edited.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/constraintitemdelegate.cpp](#)

4.11 QRS::Core::ConstraintRodComponent Class Reference

Component to restrict movements of a rod.

```
#include <constraintrodcomponent.h>
```

Inheritance diagram for QRS::Core::ConstraintRodComponent:

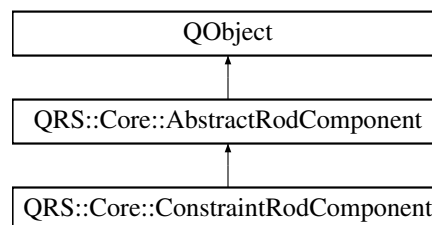

Public Types

- enum **ConstraintType** {
 kDisplacementX , **kDisplacementY** , **kDisplacementZ** , **kRotationX** ,
 kRotationY , **kRotationZ** }
- enum **ConstraintCoordinateSystem** { **kGlobal** , **kLocal** }
- using **Constraints** = std::map< ConstraintType, ConstraintCoordinateSystem >

Public Member Functions

- **ConstraintRodComponent** (QString const &name)
- [~ConstraintRodComponent](#) ()
Decrease a number of instances while being destroyed.
- [AbstractRodComponent](#) * [clone](#) () const override
Clone a constraint rod component.
- bool **isDataComplete** () const override
- void [serialize](#) (QDataStream &stream) const override
Serialize all properties of a constraint component.
- void [deserialize](#) (QDataStream &stream, DataObjects const &dataObjects) override
Deserialize a constraint component.
- void **resolveReferences** (DataObjects const &) override
- bool [isConstraintExist](#) (ConstraintType type) const
Check whether the constraint of the specified type exists.
- void [setConstraint](#) (ConstraintType type, ConstraintCoordinateSystem coordinateSystem)
Set a constraint.
- bool [removeConstraint](#) (ConstraintType type)
Remove the constraint of a given type.
- Constraints const & **constraints** () const

Static Public Member Functions

- static quint32 **numberInstances** ()

Private Attributes

- Constraints **mConstraints**

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.11.1 Detailed Description

Component to restrict movements of a rod.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[constraintrodcomponent.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[constraintrodcomponent.cpp](#)

4.12 QRS::Managers::ConstraintRodComponentWidget Class Reference

Widget to consturct constraints of a rod.

```
#include <constraintrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::ConstraintRodComponentWidget:

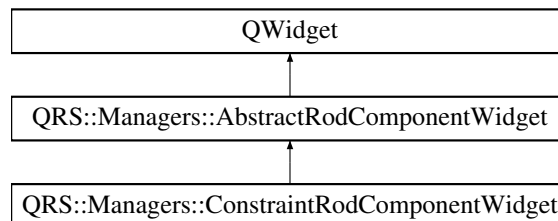

Public Member Functions

- **ConstraintRodComponentWidget** ([Core::ConstraintRodComponent](#) &constraintRodComponent, QWidget *parent=nullptr)

Private Slots

- void [setConstraintData](#) (int iRow)
Change a constraint property.

Private Member Functions

- void [createContent](#) ()
Create all the widgets.
- QToolBar * [createToolBar](#) ()
Create a toolbar to add and remove constraints.
- void [createTableWidget](#) ()
Create a table to construct constraints.
- void [addRow](#) ()
Add a row at the end of the table.
- void [removeSelectedRows](#) ()
Remove selected rows from the table.
- void [representConstraintData](#) ()
Represent existing constraints.
- void [setTableHeight](#) ()
Set the height of the table to be enough to represent all rows.
- void [specifyConstraintNames](#) ()
Specify names of constraints.
- QVariant [getItemData](#) (int iRow, int iColumn)
Retrieve item data.

Private Attributes

- [Core::ConstraintRodComponent](#) & **mConstraintRodComponent**
- QWidget * **mpTableConstraint**
- [ConstraintItemDelegate](#) * **mpItemDelegate**
- ConstraintTypeNames **mTypeNames**
- ConstraintCoordinateSystemNames **mCoordinateSystemNames**

Additional Inherited Members

4.12.1 Detailed Description

Widget to construrt constraints of a rod.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[constraintrodcomponentwidget.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[constraintrodcomponentwidget.cpp](#)

4.13 QRS::Managers::DataObjectLineEdit Class Reference

Line edit widget to hold a pointer to a data object.

```
#include <dataobjectlineedit.h>
```

Inheritance diagram for QRS::Managers::DataObjectLineEdit:

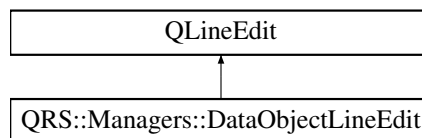

Signals

- void **selected** ([Core::AbstractDataObject](#) const *pDataObject)
- void **editRequested** (Core::DataIDType id)

Public Member Functions

- **DataObjectLineEdit** ([Core::AbstractDataObject](#) const *pDataObject, Core::AbstractDataObject::ObjectType type, QString const &mimeType, QWidget *parent=nullptr)

Private Slots

- void [showContextMenu](#) (const QPoint &point)
Show a menu to modify data.
- void [reset](#) ()
Erase the address of the data object.
- void [edit](#) ()
Try to edit a data object through managers.

Private Member Functions

- void [dragEnterEvent](#) (QDragEnterEvent *pEvent) override
Check if the type of the dropped item is correct.
- void [dropEvent](#) (QDropEvent *pEvent) override
Process dropping of the approved item.
- void [keyPressEvent](#) (QKeyEvent *pEvent) override
Erase the data object address.
- void [mouseDoubleClickEvent](#) (QMouseEvent *pEvent) override
Start the editing session when a double click event occurs.

Private Attributes

- [Core::AbstractDataObject](#) const * **mpDataObject**
- [Core::AbstractDataObject::ObjectType](#) **mType**
- QString const **mkMimeType**

4.13.1 Detailed Description

Line edit widget to hold a pointer to a data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[dataobjectlineedit.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[dataobjectlineedit.cpp](#)

4.14 QRS::HierarchyModels::DataObjectsHierarchyItem Class Reference

Item to represent a hierarchy of data objects.

```
#include <dataobjectshierarchyitem.h>
```

Inheritance diagram for QRS::HierarchyModels::DataObjectsHierarchyItem:

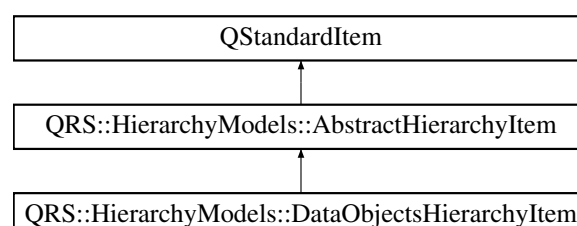

Public Member Functions

- [DataObjectsHierarchyItem](#) (Core::DataObjects &dataObjects, [Core::HierarchyTree](#) &hierarchyDataObjects, QString const &text="Root", QIcon const &icon=QIcon())
Create the representative of the structure of data objects.
- [DataObjectsHierarchyItem](#) (Core::HierarchyNode *pNode, [Core::AbstractDataObject](#) *pDataObject)
Construct an item to represent a data object.
- [DataObjectsHierarchyItem](#) (Core::HierarchyNode *pNode)
Construct an item to represent a directory.
- int **type** () const override
- [Core::AbstractDataObject](#) const * **getDataObject** () const

Private Member Functions

- void **appendItems** (Core::DataObjects &dataObjects, [Core::HierarchyNode](#) *pNode)
Create items based on the position in the tree structure.

Private Attributes

- [Core::AbstractDataObject](#) * **mpDataObject** = nullptr

Friends

- class **DataObjectsHierarchyModel**
- class **PropertiesModels::DataObjectsPropertiesModel**

Additional Inherited Members

4.14.1 Detailed Description

Item to represent a hierarchy of data objects.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[dataobjectshierarchyitem.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[dataobjectshierarchyitem.cpp](#)

4.15 QRS::HierarchyModels::DataObjectsHierarchyModel Class Reference

Tree model to represent and modify a hierarchy of data objects.

```
#include <dataobjectshierarchymodel.h>
```

Inheritance diagram for QRS::HierarchyModels::DataObjectsHierarchyModel:

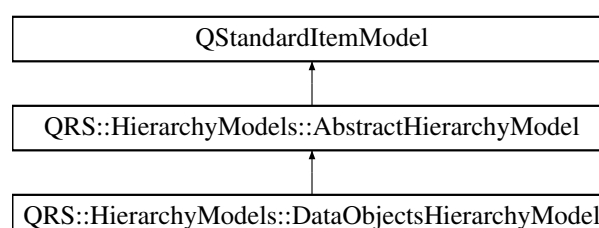

Public Slots

- void [retrieveSelectedItem](#) ()
Retrieve a selected data object.
- void [removeSelectedItems](#) ()
Remove data objects under selection.

Signals

- void **selected** (Core::DataIDType id)
- void **selectionCleared** ()

Public Member Functions

- **DataObjectsHierarchyModel** (Core::DataObjects &dataObjects, [Core::HierarchyTree](#) &hierarchyDataObjects, QString const &mimeType, QTreeView *pView=nullptr)
- void [updateContent](#) () override
Update all the content.
- void [clearContent](#) () override
Clear all the items.
- bool [isEmpty](#) () const
Check if there are data objects to represent.
- void [selectItem](#) (int iRow)
Select an item by row index.
- void [selectItemByID](#) (Core::DataIDType id)
Select an item by type and identifier.

Private Slots

- void [renameItem](#) (QStandardItem *pStandardItem)
Rename a data object after editing.

Private Member Functions

- [DataObjectsHierarchyItem](#) * [findItemByID](#) ([DataObjectsHierarchyItem](#) *pltem, Core::DataIDType const &id)
Find an item by identifier.
- void [selectItem](#) ([DataObjectsHierarchyItem](#) *pltem)
Select a specified item.

Private Attributes

- Core::DataObjects & **mDataObjects**
- [Core::HierarchyTree](#) & **mHierarchyDataObjects**

Additional Inherited Members

4.15.1 Detailed Description

Tree model to represent and modify a hierarchy of data objects.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.h>
- </home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchymodel.cpp>

4.16 QRS::Managers::DataObjectsManager Class Reference

Manager to create objects of different types: scalars, vectors, matroces and surfaces.

```
#include <dataobjectsmanager.h>
```

Inheritance diagram for QRS::Managers::DataObjectsManager:

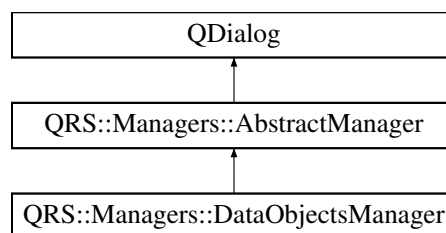

Public Slots

- void [apply](#) () override
Apply all the changes made by user.
- [Core::AbstractDataObject * addScalar](#) ()
Add a scalar object.
- [Core::AbstractDataObject * addVector](#) ()
Add a vector object.
- [Core::AbstractDataObject * addMatrix](#) ()
Add a matrix object.
- [Core::AbstractDataObject * addSurface](#) ()
Add a surface object.
- void [insertItemAfterSelected](#) ()
Insert a new array into the data object.
- void [insertLeadingItemAfterSelected](#) ()
Insert a new leading item into the data object.
- void [removeSelectedItem](#) ()
Remove a selected item.
- void [removeSelectedLeadingItem](#) ()
Remove a selected leading item.
- void [importDataObjects](#) ()
Import data objects from a file.

Signals

- void **applied** (Core::DataObjects const &dataObjects, [Core::HierarchyTree](#) const &hierarchyDataObjects)

Public Member Functions

- **DataObjectsManager** (Core::DataObjects &&dataObjects, [Core::HierarchyTree](#) &&hierarchyDataObjects, QString &lastPath, QSettings &settings, QWidget *parent=nullptr)
- void [selectDataObject](#) (int iRow)
Select a data object by row index.
- void [selectDataObjectByID](#) (Core::DataIDType id)
Select a data object by identifier.
- Core::DataObjects const & **getDataObjects** ()

Private Member Functions

- void [createContent](#) ()
Create all the widgets.
- ads::CDockWidget * [createDataTableWidget](#) ()
Create a tabbed widget to interact with data tables.
- ads::CDockWidget * [createHierarchyWidget](#) ()
Create an object to represent a hierarchy of data objects.
- QLayout * [createDialogControls](#) ()
Create dialog controls.
- void [emplaceDataObject](#) ([Core::AbstractDataObject](#) *pDataObject)
Helper function to insert data objects into the manager.
- bool [isDataTableModifiable](#) ()
Helper function to check if it is possible to interact with data object content.
- void [importDataObject](#) (QString const &path, QString const &fileName)
Import a data object from a file.
- void [representDataObject](#) (Core::DataIDType id)
Represent a selected data object according to its type.
- void [clearDataObjectRepresentation](#) ()
Clear a visual data of a data object.

Private Attributes

- QTreeView * **mpTreeDataObjects**
- QTreeView * **mpDataTable**
- Core::DataObjects **mDataObjects**
- [Core::HierarchyTree](#) **mHierarchyDataObjects**
- [TableModels::TableModelInterface](#) * **mpTableModelInterface** = nullptr
- [TableModels::BaseTableModel](#) * **mpBaseTableModel**
- [TableModels::MatrixTableModel](#) * **mpMatrixTableModel**
- [TableModels::SurfaceTableModel](#) * **mpSurfaceTableModel**
- [HierarchyModels::DataObjectsHierarchyModel](#) * **mpTreeDataObjectsModel**

Additional Inherited Members

4.16.1 Detailed Description

Manager to create objects of different types: scalars, vectors, matroces and surfaces.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.cpp](#)

4.17 QRS::PropertiesModels::DataObjectsPropertiesModel Class Reference

Model to represent properties of selected data objects.

```
#include <dataobjectspropertiesmodel.h>
```

Inheritance diagram for QRS::PropertiesModels::DataObjectsPropertiesModel:

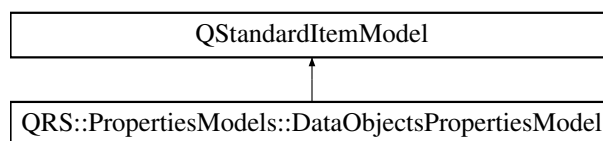

Public Types

- enum **PropertyType** {
kName , **kType** , **kNumberItems** , **kNumberEntities** ,
kID , **kNumberChildren** }

Signals

- void **propertyChanged** ()

Public Member Functions

- **DataObjectsPropertiesModel** (QTableView *pView, QVector< [HierarchyModels::AbstractHierarchyItem](#) * > items)

Private Slots

- void [modifyProperty](#) (QStandardItem *pChangedProperty)
Modify the selected property of all items.

Private Member Functions

- void [setDirectoryAttributes](#) ()
Set directory characteristic attributes.
- void [setObjectAttributes](#) ()
Set objects characteristic attributes.
- QList< QStandardItem * > [preparePropertyRow](#) (PropertyType type, QString const &title, QVariant const &value, bool isValueEditable) const
Prepare a row to insert into the table.

Private Attributes

- QVector< [HierarchyModels::DataObjectsHierarchyItem](#) * > **mItems**

4.17.1 Detailed Description

Model to represent properties of selected data objects.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/models/properties/dataobjectspropertiesmodel.cpp](#)

4.18 QRS::Managers::DoubleSpinBoxItemDelegate Class Reference

Class to specify how table values can be edited.

```
#include <doublespinboxitemdelegate.h>
```

Inheritance diagram for QRS::Managers::DoubleSpinBoxItemDelegate:

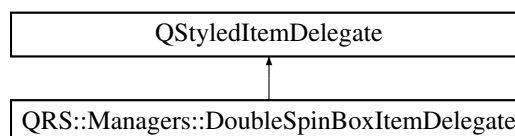

Public Member Functions

- **DoubleSpinBoxItemDelegate** (QObject *parent=nullptr)
- QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Create a double value editor.
- void [setEditorData](#) (QWidget *pEditor, const QModelIndex &index) const override
Specify data to show.
- void [setModelData](#) (QWidget *pEditor, QAbstractItemModel *pModel, const QModelIndex &index) const override
Set data to a model.
- void [updateEditorGeometry](#) (QWidget *pEditor, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Set a geometry to render.

4.18.1 Detailed Description

Class to specify how table values can be edited.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[doublespinboxitemdelegate.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[doublespinboxitemdelegate.cpp](#)

4.19 QRS::Core::GeometryRodComponent Class Reference

Geometrical configuration of a rod.

```
#include <geometryrodcomponent.h>
```

Inheritance diagram for QRS::Core::GeometryRodComponent:

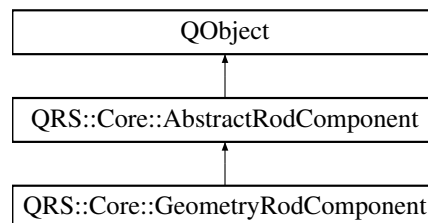

Public Member Functions

- **GeometryRodComponent** (QString const &name)
- [~GeometryRodComponent](#) ()
Decrease a number of instances while being destroyed.
- [AbstractRodComponent * clone](#) () const override
Clone a geometrical rod component.
- bool [isDataComplete](#) () const override
Check whether the component data is complete.
- void [serialize](#) (QDataStream &stream) const override
Serialize all properties of a geometrical component.
- void [deserialize](#) (QDataStream &stream, DataObjects const &dataObjects) override
Deserialize a geometrical component.
- void [resolveReferences](#) (DataObjects const &dataObjects) override
Resolve references of a geometrical rod component.
- [VectorDataObject](#) const * **radiusVector** () const
- [MatrixDataObject](#) const * **rotationMatrix** () const
- void **setRadiusVector** ([VectorDataObject](#) const *pRadiusVector)
- void **setRotationMatrix** ([MatrixDataObject](#) const *pRotationMatrix)

Static Public Member Functions

- static quint32 **numberInstances** ()

Private Attributes

- `QPointer< VectorDataObject const > mpRadiusVector`
- `QPointer< MatrixDataObject const > mpRotationMatrix`

Static Private Attributes

- static quint32 `smNumInstances` = 0

Additional Inherited Members

4.19.1 Detailed Description

Geometrical configuration of a rod.

The documentation for this class was generated from the following files:


- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.h`
- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/geometryrodcomponent.cpp`

4.20 QRS::Managers::GeometryRodComponentWidget Class Reference

Widget to construct a geometrical rod component.

```
#include <geometryrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::GeometryRodComponentWidget:

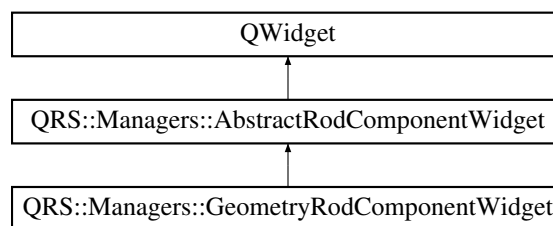

Public Member Functions

- **GeometryRodComponentWidget** ([Core::GeometryRodComponent](#) &geometryRodComponent, `QString` const &mimeType, `QWidget` *parent=nullptr)

Private Slots

- void `setRadiusVector` ([Core::AbstractDataObject](#) const *pDataObject)
Set a radius vector.
- void `setRotationMatrix` ([Core::AbstractDataObject](#) const *pDataObject)
Set a rotation matrix.

Private Member Functions

- void [createContent](#) ()
Create all the widgets.

Private Attributes

- [Core::GeometryRodComponent](#) & [mGeometryRodComponent](#)

Additional Inherited Members

4.20.1 Detailed Description

Widget to construct a geometrical rod component.

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.cpp](#)

4.21 QRS::Core::HierarchyNode Class Reference

Hierarchy representative.

```
#include <hierarchynode.h>
```

Public Types

- enum **NodeType** { **kObject** , **kDirectory** }

Public Member Functions

- [HierarchyNode](#) (NodeType type, QVariant value)
Node constructor.
- void [appendChild](#) ([HierarchyNode](#) *node)
Add a child node.
- bool **hasParent** () const
- bool **hasChild** () const
- bool **hasNextSibling** () const
- [HierarchyNode](#) * **parent** ()
- [HierarchyNode](#) * **firstChild** ()
- [HierarchyNode](#) * **nextSibling** ()
- NodeType **type** () const
- QVariant & **value** ()
- [HierarchyNode](#) * [groupNodes](#) ([HierarchyNode](#) *pChildNode)
Merge two nodes into one entity.
- bool [setBefore](#) ([HierarchyNode](#) *pSetNode)
Set a given node before the current one.
- bool [setAfter](#) ([HierarchyNode](#) *pSetNode)
Set a given node after the current one.
- quint32 [numberChildren](#) () const
Retrieve a number of children of the current node.

Private Member Functions

- void `excludeNodeFromHierarchy` ()
Remove all links to the node.
- bool `isSetAllowed` (`HierarchyNode` const *pNode) const
Check whether it is possible to place a given item before or after the current one.
- bool `isParentOf` (`HierarchyNode` const *pNode) const
Check whether the current item contains a given node as a child.
- quint32 `countNodes` (`HierarchyNode` *pNode, quint32 &numNodes) const
Count all children and siblings of a given node.

Private Attributes

- `HierarchyNode` * `mpParent` = nullptr
- `HierarchyNode` * `mpFirstChild` = nullptr
- `HierarchyNode` * `mpNextSibling` = nullptr
- `HierarchyNode` * `mpPreviousSibling` = nullptr
- NodeType `mType`
- QVariant `mValue`

Friends

- class `HierarchyTree`

4.21.1 Detailed Description

Hierarchy representative.

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.cpp](#)

4.22 QRS::Core::HierarchyTree Class Reference

Hierarchy of data objects (n-array tree)

```
#include <hierarchytree.h>
```

Public Member Functions

- [HierarchyTree](#) ()
Base tree constructor.
- [HierarchyTree](#) ([HierarchyTree](#) &another)
Copy constructor.
- [HierarchyTree](#) ([HierarchyTree](#) &&another)
Move constructor.
- [HierarchyTree](#) ([HierarchyNode](#) *pRootNode)
Take the user defined node as the root.
- [HierarchyTree](#) (QDataStream &stream, int numNodes)
Read a tree from a stream.
- [HierarchyTree](#) & [operator=](#) ([HierarchyTree](#) const &another)
Copy assignment operator.
- [HierarchyTree](#) & [operator=](#) ([HierarchyTree](#) &&another)
Move assignment operator.
- [~HierarchyTree](#) ()
Tree destructor.
- void [clear](#) ()
Delete all nodes except the root node.
- void [appendNode](#) ([HierarchyNode](#) *pNode)
Append a node to the root node.
- bool [removeNode](#) ([HierarchyNode::NodeType](#) type, QVariant const &value)
Remove a node by type and value.
- void [removeNode](#) ([HierarchyNode](#) *pNode)
Remove a node and all its subnodes.
- void [changeNodeValue](#) ([HierarchyNode::NodeType](#) type, QVariant const &oldValue, QVariant const &newValue)
Change the value of a node.
- [HierarchyNode](#) * [root](#) ()
- [HierarchyTree](#) [clone](#) () const
Clone a tree.
- [HierarchyNode](#) * [findNode](#) ([HierarchyNode](#) *pBaseNode, [HierarchyNode::NodeType](#) type, QVariant const &value) const
Find a node by type and value.
- quint32 [size](#) () const
Get a number of nodes.

Private Member Functions

- [HierarchyNode](#) * [copyNode](#) ([HierarchyNode](#) *pBaseNode, quint32 relativeLevel) const
Copy a node.
- void [removeNodeSiblings](#) ([HierarchyNode](#) *pNode)
Remove all subnodes.
- void [printNode](#) (quint32 level, [HierarchyNode](#) *pNode, QDebug stream) const
Print a current node and all its subnodes.
- void [writeNode](#) ([HierarchyNode](#) *pNode, QDataStream &stream) const
Print a current node and all its subnodes.

Private Attributes

- `HierarchyNode * mpRootNode = nullptr`

Friends

- `QDebug operator<< (QDebug stream, HierarchyTree &tree)`
Print a tree structure.
- `QDataStream & operator<< (QDataStream &stream, HierarchyTree const &tree)`
Write a tree structure to a stream.

4.22.1 Detailed Description

Hierarchy of data objects (n-array tree)

The documentation for this class was generated from the following files:


- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.h`
- `/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchytree.cpp`

4.23 QRS::Core::LoadRodComponent Class Reference

Load applied to a rod.

```
#include <loadrodcomponent.h>
```

Inheritance diagram for QRS::Core::LoadRodComponent:

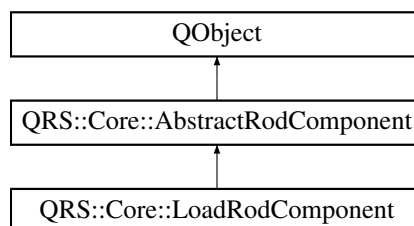

Public Types

- `enum LoadType {`
`kNone , kForcedDisplacements , kForcedRotations , kPointForce ,`
`kPointMoment , kPointMass , kPointInertiaMoment , kPointLinearDamper ,`
`kPointRotationalDamper , kDistributedForce , kDistributedMoment , kAerodynamicFlow ,`
`kAcceleration , kInnerLiquidFlow , kDisplacementDamping , kRotationDamping }`

Public Member Functions

- **LoadRodComponent** (QString const &name)
- **~LoadRodComponent** ()
Decrease a number of instances while being destroyed.
- **AbstractRodComponent * clone** () const override
Clone a rod load.
- **bool isDataComplete** () const override
Check whether the component data is complete.
- **void serialize** (QDataStream &stream) const override
Serialize all properties of a rod load.
- **void deserialize** (QDataStream &stream, DataObjects const &dataObjects) override
Deserialize a rod load.
- **void resolveReferences** (DataObjects const &dataObjects) override
Resolve references of a rod load.
- **LoadType loadType** () const
- **VectorDataObject const * directionVector** () const
- **ScalarDataObject const * longitudinalFunction** () const
- **ScalarDataObject const * timeCoefficient** () const
- **VectorDataObject const * timeRotationVector** () const
- **DataValueType multiplier** () const
- **bool isFollowing** () const
- **void setType** (LoadType type)
- **void setDirectionVector** (VectorDataObject const *pDirectionVector)
- **void setLongitudinalFunction** (ScalarDataObject const *pLongitudinalFunction)
- **void setTimeCoefficient** (ScalarDataObject const *pTimeCoefficient)
- **void setTimeRotationVector** (VectorDataObject const *pTimeRotationVector)
- **void setMultiplier** (DataValueType value)
- **void setFollowingState** (bool isFollowing)

Static Public Member Functions

- **static quint32 numberInstances** ()

Private Attributes

- **LoadType mLoadType** = kNone
- **QPointer< VectorDataObject const > mpDirectionVector**
- **QPointer< ScalarDataObject const > mpLongitudinalFunction**
- **QPointer< ScalarDataObject const > mpTimeCoefficient**
- **QPointer< VectorDataObject const > mpTimeRotationVector**
- **DataValueType mMultiplier** = 1.0
- **bool mIsFollowing** = false

Static Private Attributes

- **static quint32 smNumInstances** = 0

Additional Inherited Members

4.23.1 Detailed Description

Load applied to a rod.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/loadrodcomponent.cpp](#)

4.24 QRS::Managers::LoadRodComponentWidget Class Reference

Widget to construct a load applied to a rod.

```
#include <loadrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::LoadRodComponentWidget:

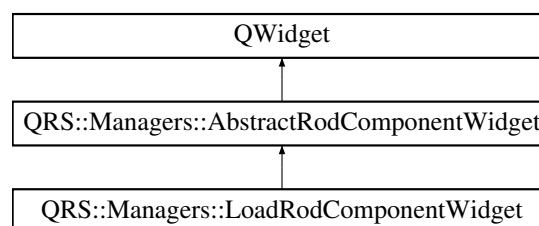

Public Member Functions

- **LoadRodComponentWidget** ([Core::LoadRodComponent](#) &loadRodComponent, QString const &mime←Type, QWidget *parent=nullptr)

Private Member Functions

- void [createContent](#) ()
Create all the widgets.
- QLayout * [createBaseLayout](#) ()
Create a layout consisted of widgets to set loading parameters.
- QWidget * [createTimeGroup](#) ()
Create a group of widgets which depend on time.
- QLayout * [createLoadTypeLayout](#) ()
Create a layout consisted of widgets to set a load type and following state.
- QComboBox * [createLoadTypeComboBox](#) ()
Create a combobox to specify a type of load.
- template<typename T >
void [setProperty](#) ([Core::AbstractDataObject](#) const *pDataObject, auto setFun)
Set a property of a rod load.
- void [setLoadUnits](#) ([Core::LoadRodComponent::LoadType](#) type)
Set load units to show.

Private Attributes

- [Core::LoadRodComponent](#) & `mLoadRodComponent`
- `QLabel * mpLoadRodUnits`

Additional Inherited Members

4.24.1 Detailed Description

Widget to construct a load applied to a rod.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.h>
- </home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.cpp>

4.25 QRS::App::LogWidget Class Reference

Log all the messages sent.

```
#include <logwidget.h>
```

Inheritance diagram for QRS::App::LogWidget:

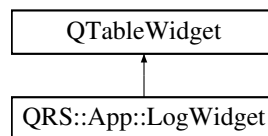

Public Member Functions

- **LogWidget** (`QWidget *parent=nullptr`)
- void [log](#) (`QtMsgType messageType, const QString &message`)
Represent a message sent.

4.25.1 Detailed Description

Log all the messages sent.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/QRodSystems/src/central/logwidget.h>
- </home/qinterfly/Library/Projects/Current/QRodSystems/src/central/logwidget.cpp>

4.26 QRS::App::MainWindow Class Reference

The main window of the program.

```
#include <mainwindow.h>
```

Inheritance diagram for QRS::App::MainWindow:

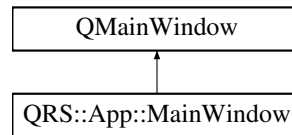

Public Member Functions

- **MainWindow** (QWidget *parent=nullptr)
- void [openProject](#) (QString const &filePath)
Open the specific project.
- bool [saveProject](#) ()
Save the current project.

Static Public Attributes

- static [LogWidget](#) * **pLogger** = nullptr

Private Slots

- void [createProject](#) ()
Create a project and substitute the current one with it.
- void [openProjectDialog](#) ()
Open a project by using a dialog.
- void [openRecentProject](#) ()
Open the project which was selected from the Recent Projects menu.
- bool [saveAsProject](#) ()
Save the current project under a new name.
- void [setModified](#) (bool flag)
Whenever a project has been modified.
- void [representHierarchyProperties](#) (QVector< [HierarchyModels::AbstractHierarchyItem](#) * > items)
Show information about the selected project items.
- void [saveSettings](#) ()
Save the current window settings.
- void [restoreSettings](#) ()
Restore window settings from a file.
- void [createDataObjectsManager](#) ()
Show a manager for designing data objects.
- void [createRodComponentsManager](#) ()
Show a manager to set rod components based on the created data objects.
- void [createRodConstructorManager](#) ()
Show a manager to assemble a rod by using rod components.
- void [aboutProgram](#) ()
Show information about a program.

Private Member Functions

- void [initializeWindow](#) ()
Set a state and geometry of [MainWindow](#).
- void [createContent](#) ()
Create all the widgets and corresponding actions.
- void [closeEvent](#) (QCloseEvent *pEvent) override
Save project and settings before exit.
- ads::CDockWidget * [createProjectHierarchyWidget](#) ()
Create a widget to represent a project hierarchy.
- ads::CDockWidget * [createGLWidget](#) ()
Create an OpenGL widget to render rods.
- ads::CDockWidget * [createCodeWidget](#) ()
Create a widget enables to code.
- ads::CDockWidget * [createLogWidget](#) ()
Create a window for logging.
- ads::CDockWidget * [createPropertiesWidget](#) ()
Create a window to modify properies of selected obercts.
- void [setProjectTitle](#) ()
Show information a name of a project.
- void [retrieveRecentProjects](#) ()
Retrieve recent projects from the settings file.
- void [addToRecentProjects](#) ()
Add the current project to the recent ones.
- void [specifyMenuConnections](#) ()
Set signals and slots for menu actions.
- void [specifyProjectConnections](#) ()
Set signals and slots for a project.
- bool [saveProjectChangesDialog](#) ()
Save project changes.
- bool [saveProjectHelper](#) (QString const &filePath)
Helper method to perform saving of the current project.

Private Attributes

- Ui::MainWindow * **mpUi**
- ads::CDockManager * **mpDockManager**
- QLabel * **mpStatusLabel**
- QTableView * **mpPropertiesWidget**
- [HierarchyModels::ProjectHierarchyModel](#) * **mpProjectHierarchyModel** = nullptr
- [Managers::ManagersFactory](#) * **mpManagersFactory** = nullptr
- [Core::Project](#) * **mpProject**
- QSharedPointer< QSettings > **mpSettings**
- QString **mLastPath**
- QList< QString > **mPathRecentProjects**

4.26.1 Detailed Description

The main window of the program.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/[mainwindow.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/[mainwindow.cpp](#)

4.27 QRS::Managers::ManagersFactory Class Reference

Factory to create managers which utilize and modify project data.

```
#include <managersfactory.h>
```

Inheritance diagram for QRS::Managers::ManagersFactory:

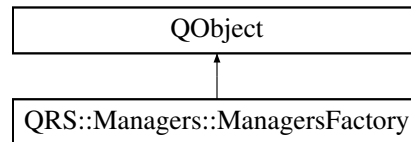

Public Member Functions

- **ManagersFactory** ([Core::Project](#) &project, QString &lastPath, QSettings &settings, QWidget *parent)
- bool [createManager](#) (AbstractManager::ManagerType type)
Create a manager according to a given type.
- bool [deleteManager](#) (AbstractManager::ManagerType type)
Destroy a manager by given type.
- [AbstractManager](#) * [manager](#) (AbstractManager::ManagerType type)
Retrieve a manager of a given type.

Private Member Functions

- void [specifyConnections](#) ([DataObjectsManager](#) *pManager)
Specify connections of the manager of data objects.
- void [specifyConnections](#) ([RodComponentsManager](#) *pManager)
Specify connections of the manager of rod components.

Private Attributes

- [Core::Project](#) & **mProject**
- QString & **mLastPath**
- QSettings & **mSettings**
- QWidget * **mpParent**
- std::unordered_map< AbstractManager::ManagerType, [AbstractManager](#) * > **mManagers**

4.27.1 Detailed Description

Factory to create managers which utilize and modify project data.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[managersfactory.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[managersfactory.cpp](#)

4.28 QRS::App::ManagersTab Class Reference

A toolbar consisted of object designers.

```
#include <controltabs.h>
```

Inheritance diagram for QRS::App::ManagersTab:

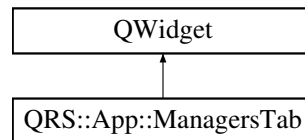

Signals

- void **actionDataObjectsTriggered** ()
- void **actionRodPropertiesTriggered** ()
- void **actionRodConstructorTriggered** ()

Public Member Functions

- [ManagersTab](#) (QWidget *parent=nullptr)
Managers tab constructor.

4.28.1 Detailed Description

A toolbar consisted of object designers.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/[controltabs.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/[controltabs.cpp](#)

4.29 QRS::Core::MaterialRodComponent Class Reference

Material properties of a rod.

```
#include <materialrodcomponent.h>
```

Inheritance diagram for QRS::Core::MaterialRodComponent:

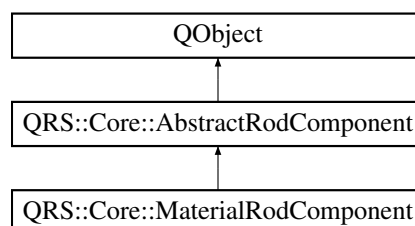

Public Member Functions

- **MaterialRodComponent** (QString const &name)
- [~MaterialRodComponent](#) ()
Decrease a number of instances while being destroyed.
- [AbstractRodComponent](#) * **clone** () const override
Clone a material rod component.
- bool **isDataComplete** () const override
Check whether the component data is complete.
- void **serialize** (QDataStream &stream) const override
Serialize all properties of a material component.
- void **deserialize** (QDataStream &stream, DataObjects const &dataObjects) override
Deserialize a material component.
- void **resolveReferences** (DataObjects const &dataObjects) override
Resolve references of a material rod component.
- [ScalarDataObject](#) const * **elasticModulus** () const
- [ScalarDataObject](#) const * **shearModulus** () const
- [ScalarDataObject](#) const * **poissonsRatio** () const
- [ScalarDataObject](#) const * **density** () const
- void **setElasticModulus** ([ScalarDataObject](#) const *pElasticModulus)
- void **setShearModulus** ([ScalarDataObject](#) const *pShearModulus)
- void **setPoissonsRatio** ([ScalarDataObject](#) const *pPoissonsRatio)
- void **setDensity** ([ScalarDataObject](#) const *pDensity)

Static Public Member Functions

- static quint32 **numberInstances** ()

Private Attributes

- QPointer< [ScalarDataObject](#) const > **mpElasticModulus**
- QPointer< [ScalarDataObject](#) const > **mpShearModulus**
- QPointer< [ScalarDataObject](#) const > **mpPoissonsRatio**
- QPointer< [ScalarDataObject](#) const > **mpDensity**

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.29.1 Detailed Description

Material properties of a rod.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[materialrodcomponent.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[materialrodcomponent.cpp](#)

4.30 QRS::Managers::MaterialRodComponentWidget Class Reference

Widget to construct a material rod component.

```
#include <materialrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::MaterialRodComponentWidget:

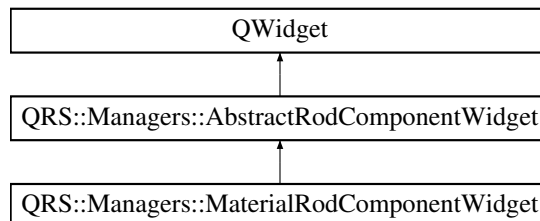

Public Member Functions

- **MaterialRodComponentWidget** ([Core::MaterialRodComponent](#) &materialRodComponent, QString const &mimeType, QWidget *parent=nullptr)

Private Member Functions

- void [createContent](#) ()
Create all the widgets.
- QWidget * [createModuliGroup](#) ()
Create a group consisted of widgets to set physical moduli.
- QLayout * [createBaseLayout](#) ()
Create a layout consisted of widgets to set density and Poisson's ratio.
- void [setProperty](#) ([Core::AbstractDataObject](#) const *pDataObject, auto setFun)
Set a material property which takes a scalar data object.

Private Attributes

- [Core::MaterialRodComponent](#) & **mMaterialRodComponent**

Additional Inherited Members

4.30.1 Detailed Description

Widget to construct a material rod component.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[materialrodcomponentwidget.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[materialrodcomponentwidget.cpp](#)

4.31 QRS::Core::MatrixDataObject Class Reference

Matrix data object.

```
#include <matrixdataobject.h>
```

Inheritance diagram for QRS::Core::MatrixDataObject:

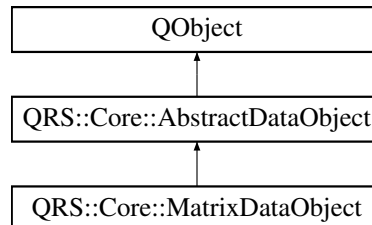

Public Member Functions

- [MatrixDataObject](#) (QString const &name)
Construct a matrix data object.
- [~MatrixDataObject](#) ()
Decrease a number of instances while being destroyed.
- [AbstractDataObject * clone](#) () const override
Clone a matrix data object.
- [DataItem](#) & [addItem](#) (DataValueType key) override
Insert a new item into [MatrixDataObject](#).
- virtual void [import](#) (QTextStream &stream) override
Import a matrix data object from a file.

Static Public Member Functions

- static quint32 [numberInstances](#) ()

Static Private Attributes

- static quint32 [smNumInstances](#) = 0

Additional Inherited Members

4.31.1 Detailed Description

Matrix data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[matrixdataobject.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[matrixdataobject.cpp](#)

4.32 QRS::TableModels::MatrixTableModel Class Reference

Table model to represent a matrix data object.

```
#include <matrixtablemodel.h>
```

Inheritance diagram for QRS::TableModels::MatrixTableModel:

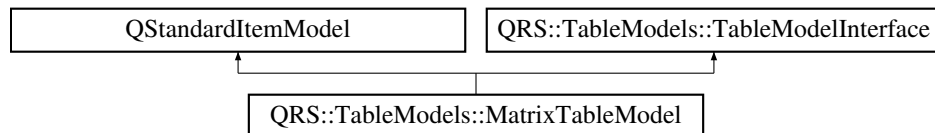

Public Member Functions

- **MatrixTableModel** (QWidget *parent=nullptr)
- void **setDataObject** ([Core::AbstractDataObject](#) *pDataObject)
Set a data object to represent.
- bool **setData** (const QModelIndex &indexEdit, const QVariant &value, int role=Qt::EditRole) override
Set the data acquired from a delegate.
- void **insertItemAfterSelected** (QItemSelectionModel *pSelectionModel) override
Insert a new item after selected one.
- void **insertLeadingItemAfterSelected** (QItemSelectionModel *) override
- void **removeSelectedItem** (QItemSelectionModel *pSelectionModel) override
Remove an array under selection.
- void **removeSelectedLeadingItem** (QItemSelectionModel *) override

Private Member Functions

- void **updateContent** ()
Represent all items which a vector data object contains.
- void **clearContent** ()
Clear previously created items.

Private Attributes

- [Core::AbstractDataObject](#) * **mpDataObject** = nullptr

Additional Inherited Members

4.32.1 Detailed Description

Table model to represent a matrix data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[matrixtablemodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[matrixtablemodel.cpp](#)

4.33 QRS::Core::MechanicalRodComponent Class Reference

Stiffness and mass distributions of a rod.

```
#include <mechanicalrodcomponent.h>
```

Inheritance diagram for QRS::Core::MechanicalRodComponent:

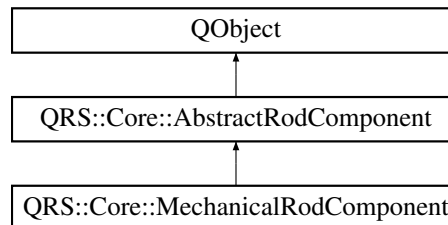

Public Member Functions

- **MechanicalRodComponent** (QString const &name)
- [~MechanicalRodComponent](#) ()
Decrease a number of instances while being destroyed.
- [AbstractRodComponent * clone](#) () const override
Clone a geometrical rod component.
- bool **isDataComplete** () const override
- void [serialize](#) (QDataStream &stream) const override
Serialize all properties of a geometrical component.
- void [deserialize](#) (QDataStream &stream, DataObjects const &dataObjects) override
Deserialize a geometrical component.
- void [resolveReferences](#) (DataObjects const &dataObjects) override
Resolve references of a geometrical rod component.
- [ScalarDataObject](#) const * **tensionStiffness** () const
- [ScalarDataObject](#) const * **torsionalStiffness** () const
- [ScalarDataObject](#) const * **bendingStiffnessX** () const
- [ScalarDataObject](#) const * **bendingStiffnessY** () const
- [ScalarDataObject](#) const * **linearMassDensity** () const
- [ScalarDataObject](#) const * **inertiaMassMomentX** () const
- [ScalarDataObject](#) const * **inertiaMassMomentY** () const
- [ScalarDataObject](#) const * **inertiaMassMomentZ** () const
- [ScalarDataObject](#) const * **eccentricityX** () const
- [ScalarDataObject](#) const * **eccentricityY** () const
- [ScalarDataObject](#) const * **contactDiameter** () const
- void **setTensionStiffness** ([ScalarDataObject](#) const *pTensionStiffness)
- void **setTorsionalStiffness** ([ScalarDataObject](#) const *pTorsionalStiffness)
- void **setBendingStiffnessX** ([ScalarDataObject](#) const *pBendingStiffnessX)
- void **setBendingStiffnessY** ([ScalarDataObject](#) const *pBendingStiffnessY)
- void **setLinearMassDensity** ([ScalarDataObject](#) const *pLinearMassDensity)
- void **setInertiaMassMomentX** ([ScalarDataObject](#) const *pInertiaMassMomentX)
- void **setInertiaMassMomentY** ([ScalarDataObject](#) const *pInertiaMassMomentY)
- void **setInertiaMassMomentZ** ([ScalarDataObject](#) const *pInertiaMassMomentZ)
- void **setEccentricityX** ([ScalarDataObject](#) const *pEccentricityX)
- void **setEccentricityY** ([ScalarDataObject](#) const *pEccentricityY)
- void **setContactDiameter** ([ScalarDataObject](#) const *pContactDiameter)

Static Public Member Functions

- static quint32 **numberInstances** ()

Private Attributes

- QPointer< [ScalarDataObject](#) const > **mpTensionStiffness**
- QPointer< [ScalarDataObject](#) const > **mpTorsionalStiffness**
- QPointer< [ScalarDataObject](#) const > **mpBendingStiffnessX**
- QPointer< [ScalarDataObject](#) const > **mpBendingStiffnessY**
- QPointer< [ScalarDataObject](#) const > **mpLinearMassDensity**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMassMomentX**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMassMomentY**
- QPointer< [ScalarDataObject](#) const > **mpInertiaMassMomentZ**
- QPointer< [ScalarDataObject](#) const > **mpEccentricityX**
- QPointer< [ScalarDataObject](#) const > **mpEccentricityY**
- QPointer< [ScalarDataObject](#) const > **mpContactDiameter**

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.33.1 Detailed Description

Stiffness and mass distributions of a rod.

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/mechanicalrodcomponent.h](#)
- [/home/qinterfly/Library/Projects/Current/QRodSystems/src/core/mechanicalrodcomponent.cpp](#)

4.34 QRS::Managers::MechanicalRodComponentWidget Class Reference

Widget to construct mechanical rod components consisted of stiffness and mass distributions.

```
#include <mechanicalrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::MechanicalRodComponentWidget:

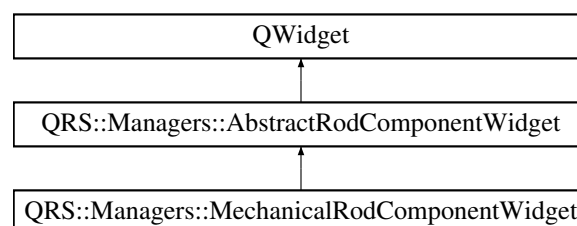

Public Member Functions

- **MechanicalRodComponentWidget** ([Core::MechanicalRodComponent](#) &mechanicalRodComponent, QString const &mimeType, QWidget *parent=nullptr)

Private Member Functions

- void [createContent](#) ()
Create all the widgets.
- QWidget * [createStiffnessGroup](#) ()
Create a group consisted of widgets to set stiffness distributions.
- QWidget * [createMassGroup](#) ()
Create a group consisted of widgets to set mass distributions.
- QWidget * [createEccentricityGroup](#) ()
Create a group consisted of widgets to set eccentricity distributions.
- QLayout * [createContactDiameterLayout](#) ()
Create a layout to set a contact diameter.
- void [setProperty](#) ([Core::AbstractDataObject](#) const *pDataObject, auto setFun)
Set a mechanical property which takes a scalar data object.

Private Attributes

- [Core::MechanicalRodComponent](#) & **mMechanicalRodComponent**

Additional Inherited Members

4.34.1 Detailed Description

Widget to construct mechanical rod components consisted of stiffness and mass distributions.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[mechanicalrodcomponentwidget.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[mechanicalrodcomponentwidget.cpp](#)

4.35 QRS::Core::Project Class Reference

[Project](#) class to interact with a created system of rods.

```
#include <project.h>
```

Inheritance diagram for QRS::Core::Project:



Public Slots

- bool [save](#) (QString const &dir, QString const &fileName)
Save a project to a file.
- void [setDataObjects](#) (QRS::Core::DataObjects const &dataObjects, [QRS::Core::HierarchyTree](#) const &hierarchyDataObjects)
Substitute current data objects with new ones.
- void [setRodComponents](#) (QRS::Core::RodComponents const &rodComponents, [QRS::Core::HierarchyTree](#) const &hierarchyRodComponents)
Substitute current rod components with new ones.

Signals

- void **dataObjectsSubstituted** ()
- void **propertiesDataObjectsChanged** ()
- void **rodComponentsSubstituted** ()
- void **propertiesRodComponentsChanged** ()
- void **projectHierarchyChanged** ()

Public Member Functions

- [Project](#) (QString const &name)
Construct a clean project with the user specified name.
- [Project](#) (QString const &path, QString const &fileName)
Read a project from a file.
- DataIDType **numberDataObjects** () const
- [AbstractDataObject](#) * [addDataObject](#) (AbstractDataObject::ObjectType type)
Create a data object with the specified type.
- DataObjects [cloneDataObjects](#) () const
Clone data objects.
- [HierarchyTree](#) **cloneHierarchyDataObjects** () const
- DataIDType **numberRodComponents** () const
- [AbstractRodComponent](#) * [addGeometry](#) ()
Create a geometrical rod component.
- [AbstractRodComponent](#) * [addCrossSection](#) (AbstractSectionRodComponent::SectionType sectionType)
Create a cross section.
- [AbstractRodComponent](#) * [addMaterial](#) ()
Add a material rod component.
- [AbstractRodComponent](#) * [addLoad](#) ()
Add a rod load.
- [AbstractRodComponent](#) * [addConstraint](#) ()
Add a rod constraint.
- [AbstractRodComponent](#) * [addMechanical](#) ()
Add a mechanical rod component.
- RodComponents [cloneRodComponents](#) () const
Clone rod components.
- [HierarchyTree](#) **cloneHierarchyRodComponents** () const
- QString const & **name** () const
- QString const & **filePath** () const
- void [importDataObjects](#) (QString const &path, QString const &fileName)
Import several data objects from a file.

Static Public Member Functions

- static QString const & **getFileExtension** ()

Private Member Functions

- void **emplaceRodComponent** ([AbstractRodComponent](#) *pRodComponent)
Emplace a rod component into a project.

Private Attributes

- quint32 **mID**
Unique project identifier.
- QString **mName**
Project name.
- QString **mFilePath**
Path to a file where a project is stored.
- DataObjects **mDataObjects**
Data objects.
- [HierarchyTree](#) **mHierarchyDataObjects**
Hierarchy of data objects.
- RodComponents **mRodComponents**
Rod components.
- [HierarchyTree](#) **mHierarchyRodComponents**
Hierarchy of rod components.

Static Private Attributes

- static const QString **skProjectExtension** = ".qrs"
File extensionn.

Friends

- class **QRS::HierarchyModels::ProjectHierarchyModel**
- class **QRS::Managers::ManagersFactory**

4.35.1 Detailed Description

[Project](#) class to interact with a created system of rods.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[project.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[project-base.cpp](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[project-io.cpp](#)

4.36 QRS::HierarchyModels::ProjectHierarchyModel Class Reference

Project hierarchy representative.

```
#include <projecthierarchymodel.h>
```

Inheritance diagram for QRS::HierarchyModels::ProjectHierarchyModel:

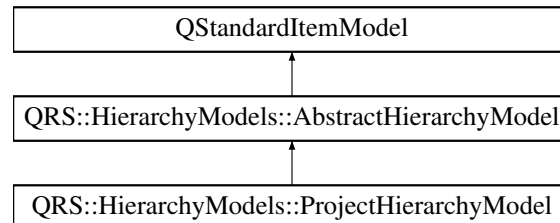

Public Slots

- void [validateItemSelection](#) ()
Check if an item selection is correct and if it is not – correct it.

Signals

- void **selectionValidated** (QVector< [QRS::HierarchyModels::AbstractHierarchyItem](#) * > validatedItems)

Public Member Functions

- **ProjectHierarchyModel** (QString const &mimeType, QTreeView *pView=nullptr)
- void [updateContent](#) () override
Update all the content.
- void [clearContent](#) () override
Clear all the items.
- void [setProject](#) ([Core::Project](#) *pProject)
Set a project to represent.

Private Member Functions

- [DataObjectsHierarchyItem](#) * [retrieveDataObjectsItem](#) ()
Retrieve a representative of data objects.
- [RodComponentsHierarchyItem](#) * [retrieveRodComponentsItem](#) ()
Retrieve a representative of rod components.

Private Attributes

- [Core::Project](#) * **mpProject** = nullptr

Additional Inherited Members

4.36.1 Detailed Description

Project hierarchy representative.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[projecthierarchymodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[projecthierarchymodel.cpp](#)

4.37 QRS::HierarchyModels::RodComponentsHierarchyItem Class Reference

Item to represent a hierarchy of rod components.

```
#include <rodcomponentshierarchyitem.h>
```

Inheritance diagram for QRS::HierarchyModels::RodComponentsHierarchyItem:

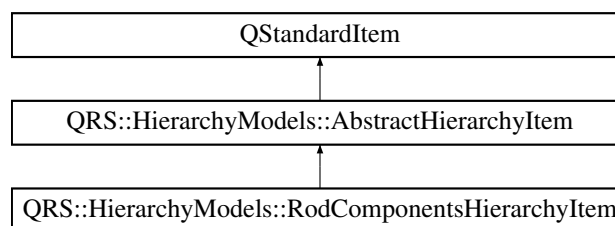

Public Member Functions

- [RodComponentsHierarchyItem](#) (Core::RodComponents &rodComponents, [Core::HierarchyTree](#) &hierarchy↔ RodComponents, QString const &text="Root", QIcon const &icon=QIcon())
Create the representative of the structure of rod components.
- [RodComponentsHierarchyItem](#) ([Core::HierarchyNode](#) *pNode, [Core::AbstractRodComponent](#) *pRod↔ Component)
Construct an item to represent a rod component.
- [RodComponentsHierarchyItem](#) ([Core::HierarchyNode](#) *pNode)
Construct an item to represent a directory.
- int **type** () const override

Private Member Functions

- void [appendItems](#) (Core::RodComponents &rodComponents, [Core::HierarchyNode](#) *pNode)
Create items based on the position in the tree structure.

Private Attributes

- [Core::AbstractRodComponent](#) * **mpRodComponent** = nullptr

Friends

- class **RodComponentsHierarchyModel**

Additional Inherited Members

4.37.1 Detailed Description

Item to represent a hierarchy of rod components.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.h>
- </home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/rodcomponentshierarchyitem.cpp>

4.38 QRS::HierarchyModels::RodComponentsHierarchyModel Class Reference

Tree model to represent and modify a hierarchy of rod components.

```
#include <rodcomponentshierarchymodel.h>
```

Inheritance diagram for QRS::HierarchyModels::RodComponentsHierarchyModel:

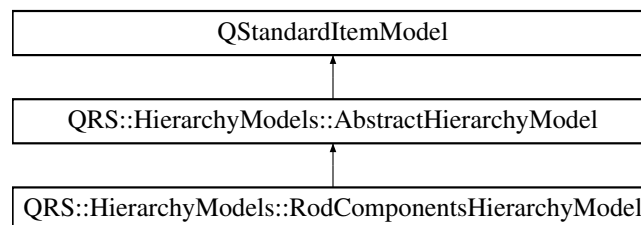

Public Slots

- void [retrieveSelectedItem](#) ()
Retrieve a selected rod component.
- void [removeSelectedItems](#) ()
Remove rod components under selection.

Signals

- void **selected** (Core::DataIDType id)
- void **selectionCleared** ()

Public Member Functions

- **RodComponentsHierarchyModel** (Core::RodComponents &rodComponents, [Core::HierarchyTree](#) &hierarchyRodComponents, QString const &mimeType, QTreeView *pView=nullptr)
 Update all the content.
- void [updateContent](#) () override
 Update all the content.
- void [clearContent](#) () override
 Clear all the items.
- bool [isEmpty](#) () const
 Check if there are data objects to represent.
- void [selectItem](#) (int iRow)
 Select an item by row index.

Private Slots

- void [renameItem](#) (QStandardItem *pStandardItem)
 Rename a rod component after editing.

Private Attributes

- Core::RodComponents & **mRodComponents**
- [Core::HierarchyTree](#) & **mHierarchyRodComponents**

Additional Inherited Members

4.38.1 Detailed Description

Tree model to represent and modify a hierarchy of rod components.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[rodcomponentshierarchymodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/[rodcomponentshierarchymodel.cpp](#)

4.39 QRS::Managers::RodComponentsManager Class Reference

Manager to create rod components, such as a geometry, cross section and force.

```
#include <rodcomponentsmanager.h>
```

Inheritance diagram for QRS::Managers::RodComponentsManager:

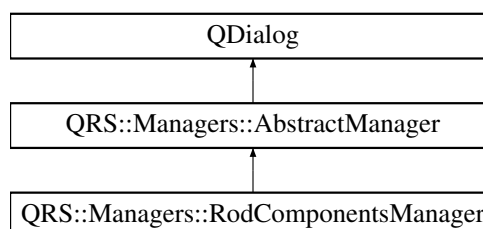

Public Slots

- void **apply** () override
Apply all the changes made by user.
- **Core::AbstractRodComponent** * **addGeometry** ()
Add a geometrical component.
- **Core::AbstractRodComponent** * **addSection** (**Core::AbstractSectionRodComponent::SectionType** sectionType)
Add a cross section.
- **Core::AbstractRodComponent** * **addMaterial** ()
Add a material component.
- **Core::AbstractRodComponent** * **addLoad** ()
Add a rod load.
- **Core::AbstractRodComponent** * **addConstraint** ()
Add a rod constraint.
- **Core::AbstractRodComponent** * **addMechanical** ()
Add a mechanical rod component.
- void **resolveRodComponentsReferences** ()
Resolve references of rod components.

Signals

- void **applied** (**Core::RodComponents** const &rodComponents, **Core::HierarchyTree** const &hierarchyRodComponents)
- void **editDataObjectRequested** (**Core::DataIDType** id)

Public Member Functions

- **RodComponentsManager** (**Core::DataObjects** &dataObjects, **Core::HierarchyTree** &hierarchyDataObjects, **Core::RodComponents** &&rodComponents, **Core::HierarchyTree** &&hierarchyRodComponents, **QString** &lastPath, **QSettings** &settings, **QWidget** *parent=nullptr)
- void **selectRodComponent** (int iRow)
Select a rod component by row index.
- void **updateDataObjects** ()
Update the representation of data objects.

Private Member Functions

- void **createContent** ()
Create all the widgets.
- **QLayout** * **createDialogControls** ()
Create dialog controls.
- **ads::CDockWidget** * **createHierarchyRodComponentsWidget** ()
Create a widget to show a hierarchy of rod components.
- **ads::CDockWidget** * **createConstructorDockWidget** ()
Create a dock widget to contain constructors of rod components.
- **ads::CDockWidget** * **createHierarchyDataObjectsWidget** ()
Create a widget to show a hierarchy of data objects.
- void **emplaceRodComponent** (**Core::AbstractRodComponent** *pRodComponent)

- *Helper function to insert a rod component into the manager.*
- void [representRodComponent](#) (Core::DataIDType id)
Represent a selected rod component according to its type.
- void [clearRodComponentRepresentation](#) ()
Delete a widget to represent properties of a rod component.
- QToolBar * [createMainToolBar](#) ()
Create a menu to choose types of components to construct.
- QWidget * [makeGeometryToolBar](#) ()
Create a toolbar to create geometrical components.
- QWidget * [makeSectionsToolBar](#) ()
Create a toolbar to construct cross sections.
- QWidget * [makeBoundaryConditionsToolBar](#) ()
Create a toolbar to construct boundary conditions.
- QWidget * [makeLoadingToolBar](#) ()
Create a toolbar to construct loading.
- QWidget * [makeMaterialToolBar](#) ()
Create a toolbar to construct materials.
- QWidget * [makeMechanicalToolBar](#) ()
Create a toolbar to construct mechanical components.
- QWidget * [makeModificationToolBar](#) ()
Create a toolbar to modify rod components.

Private Attributes

- ads::CDockWidget * **mpComponentDockWidget**
- QTreeView * **mpTreeRodComponents**
- Core::DataObjects & **mDataObjects**
- [Core::HierarchyTree](#) & **mHierarchyDataObjects**
- Core::RodComponents **mRodComponents**
- [Core::HierarchyTree](#) **mHierarchyRodComponents**
- [HierarchyModels::DataObjectsHierarchyModel](#) * **mpTreeDataObjectsModel**
- [HierarchyModels::RodComponentsHierarchyModel](#) * **mpTreeRodComponentsModel**

Additional Inherited Members

4.39.1 Detailed Description

Manager to create rod components, such as a geometry, cross section and force.

The documentation for this class was generated from the following files:

- </home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.h>
- </home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.cpp>

4.40 QRS::Core::Array< T >::Row< U > Struct Template Reference

Proxy class to acquire a row by index.

Public Member Functions

- **Row** (T *pData)
- T & **operator[]** (IndexType iCol)
- T const & **operator[]** (IndexType iCol) const

Public Attributes

- T * **pRow**

4.40.1 Detailed Description

```
template<typename T>
template<typename U>
struct QRS::Core::Array< T >::Row< U >
```

Proxy class to acquire a row by index.

The documentation for this struct was generated from the following file:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/array.h

4.41 QRS::Core::ScalarDataObject Class Reference

Scalar data object.

```
#include <scalardataobject.h>
```

Inheritance diagram for QRS::Core::ScalarDataObject:

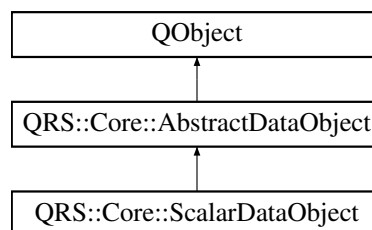

Public Member Functions

- [ScalarDataObject](#) (QString const &name)
Construct a scalar data object.
- [~ScalarDataObject](#) ()
Decrease a number of instances while being destroyed.
- [AbstractDataObject * clone](#) () const override
Clone a scalar data object.
- [DataItemType](#) & [addItem](#) (DataValueType key) override
Insert a new item into [ScalarDataObject](#).
- virtual void [import](#) (QTextStream &stream) override
Import a scalar data object from a file.

Static Public Member Functions

- static quint32 **numberInstances** ()

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.41.1 Detailed Description

Scalar data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[scalardataobject.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[scalardataobject.cpp](#)

4.42 QRS::Core::SurfaceDataObject Class Reference

Surface data object.

```
#include <surfacedataobject.h>
```

Inheritance diagram for QRS::Core::SurfaceDataObject:

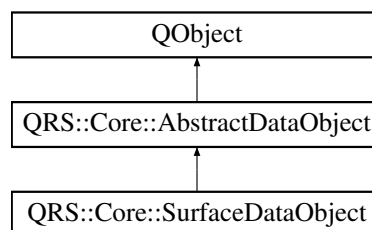

Public Member Functions

- [SurfaceDataObject](#) (QString const &name)
Construct a surface data object.
- [~SurfaceDataObject](#) ()
Decrease a number of instances while being destroyed.
- [AbstractDataObject * clone](#) () const override
Clone a surface data object.
- [DataItemType & addItem](#) (DataValueType key) override
Insert a new item into [SurfaceDataObject](#).
- [DataKeyType addLeadingItem](#) (DataValueType key)
Add a leading item.

- void [removeLeadingItem](#) (DataValueType key)
Remove a leading item.
- bool [changeLeadingItemKey](#) (DataKeyType oldKey, DataKeyType newKey)
Modify a leading item key.
- quint32 **numberLeadingItems** () const
- DataHolder & **getLeadingItems** ()
- void [serialize](#) (QDataStream &stream) const override
Serialize additional data of a surface object.
- virtual void [deserialize](#) (QDataStream &stream) override
Deserialize additional data of a surface object.
- virtual void [import](#) (QTextStream &stream) override
Import a surface data object from a file.

Static Public Member Functions

- static quint32 **numberInstances** ()

Private Attributes

- DataHolder **mLeadingItems**

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.42.1 Detailed Description

Surface data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[surfacedataobject.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[surfacedataobject.cpp](#)

4.43 QRS::TableModels::SurfaceTableModel Class Reference

Table model to represent a surface data object.

```
#include <surfacetablemodel.h>
```

Inheritance diagram for QRS::TableModels::SurfaceTableModel:

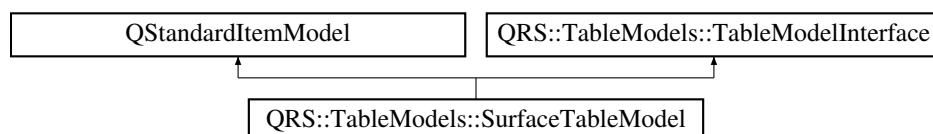

Public Member Functions

- **SurfaceTableModel** (QWidget *parent=nullptr)
- void **setDataObject** (Core::SurfaceDataObject *pDataObject)
Set a surface data object to represent.
- bool **setData** (const QModelIndex &indexEdit, const QVariant &value, int role=Qt::EditRole) override
Set the data acquired from a delegate.
- void **insertItemAfterSelected** (QItemSelectionModel *pSelectionModel) override
Insert a new item after selected one.
- void **removeSelectedItem** (QItemSelectionModel *pSelectionModel) override
Remove an array under selection.
- void **insertLeadingItemAfterSelected** (QItemSelectionModel *pSelectionModel) override
Add a new leading item after selected one.
- void **removeSelectedLeadingItem** (QItemSelectionModel *pSelectionModel) override
Remove a selected leading item.

Private Member Functions

- void **updateContent** ()
Represent all items which a data object contains.
- void **clearContent** ()
Clear previously created items.

Private Attributes

- Core::SurfaceDataObject * **mpDataObject** = nullptr

Additional Inherited Members

4.43.1 Detailed Description

Table model to represent a surface data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[surfacetablemodel.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[surfacetablemodel.cpp](#)

4.44 QRS::TableModels::TableModelInterface Class Reference

User interface to add and remove items.

```
#include <tablemodelinterface.h>
```

Inheritance diagram for QRS::TableModels::TableModelInterface:

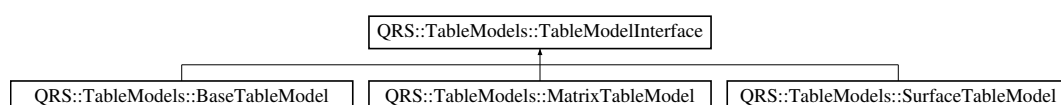

Public Member Functions

- virtual void **insertItemAfterSelected** (QItemSelectionModel *pSelectionModel)=0
- virtual void **insertLeadingItemAfterSelected** (QItemSelectionModel *pSelectionModel)=0
- virtual void **removeSelectedItem** (QItemSelectionModel *pSelectionModel)=0
- virtual void **removeSelectedLeadingItem** (QItemSelectionModel *pSelectionModel)=0

Static Public Member Functions

- static QStandardItem * **makeDoubleItem** (double value)
Helper function to make an item which holds a double value.
- static QList< QStandardItem * > **prepareRow** (Core::Array< double > const &array, quint32 iRow)
Helper function to copy a row from an array.
- static QList< QStandardItem * > **prepareRow** (double const &key, Core::Array< double > const &array, quint32 iRow)
Helper function to copy a row from an array and associate it with an key.
- static QList< QStandardItem * > **prepareRow** (QString const &name, Core::Array< double > const &array, quint32 iRow)
Helper function to copy a row from an array and associate it with a name.
- static QStandardItem * **makeLabelItem** (QString const &name)
Helper function to create an item which holds a string and cannot be modified.

4.44.1 Detailed Description

User interface to add and remove items.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[tablemodelinterface.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/[tablemodelinterface.cpp](#)

4.45 QRS::Core::UserSectionRodComponent Class Reference

Section which properties are defined by user.

```
#include <usersectionrodcomponent.h>
```

Inheritance diagram for QRS::Core::UserSectionRodComponent:

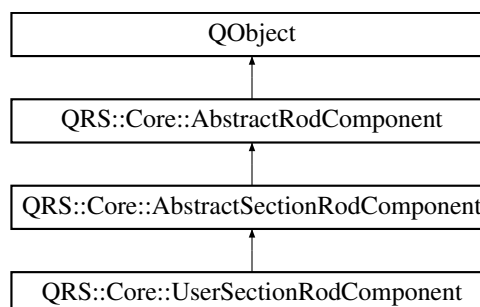

Public Member Functions

- **UserSectionRodComponent** (QString const &name)
- [AbstractRodComponent](#) * [clone](#) () const override
Clone a user-defined cross section.
- bool [isDataComplete](#) () const override
Check if specified data is complete.
- [ScalarDataObject](#) const * **area** () const
- [ScalarDataObject](#) const * **inertiaMomentTorsional** () const
- [ScalarDataObject](#) const * **inertiaMomentX** () const
- [ScalarDataObject](#) const * **inertiaMomentY** () const
- [ScalarDataObject](#) const * **centerCoordinateX** () const
- [ScalarDataObject](#) const * **centerCoordinateY** () const
- void **setArea** ([ScalarDataObject](#) const *pArea)
- void **setInertiaMomentTorsional** ([ScalarDataObject](#) const *pInertiaMomentTorsional)
- void **setInertiaMomentX** ([ScalarDataObject](#) const *pInertiaMomentX)
- void **setInertiaMomentY** ([ScalarDataObject](#) const *pInertiaMomentY)
- void **setCenterCoordinateX** ([ScalarDataObject](#) const *pCenterCoordinateX)
- void **setCenterCoordinateY** ([ScalarDataObject](#) const *pCenterCoordinateY)

Additional Inherited Members

4.45.1 Detailed Description

Section which properties are defined by user.

4.45.2 Member Function Documentation

4.45.2.1 isDataComplete()

```
bool UserSectionRodComponent::isDataComplete ( ) const [override], [virtual]
```

Check if specified data is complete.

Some of properties may be of zero values to achieve infinite stiffness

Implements [QRS::Core::AbstractRodComponent](#).

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[usersectionrodcomponent.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[usersectionrodcomponent.cpp](#)

4.46 QRS::Managers::UserSectionRodComponentWidget Class Reference

Widget to construct a user-defined section of a rod.

```
#include <usersectionrodcomponentwidget.h>
```

Inheritance diagram for QRS::Managers::UserSectionRodComponentWidget:

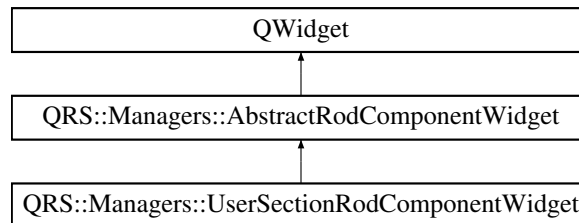

Public Member Functions

- **UserSectionRodComponentWidget** ([Core::UserSectionRodComponent](#) &userSectionRodComponent, QString const &mimeType, QWidget *parent=nullptr)

Private Member Functions

- void [createContent](#) ()
Create all the content.
- QLayout * [createAreaLayout](#) ()
Create an area layout.
- QWidget * [createInertiaMomentsGroup](#) ()
Create a group consisted of widgets to set moments of inertia.
- QWidget * [createCenterCoordinatesGroup](#) ()
Create a group consisted of widgets to set coordinates of the center.
- void [setProperty](#) ([Core::AbstractDataObject](#) const *pDataObject, auto setFun)
Set a section property which takes a scalar data object.

Private Attributes

- [Core::UserSectionRodComponent](#) & **mUserSectionRodComponent**

Additional Inherited Members

4.46.1 Detailed Description

Widget to construct a user-defined section of a rod.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[usersectionrodcomponentwidget.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/[usersectionrodcomponentwidget.cpp](#)

4.47 QRS::Core::VectorDataObject Class Reference

Vector data object.

```
#include <vectordataobject.h>
```

Inheritance diagram for QRS::Core::VectorDataObject:

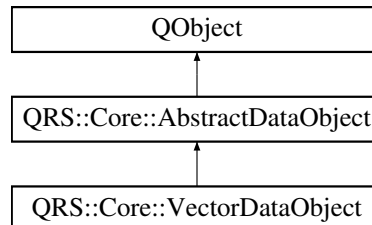

Public Member Functions

- [VectorDataObject](#) (QString const &name)
Construct a vector data object.
- [~VectorDataObject](#) ()
Decrease a number of instances while being destroyed.
- [AbstractDataObject * clone](#) () const override
Clone a vector data object.
- [DataItemType & addItem](#) (DataValueType key) override
Insert a new item into [VectorDataObject](#).
- virtual void [import](#) (QTextStream &stream) override
Import a vector data object from a file.

Static Public Member Functions

- static quint32 [numberInstances](#) ()

Static Private Attributes

- static quint32 [smNumInstances](#) = 0

Additional Inherited Members

4.47.1 Detailed Description

Vector data object.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[vectordataobject.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/[vectordataobject.cpp](#)

4.48 QRS::Graph::View3D Class Reference

A widget to represent the resulted rod system.

```
#include <view3d.h>
```

Inheritance diagram for QRS::Graph::View3D:

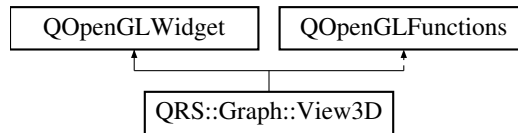

Public Member Functions

- **View3D** (QWidget *parent=nullptr)

Protected Member Functions

- void **initializeGL** () override
Initialize a graphical scene.
- void **paintGL** () override
Render its content.

Private Attributes

- bool **mCore**

4.48.1 Detailed Description

A widget to represent the resulted rod system.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/QRodSystems/src/render/[view3d.h](#)
- /home/qinterfly/Library/Projects/Current/QRodSystems/src/render/[view3d.cpp](#)

Chapter 5

File Documentation

5.1 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/central/controltabs.cpp File Reference

Implementation of the ControlTabs class.

```
#include <QLayout>
#include <QToolBar>
#include <QIcon>
#include "controltabs.h"
```

5.1.1 Detailed Description

Implementation of the ControlTabs class.

Author

Pavel Lakiza

Date

March 2021

5.2 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/central/controltabs.h File Reference

Declaration of the ControlTabs class.

```
#include <QWidget>
```

Classes

- class [QRS::App::ManagersTab](#)

A toolbar consisted of object designers.

5.2.1 Detailed Description

Declaration of the ControlTabs class.

Author

Pavel Lakiza

Date

March 2021

5.3 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/central/logwidget.cpp File Reference

Implementation of the LogWidget class.

```
#include <QHeaderView>
#include <QTime>
#include <QTimer>
#include "logwidget.h"
```

Enumerations

- enum **ColumnType** { kTime , kType , kMessage }

5.3.1 Detailed Description

Implementation of the LogWidget class.

Author

Pavel Lakiza

Date

May 2021

5.4 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/logwidget.h File Reference

Declaration of the LogWidget class.

```
#include <QTableWidget>
```

Classes

- class [QRS::App::LogWidget](#)
Log all the messages sent.

5.4.1 Detailed Description

Declaration of the LogWidget class.

Author

Pavel Lakiza

Date

May 2021

5.5 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/mainwindow.cpp File Reference

Implementation of the MainWindow class.

```
#include <QToolBar>
#include <QTreeView>
#include <QTableView>
#include <QHeaderView>
#include <QTextEdit>
#include <QVBoxLayout>
#include <QSettings>
#include <QMessageBox>
#include <QFileDialog>
#include <QLabel>
#include "DockManager.h"
#include "DockWidget.h"
#include "DockAreaWidget.h"
#include "ads_globals.h"
#include "mainwindow.h"
#include "ui_mainwindow.h"
#include "controltabs.h"
#include "logwidget.h"
#include "uiconstants.h"
#include "models/hierarchy/projecthierarchymodel.h"
#include "models/properties/dataobjectspropertiesmodel.h"
#include "managers/managersfactory.h"
#include "render/view3d.h"
```

5.5.1 Detailed Description

Implementation of the MainWindow class.

Author

Pavel Lakiza

Date

May 2021

5.6 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/central/mainwindow.h File Reference

Declaration of the MainWindow class.

```
#include <QMainWindow>
#include "logwidget.h"
#include "core/project.h"
```

Classes

- class [QRS::App::MainWindow](#)
The main window of the program.

Functions

- void [QRS::App::throwMessage](#) (QtMsgType type, const QMessageLogContext &, const QString &message)
Log all the messages.

5.6.1 Detailed Description

Declaration of the MainWindow class.

Author

Pavel Lakiza

Date

May 2021

5.7 /home/qinterfly/Library/Projects/Current/QRodSystems/src/central/uiconstants.h File Reference

Common graphical constants shared between several windows.

```
#include <QString>
```

Variables

- const QString **QRS::UiConstants::Settings::skGeometry** = "geometry"
- const QString **QRS::UiConstants::Settings::skState** = "state"
- const QString **QRS::UiConstants::Settings::skDockingState** = "dockingState"

5.7.1 Detailed Description

Common graphical constants shared between several windows.

Author

Pavel Lakiza

Date

April 2021

5.8 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractdataobject.cpp File Reference

Implementation of the AbstractDataObject class.

```
#include "abstractdataobject.h"
```

5.8.1 Detailed Description

Implementation of the AbstractDataObject class.

Author

Pavel Lakiza

Date

April 2021

5.9 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/core/abstractdataobject.h File Reference

Declaration of the AbstractDataObject class.

```
#include <QObject>
#include <QString>
#include <QDataStream>
#include <map>
#include "array.h"
#include "aliasdata.h"
```

Classes

- class [QRS::Core::AbstractDataObject](#)
Data object which is designed in the way to be represented in a table easily.

Typedefs

- using **QRS::Core::DataItemType** = Array< DataValueType >
- using **QRS::Core::DataHolder** = std::map< DataKeyType, DataItemType >

Functions

- QDataStream & [QRS::Core::operator<<](#) (QDataStream &stream, AbstractDataObject const &obj)
Print a data object to a stream.

5.9.1 Detailed Description

Declaration of the AbstractDataObject class.

Author

Pavel Lakiza

Date

July 2021

5.10 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/core/abstractrodcomponent.cpp File Reference

Definition of the AbstractRodComponent class.

```
#include "abstractrodcomponent.h"
#include "abstractdataobject.h"
```

5.10.1 Detailed Description

Definition of the AbstractRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.11 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/abstractrodcomponent.h File Reference

Declaration of the AbstractRodComponent class.

```
#include <QObject>
#include <QString>
#include <QDataStream>
#include "aliasdataset.h"
```

Classes

- class [QRS::Core::AbstractRodComponent](#)
Component of the rod structure which characterizes one of its properties.

Functions

- [QDataStream & QRS::Core::operator<<](#) (QDataStream &stream, AbstractRodComponent const &component)
Print a rod component to a stream.

5.11.1 Detailed Description

Declaration of the AbstractRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.12 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/abstractsectionrodcomponent.cpp File Reference

Definition of the AbstractSectionRodComponent class.

```
#include "abstractsectionrodcomponent.h"  
#include "core/scalardataobject.h"
```

5.12.1 Detailed Description

Definition of the AbstractSectionRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.13 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/abstractsectionrodcomponent.h File Reference

Declaration of the AbstractSectionRodComponent class.

```
#include <QPointer>  
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::AbstractSectionRodComponent](#)
General cross section of a rod.

5.13.1 Detailed Description

Declaration of the AbstractSectionRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.14 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/aliasdata.h File Reference

Specification of data types used in a project.

```
#include <QtGlobal>
```

Typedefs

- using **QRS::Core::DataValueType** = double
- using **QRS::Core::DataKeyType** = double
- using **QRS::Core::DataIDType** = quint64

5.14.1 Detailed Description

Specification of data types used in a project.

Author

Pavel Lakiza

Date

May 2021

5.15 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/aliasdataset.h File Reference

Specification of types of datasets used in a project.

```
#include <unordered_map>
#include "aliasdata.h"
```

Typedefs

- using **QRS::Core::DataObjects** = std::unordered_map< DataIDType, AbstractDataObject * >
- using **QRS::Core::RodComponents** = std::unordered_map< DataIDType, AbstractRodComponent * >

5.15.1 Detailed Description

Specification of types of datasets used in a project.

Author

Pavel Lakiza

Date

June 2021

5.16 /home/qinterfly/Library/Projects/Current/QRod↩ Systems/src/core/array.cpp File Reference

Implementation of the Array class.

```
#include "array.h"
```

5.16.1 Detailed Description

Implementation of the Array class.

Author

Pavel Lakiza

Date

March 2021

5.17 /home/qinterfly/Library/Projects/Current/QRod↩ Systems/src/core/array.h File Reference

Declaration of the Array class.

```
#include <QDebug>
```

Classes

- class [QRS::Core::Array< T >](#)
Numerical array class.
- struct [QRS::Core::Array< T >::Row< U >](#)
Proxy class to acquire a row by index.

Typedefs

- using [QRS::Core::IndexType](#) = quint32

Functions

- template<typename K >
[QDebug QRS::Core::operator<<](#) (QDebug stream, Array< K > &array)
Print all array values using the matrix format.
- template<typename K >
[QDataStream & QRS::Core::operator<<](#) (QDataStream &stream, Array< K > const &array)
Write an array to a stream.
- template<typename K >
[QDataStream & QRS::Core::operator>>](#) (QDataStream &stream, Array< K > &array)
Read an array from a stream.

5.17.1 Detailed Description

Declaration of the Array class.

Author

Pavel Lakiza

Date

June 2021

5.18 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/constraintrodcomponent.cpp File Reference

Definition of the ConstraintRodComponent class.

```
#include "constraintrodcomponent.h"
```

5.18.1 Detailed Description

Definition of the ConstraintRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.19 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/constraintrodcomponent.h File Reference

Declaration of the ConstraintRodComponent class.

```
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::ConstraintRodComponent](#)
Component to restrict movements of a rod.

5.19.1 Detailed Description

Declaration of the ConstraintRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.20 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/geometryrodcomponent.cpp File Reference

Definition of the GeometryRodComponent class.

```
#include "geometryrodcomponent.h"  
#include "vectordataobject.h"  
#include "matrixdataobject.h"
```

5.20.1 Detailed Description

Definition of the GeometryRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.21 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/geometryrodcomponent.h File Reference

Declaration of the GeometryRodComponent class.

```
#include <QPointer>  
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::GeometryRodComponent](#)
Geometrical configuration of a rod.

5.21.1 Detailed Description

Declaration of the GeometryRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.22 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.cpp File Reference

Implementation of the HierarchyNode class.

```
#include "hierarchynode.h"
```

5.22.1 Detailed Description

Implementation of the HierarchyNode class.

Author

Pavel Lakiza

Date

May 2021

5.23 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/hierarchynode.h File Reference

Declaration of the HierarchyNode class.

```
#include <QVariant>
#include <QDataStream>
```

Classes

- class [QRS::Core::HierarchyNode](#)
Hierarchy representative.

5.23.1 Detailed Description

Declaration of the HierarchyNode class.

Author

Pavel Lakiza

Date

May 2021

5.24 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/hierarchytree.cpp File Reference

Implementation of the HierarchyTree class.

```
#include "hierarchytree.h"
```

5.24.1 Detailed Description

Implementation of the HierarchyTree class.

Author

Pavel Lakiza

Date

June 2021

5.25 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/hierarchytree.h File Reference

Declaration of the HierarchyTree class.

```
#include <QDebug>  
#include "hierarchynode.h"
```

Classes

- class [QRS::Core::HierarchyTree](#)
Hierarchy of data objects (n-array tree)

Functions

- QDebug [QRS::Core::operator<<](#) (QDebug stream, HierarchyTree &tree)
Print a tree structure.
- QDataStream & [QRS::Core::operator<<](#) (QDataStream &stream, HierarchyTree const &tree)
Write a tree structure to a stream.

5.25.1 Detailed Description

Declaration of the HierarchyTree class.

Author

Pavel Lakiza

Date

June 2021

5.26 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/core/loadrodcomponent.cpp File Reference

Definition of the LoadRodComponent class.

```
#include "loadrodcomponent.h"  
#include "scalardataobject.h"  
#include "vectordataobject.h"
```

5.26.1 Detailed Description

Definition of the LoadRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.27 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/core/loadrodcomponent.h File Reference

Declaration of the LoadRodComponent class.

```
#include <QPointer>  
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::LoadRodComponent](#)
Load applied to a rod.

5.27.1 Detailed Description

Declaration of the LoadRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.28 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/materialrodcomponent.cpp File Reference

Definition of the MaterialRodComponent class.

```
#include "materialrodcomponent.h"  
#include "scalardataobject.h"
```

5.28.1 Detailed Description

Definition of the MaterialRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.29 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/materialrodcomponent.h File Reference

Declaration of the MaterialRodComponent class.

```
#include <QPointer>  
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::MaterialRodComponent](#)
Material properties of a rod.

5.29.1 Detailed Description

Declaration of the MaterialRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.30 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.cpp File Reference

Implementation of the MatrixDataObject class.

```
#include "matrixdataobject.h"
```

Variables

- const IndexType **skNumElements** = 3

5.30.1 Detailed Description

Implementation of the MatrixDataObject class.

Author

Pavel Lakiza

Date

June 2021

5.31 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/matrixdataobject.h File Reference

Declaration of the MatrixDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [QRS::Core::MatrixDataObject](#)
Matrix data object.

5.31.1 Detailed Description

Declaration of the MatrixDataObject class.

Author

Pavel Lakiza

Date

April 2021

5.32 [/home/qinterfly/Library/Projects/Current/QRod↔](#) Systems/src/core/mechanicalrodcomponent.cpp File Reference

Definition of the MechanicalRodComponent class.

```
#include "mechanicalrodcomponent.h"  
#include "scalardataobject.h"
```

5.32.1 Detailed Description

Definition of the MechanicalRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.33 [/home/qinterfly/Library/Projects/Current/QRod↔](#) Systems/src/core/mechanicalrodcomponent.h File Reference

Declaration of the MechanicalRodComponent class.

```
#include <QPointer>  
#include "abstractrodcomponent.h"
```

Classes

- class [QRS::Core::MechanicalRodComponent](#)
Stiffness and mass distributions of a rod.

5.33.1 Detailed Description

Declaration of the MechanicalRodComponent class.

Author

Pavel Lakiza

Date

July 2021

5.34 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project-base.cpp File Reference

Implementation of the Project class.

```
#include <QRandomGenerator>
#include "project.h"
#include "scalarsdataobject.h"
#include "vectorsdataobject.h"
#include "matrixdataobject.h"
#include "surfacedataobject.h"
#include "geometryrodcomponent.h"
#include "usersectionrodcomponent.h"
#include "materialrodcomponent.h"
#include "loadrodcomponent.h"
#include "constraintrodcomponent.h"
#include "mechanicalrodcomponent.h"
```

Functions

- `template<typename T >`
`void clearDataMap (std::unordered_map< DataIDType, T * > &dataMap)`
Helper function to clear a map consisted of data pointers.
- `AbstractDataObject * createDataObject (AbstractDataObject::ObjectType type)`
Helper function to create DataObject instance by a type and name.

5.34.1 Detailed Description

Implementation of the Project class.

Author

Pavel Lakiza

Date

June 2021

Implementation of the methods to operate with data objects, components and rods

5.35 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/project-io.cpp File Reference

Implementation of the Project class.

```
#include <QFileInfo>
#include <QDir>
#include <QDataStream>
#include <QDateTime>
#include "project.h"
#include "scalardataobject.h"
#include "vectordataobject.h"
#include "matrixdataobject.h"
#include "surfacedataobject.h"
#include "geometryrodcomponent.h"
#include "usersectionrodcomponent.h"
#include "materialrodcomponent.h"
#include "loadrodcomponent.h"
#include "constraintrodcomponent.h"
#include "mechanicalrodcomponent.h"
#include "utilities.h"
```

Functions

- void [readDataObjects](#) (QDataStream &inputStream, DataObjects &dataObjects)
Helper function to read a set of data objects from a stream.
- void [readRodComponents](#) (QDataStream &inputStream, DataObjects const &dataObjects, RodComponents &rodComponents)
Helper function to read rod components from a stream.
- void [readHierarchyTree](#) (QDataStream &inputStream, [HierarchyTree](#) &hierarchy)
Helper function to read a hierarchial tree from a stream.

5.35.1 Detailed Description

Implementation of the Project class.

Author

Pavel Lakiza

Date

June 2021

Implementation of the methods to operate with input/output streams

5.36 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/project.h File Reference

Declaration of the Project class.

```
#include <QObject>
#include "aliasdataset.h"
#include "array.h"
#include "hierarchytree.h"
#include "abstractdataobject.h"
#include "abstractrodcomponent.h"
#include "abstractsectionrodcomponent.h"
```

Classes

- class [QRS::Core::Project](#)
Project class to interact with a created system of rods.

5.36.1 Detailed Description

Declaration of the Project class.

Author

Pavel Lakiza

Date

June 2021

5.37 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/scalardataobject.cpp File Reference

Implementation of the ScalarDataObject class.

```
#include "scalardataobject.h"
```

5.37.1 Detailed Description

Implementation of the ScalarDataObject class.

Author

Pavel Lakiza

Date

June 2021

5.38 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/scalardataobject.h File Reference

Declaration of the ScalarDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [QRS::Core::ScalarDataObject](#)
Scalar data object.

5.38.1 Detailed Description

Declaration of the ScalarDataObject class.

Author

Pavel Lakiza

Date

April 2021

5.39 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.cpp File Reference

Implementation of the SurfaceDataObject class.

```
#include "surfacedataobject.h"
```

5.39.1 Detailed Description

Implementation of the SurfaceDataObject class.

Author

Pavel Lakiza

Date

June 2021

5.40 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/surfacedataobject.h File Reference

Declaration of the SurfaceDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [QRS::Core::SurfaceDataObject](#)
Surface data object.

5.40.1 Detailed Description

Declaration of the SurfaceDataObject class.

Author

Pavel Lakiza

Date

April 2021

5.41 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/usersectionrodcomponent.cpp File Reference

Definition of the UserSectionRodComponent class.

```
#include "usersectionrodcomponent.h"
```

5.41.1 Detailed Description

Definition of the UserSectionRodComponent class.

Author

Pavel Lakiza

Date

June 2021

5.42 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/usersectionrodcomponent.h File Reference

Declaration of the UserSectionRodComponent class.

```
#include "abstractsectionrodcomponent.h"  
#include "core/scalardataobject.h"
```

Classes

- class [QRS::Core::UserSectionRodComponent](#)
Section which properties are defined by user.

5.42.1 Detailed Description

Declaration of the UserSectionRodComponent class.

Author

Pavel Lakiza

Date

June 2021

5.43 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.cpp File Reference

Implementation of utilities.

```
#include <QDebug>
#include <QString>
#include <QFile>
#include <QDir>
#include <QPair>
#include "utilities.h"
```

5.43.1 Detailed Description

Implementation of utilities.

Author

Pavel Lakiza

Date

May 2021

5.44 /home/qinterfly/Library/Projects/Current/QRodSystems/src/core/utilities.h File Reference

Declaration of utilities.

```
#include <QSharedPointer>
#include "abstractdataobject.h"
```

Functions

- `QPair< Core::AbstractDataObject::ObjectType, QSharedPointer< QFile > >` [QRS::Utilities::File::getDataObjectFile](#) (QString const &path, QString const &fileName)
Retrieve a pair consisted of a data object file and its type.
- `QString` [QRS::Utilities::File::loadFileContent](#) (QString const &path)
Load a style sheet.

5.44.1 Detailed Description

Declaration of utilities.

Author

Pavel Lakiza

Date

May 2021

5.45 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/vectordataobject.cpp File Reference

Implementation of the VectorDataObject class.

```
#include "vectordataobject.h"
```

Variables

- const IndexType **skNumElements** = 3

5.45.1 Detailed Description

Implementation of the VectorDataObject class.

Author

Pavel Lakiza

Date

June 2021

5.46 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/core/vectordataobject.h File Reference

Declaration of the VectorDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [QRS::Core::VectorDataObject](#)
Vector data object.

5.46.1 Detailed Description

Declaration of the VectorDataObject class.

Author

Pavel Lakiza

Date

April 2021

5.47 /home/qinterfly/Library/Projects/Current/QRodSystems/src/main/main.cpp File Reference ↩

The startup function.

```
#include <QFile>
#include <QApplication>
#include <QFontDatabase>
#include "mainwindow.h"
#include "utilities.h"
```

Functions

- int `main` (int argc, char *argv[])
Entry point.

5.47.1 Detailed Description

The startup function.

Author

Pavel Lakiza

Date

May 2021

5.48 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/abstractmanager.cpp File Reference ↩

Definition of the AbstractManager class.

```
#include <QMessageBox>
#include <QSettings>
#include <QToolBar>
#include "abstractmanager.h"
#include "central/uiconstants.h"
#include "DockManager.h"
```

5.48.1 Detailed Description

Definition of the AbstractManager class.

Author

Pavel Lakiza

Date

May 2021

5.49 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/abstractmanager.h File Reference

Declaration of the AbstractManager class.

```
#include <QDialog>
```

Classes

- class [QRS::Managers::AbstractManager](#)
Abstract manager to create objects of different types.

5.49.1 Detailed Description

Declaration of the AbstractManager class.

Author

Pavel Lakiza

Date

May 2021

5.50 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/abstractrodcomponentwidget.cpp File Reference

Definition of the AbstractRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"  
#include "core/abstractdataobject.h"  
#include "dataobjectlineedit.h"
```

5.50.1 Detailed Description

Definition of the AbstractRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.51 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/abstractrodcomponentwidget.h File Reference

Declaration of the AbstractRodComponentWidget class.

```
#include <QWidget>
#include "core/aliasdata.h"
```

Classes

- class [QRS::Managers::AbstractRodComponentWidget](#)
Widget to construct rod components of different types.

Typedefs

- using **QRS::Managers::DataObjectSetFun** = std::function< void(Core::AbstractDataObject const *)>

5.51.1 Detailed Description

Declaration of the AbstractRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.52 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/constraintitemdelegate.cpp File Reference

Definition of the ComboBoxItemDelegate class.

```
#include <QComboBox>
#include "constraintitemdelegate.h"
```

5.52.1 Detailed Description

Definition of the ComboBoxItemDelegate class.

Author

Pavel Lakiza

Date

July 2021

5.53 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/constraintitemdelegate.h File Reference

Declaration of the ComboBoxItemDelegate class.

```
#include <QStyledItemDelegate>
#include "core/constraintrodcomponent.h"
```

Classes

- class [QRS::Managers::ConstraintItemDelegate](#)
Class to specify how options of a constraint can be edited.

Typedefs

- using **QRS::Managers::ConstraintTypeNames** = std::map< Core::ConstraintRodComponent::↵
ConstraintType, QString >
- using **QRS::Managers::ConstraintCoordinateSystemNames** = std::map< Core::ConstraintRod↵
Component::ConstraintCoordinateSystem, QString >

5.53.1 Detailed Description

Declaration of the ComboBoxItemDelegate class.

Author

Pavel Lakiza

Date

July 2021

5.54 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/constraintrodcomponentwidget.cpp File Reference

Definition of the ConstraintRodComponentWidget class.

```
#include <QVBoxLayout>
#include <QTableWidget>
#include <QHeaderView>
#include <QToolBar>
#include <set>
#include "constraintrodcomponentwidget.h"
#include "core/constraintrodcomponent.h"
```

5.54.1 Detailed Description

Definition of the ConstraintRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.55 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/constraintrodcomponentwidget.h File Reference

Declaration of the ConstraintRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
#include "constraintitemdelegate.h"
```

Classes

- class [QRS::Managers::ConstraintRodComponentWidget](#)
Widget to consturct constraints of a rod.

5.55.1 Detailed Description

Declaration of the ConstraintRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.56 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/managers/dataobjectlineedit.cpp File Reference

Definition of the DataPointerLineEdit class.

```
#include <QMimeData>
#include <QDragEnterEvent>
#include <QMenu>
#include "dataobjectlineedit.h"
#include "models/hierarchy/dataobjectshierarchyitem.h"
```

5.56.1 Detailed Description

Definition of the DataPointerLineEdit class.

Author

Pavel Lakiza

Date

June 2021

5.57 [/home/qinterfly/Library/Projects/Current/QRod↵](#) Systems/src/managers/dataobjectlineedit.h File Reference

Declaration of the DataPointerLineEdit class.

```
#include <QLineEdit>
#include "core/abstractdataobject.h"
```

Classes

- class [QRS::Managers::DataObjectLineEdit](#)
Line edit widget to hold a pointer to a data object.

5.57.1 Detailed Description

Declaration of the DataPointerLineEdit class.

Author

Pavel Lakiza

Date

June 2021

5.58 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/dataobjectsmanager.cpp File Reference

Implementation of the DataObjectsManager class.

```
#include <QTreeView>
#include <QSettings>
#include <QHBoxLayout>
#include <QToolBar>
#include <QListWidget>
#include <QTextEdit>
#include <QPushButton>
#include <QSpacerItem>
#include <QShortcut>
#include <QFileDialog>
#include "DockManager.h"
#include "DockWidget.h"
#include "DockAreaWidget.h"
#include "dataobjectsmanager.h"
#include "central/uiconstants.h"
#include "core/scalardataobject.h"
#include "core/vectordataobject.h"
#include "core/matrixdataobject.h"
#include "core/surfacedataobject.h"
#include "core/utilities.h"
#include "models/table/basetablemodel.h"
#include "models/table/matrixtablemodel.h"
#include "models/table/surfacetablemodel.h"
#include "models/hierarchy/dataobjectshierarchy.h"
#include "doublespinboxitemdelegate.h"
```

Functions

- void **setToolBarShortcutHints** (QToolBar *pToolBar)
- QIcon **getDataObjectIcon** (AbstractDataObject::ObjectType type)

Helper function to assign an appropriate data object icon.

5.58.1 Detailed Description

Implementation of the DataObjectsManager class.

Author

Pavel Lakiza

Date

June 2021

5.59 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/dataobjectsmanager.h File Reference

Declaration of the DataObjectsManager class.

```
#include <unordered_map>
#include "abstractmanager.h"
#include "core/aliasdata.h"
#include "core/aliasdataset.h"
#include "core/hierarchytree.h"
```

Classes

- class [QRS::Managers::DataObjectsManager](#)
Manager to create objects of different types: scalars, vectors, matroces and surfaces.

5.59.1 Detailed Description

Declaration of the DataObjectsManager class.

Author

Pavel Lakiza

Date

June 2021

5.60 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/doublespinboxitemdelegate.cpp File Reference

Definition of the DoubleSpinBoxItemDelegate class.

```
#include <QDoubleSpinBox>
#include "doublespinboxitemdelegate.h"
```

5.60.1 Detailed Description

Definition of the DoubleSpinBoxItemDelegate class.

Author

Pavel Lakiza

Date

July 2021

5.61 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/doublespinboxitemdelegate.h File Reference

Declaration of the DoubleSpinBoxItemDelegate class.

```
#include <QStyledItemDelegate>
```

Classes

- class [QRS::Managers::DoubleSpinBoxItemDelegate](#)
Class to specify how table values can be edited.

5.61.1 Detailed Description

Declaration of the DoubleSpinBoxItemDelegate class.

Author

Pavel Lakiza

Date

July 2021

5.62 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/geometryrodcomponentwidget.cpp File Reference

Definiton of the GeometryComponentWidget class.

```
#include <QGridLayout>
#include <QSpacerItem>
#include <QLabel>
#include "geometryrodcomponentwidget.h"
#include "dataobjectlineedit.h"
#include "core/geometryrodcomponent.h"
#include "core/vectordataobject.h"
#include "core/matrixdataobject.h"
```

5.62.1 Detailed Description

Definiton of the GeometryComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.63 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/geometryrodcomponentwidget.h File Reference

Declaration of the GeometryComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
```

Classes

- class [QRS::Managers::GeometryRodComponentWidget](#)
Widget to construct a geometrical rod component.

5.63.1 Detailed Description

Declaration of the GeometryComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.64 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/loadrodcomponentwidget.cpp File Reference

Definition of the LoadRodComponentWidget class.

```
#include <QVBoxLayout>
#include <QLabel>
#include <QComboBox>
#include <QGroupBox>
#include <QDoubleSpinBox>
#include <QCheckBox>
#include "loadrodcomponentwidget.h"
#include "dataobjectlineedit.h"
#include "core/scalardataobject.h"
#include "core/vectordataobject.h"
```


5.64.1 Detailed Description

Definition of the LoadRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.65 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/loadrodcomponentwidget.h File Reference

Declaration of the LoadRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
#include "core/loadrodcomponent.h"
```

Classes

- class [QRS::Managers::LoadRodComponentWidget](#)
Widget to construct a load applied to a rod.

5.65.1 Detailed Description

Declaration of the LoadRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.66 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/managersfactory.cpp File Reference

Definition of the ManagersFactory class.

```
#include <QApplication>
#include <QDesktopWidget>
#include "managersfactory.h"
#include "core/project.h"
#include "managers/dataobjectsmanager.h"
#include "managers/rodcomponentsmanager.h"
```

Functions

- void [moveToCenter](#) (QWidget *pWidget)

Helper function to situate widgets at the center of their parent widgets.

5.66.1 Detailed Description

Definition of the ManagersFactory class.

Author

Pavel Lakiza

Date

June 2021

5.67 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/managersfactory.h File Reference

Declaration of the ManagersFactory class.

```
#include <QObject>
#include "abstractmanager.h"
```

Classes

- class [QRS::Managers::ManagersFactory](#)

Factory to create managers which utilize and modify project data.

5.67.1 Detailed Description

Declaration of the ManagersFactory class.

Author

Pavel Lakiza

Date

June 2021

5.68 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.cpp File Reference

Definition of the MaterialRodComponentWidget class.

```
#include <QGridLayout>
#include <QSpacerItem>
#include <QLabel>
#include <QGroupBox>
#include "materialrodcomponentwidget.h"
#include "dataobjectlineedit.h"
#include "core/materialrodcomponent.h"
#include "core/scalardataobject.h"
```

5.68.1 Detailed Description

Definition of the MaterialRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.69 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/materialrodcomponentwidget.h File Reference

Declaration of the MaterialRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
```

Classes

- class [QRS::Managers::MaterialRodComponentWidget](#)
Widget to construct a material rod component.

5.69.1 Detailed Description

Declaration of the MaterialRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.70 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/mechanicalrodcomponentwidget.cpp File Reference

Definition of the MechanicalRodComponentWidget class.

```
#include <QVBoxLayout>
#include <QGroupBox>
#include <QLabel>
#include "mechanicalrodcomponentwidget.h"
#include "dataobjectlineedit.h"
#include "core/mechanicalrodcomponent.h"
#include "core/scalardataobject.h"
```

5.70.1 Detailed Description

Definition of the MechanicalRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.71 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/mechanicalrodcomponentwidget.h File Reference

Declaration of the MechanicalRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
```

Classes

- class [QRS::Managers::MechanicalRodComponentWidget](#)
Widget to construct mechanical rod components consisted of stiffness and mass distributions.

5.71.1 Detailed Description

Declaration of the MechanicalRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.72 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/rodcomponentsmanager.cpp File Reference

Definition of the RodComponentsManager class.

```
#include <QVBoxLayout>
#include <QPushButton>
#include <QTreeView>
#include <QToolBar>
#include <QLabel>
#include "DockManager.h"
#include "DockWidget.h"
#include "DockAreaWidget.h"
#include "rodcomponentsmanager.h"
#include "core/vectordataobject.h"
#include "core/matrixdataobject.h"
#include "core/geometryrodcomponent.h"
#include "core/usersectionrodcomponent.h"
#include "core/materialrodcomponent.h"
#include "core/loadrodcomponent.h"
#include "core/constraintrodcomponent.h"
#include "core/mechanicalrodcomponent.h"
#include "managers/geometryrodcomponentwidget.h"
#include "managers/usersectionrodcomponentwidget.h"
#include "managers/materialrodcomponentwidget.h"
#include "managers/loadrodcomponentwidget.h"
#include "managers/constraintrodcomponentwidget.h"
#include "managers/mechanicalrodcomponentwidget.h"
#include "models/hierarchy/dataobjectshierarchymodel.h"
#include "models/hierarchy/rodcomponentshierarchymodel.h"
```

Functions

- QWidget * [addToolBarHeader](#) (QToolBar *pToolBar, QString const &name)
Helper function to add the header to a toolbar.
- [AbstractRodComponentWidget](#) * [createRodComponentWidget](#) ([AbstractRodComponent](#) *pRodComponent, ads::CDockWidget *pDockWidget)
Create an appropriate constructor of a rod component.

Variables

- QSize const **skToolBarIconSize** = QSize(27, 27)
- QString const **skDataObjectsMimeType** = "rodcomponentsmanager/dataobjectshierarchy"

5.72.1 Detailed Description

Definition of the RodComponentsManager class.

Author

Pavel Lakiza

Date

May 2021

5.73 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/rodcomponentsmanager.h File Reference

Declaration of the RodComponentsManager class.

```
#include "managers/abstractmanager.h"
#include "core/aliasdataset.h"
#include "core/hierarchytree.h"
#include "core/abstractsectionrodcomponent.h"
```

Classes

- class [QRS::Managers::RodComponentsManager](#)
Manager to create rod components, such as a geometry, cross section and force.

5.73.1 Detailed Description

Declaration of the RodComponentsManager class.

Author

Pavel Lakiza

Date

March 2021

5.74 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/managers/usersectionrodcomponentwidget.cpp File Reference

Definition of the UserSectionRodComponentWidget class.

```
#include <QVBoxLayout>
#include <QGroupBox>
#include <QLabel>
#include "usersectionrodcomponentwidget.h"
#include "core/usersectionrodcomponent.h"
#include "dataobjectlineedit.h"
```

5.74.1 Detailed Description

Definition of the UserSectionRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.75 /home/qinterfly/Library/Projects/Current/QRodSystems/src/managers/usersectionrodcomponentwidget.h File Reference

Declaration of the UserSectionRodComponentWidget class.

```
#include "abstractrodcomponentwidget.h"
```

Classes

- class [QRS::Managers::UserSectionRodComponentWidget](#)
Widget to construct a user-defined section of a rod.

5.75.1 Detailed Description

Declaration of the UserSectionRodComponentWidget class.

Author

Pavel Lakiza

Date

July 2021

5.76 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchyitem.cpp File Reference

Definition of the AbstractHierarchyItem class.

```
#include "abstracthierarchyitem.h"
#include "core/hierarchy/node.h"
```

5.76.1 Detailed Description

Definition of the AbstractHierarchyItem class.

Author

Pavel Lakiza

Date

May 2021

5.77 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/abstrachierarchyitem.h File Reference

Declaration of the AbstractHierarchyItem class.

```
#include <QStandardItem>
```

Classes

- class [QRS::HierarchyModels::AbstractHierarchyItem](#)
Item to represent a hierarchy of elements of the same type.

5.77.1 Detailed Description

Declaration of the AbstractHierarchyItem class.

Author

Pavel Lakiza

Date

May 2021

5.78 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/abstrachierarchymodel.cpp File Reference

Definition of the AbstractHierarchyModel class.

```
#include <QTreeView>
#include <QMimeData>
#include <unordered_map>
#include "abstrachierarchymodel.h"
#include "core/hierarchynode.h"
```

5.78.1 Detailed Description

Definition of the AbstractHierarchyModel class.

Author

Pavel Lakiza

Date

July 2021

5.79 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/abstracthierarchymodel.h File Reference

Declaration of the AbstractHierarchyModel class.

```
#include <QStandardItemModel>
#include "abstracthierarchyitem.h"
```

Classes

- class [QRS::HierarchyModels::AbstractHierarchyModel](#)
Hierarchy model which enables one to drag and drop elements of the same type.

Typedefs

- using **QRS::HierarchyModels::NodesState** = std::unordered_map< Core::HierarchyNode *, bool >

5.79.1 Detailed Description

Declaration of the AbstractHierarchyModel class.

Author

Pavel Lakiza

Date

July 2021

5.80 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/hierarchy/dataobjectshierarchyitem.cpp File Reference

Definition of the DataObjectsHierarchyItem class.

```
#include "dataobjectshierarchyitem.h"
#include "core/abstractdataobject.h"
#include "core/hierarchytree.h"
```

Functions

- QIcon [getDataObjectIcon](#) (AbstractDataObject::ObjectType type)
Helper function to assign an appropriate data object icon.

5.80.1 Detailed Description

Definition of the DataObjectsHierarchyItem class.

Author

Pavel Lakiza

Date

May 2021

5.81 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/dataobjectshierarchyitem.h File Reference

Declaration of the DataObjectsHierarchyItem class.

```
#include "models/hierarchy/abstrachierarchyitem.h"  
#include "core/aliasdataset.h"
```

Classes

- class [QRS::HierarchyModels::DataObjectsHierarchyItem](#)
Item to represent a hierarchy of data objects.

5.81.1 Detailed Description

Declaration of the DataObjectsHierarchyItem class.

Author

Pavel Lakiza

Date

May 2021

5.82 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/dataobjectshierarchymodel.cpp File Reference

Definition of the DataObjectsHierarchyModel class.

```
#include <QTreeView>  
#include <QMimeData>  
#include "dataobjectshierarchymodel.h"  
#include "dataobjectshierarchyitem.h"  
#include "core/abstractdataobject.h"  
#include "core/hierarchytree.h"
```

5.82.1 Detailed Description

Definition of the DataObjectsHierarchyModel class.

Author

Pavel Lakiza

Date

July 2021

5.83 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/models/hierarchy/dataobjectshierarchymodel.h File Reference

Declaration of the DataObjectsHierarchyModel class.

```
#include "models/hierarchy/abstrachierarchymodel.h"
#include "core/aliasdataset.h"
```

Classes

- class [QRS::HierarchyModels::DataObjectsHierarchyModel](#)
Tree model to represent and modify a hierarchy of data objects.

5.83.1 Detailed Description

Declaration of the DataObjectsHierarchyModel class.

Author

Pavel Lakiza

Date

July 2021

5.84 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/models/hierarchy/projecthierarchymodel.cpp File Reference

Definition of the ProjectHierarchyModel class.

```
#include <QTreeView>
#include "projecthierarchymodel.h"
#include "dataobjectshierarchyitem.h"
#include "rodcomponentshierarchyitem.h"
```

5.84.1 Detailed Description

Definition of the ProjectHierarchyModel class.

Author

Pavel Lakiza

Date

May 2021

5.85 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/projecthierarchymodel.h File Reference

Declaration of the ProjectHierarchyModel class.

```
#include "models/hierarchy/abstrachhierarchymodel.h"
#include "core/aliasdata.h"
#include "core/project.h"
```

Classes

- class [QRS::HierarchyModels::ProjectHierarchyModel](#)
Project hierarchy representative.

5.85.1 Detailed Description

Declaration of the ProjectHierarchyModel class.

Author

Pavel Lakiza

Date

May 2021

5.86 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/rodcomponentshierarchyitem.cpp File Reference

Definition of the RodComponentsHierarchyItem class.

```
#include "rodcomponentshierarchyitem.h"
#include "core/abstractrodcomponent.h"
#include "core/abstractsectionrodcomponent.h"
#include "core/hierarchytree.h"
```

Functions

- QIcon [getRodComponentIcon](#) ([AbstractRodComponent](#) const *pRodComponent)
Helper function to assign an appropriate rod component icon.

5.86.1 Detailed Description

Definition of the RodComponentsHierarchyItem class.

Author

Pavel Lakiza

Date

June 2021

5.87 /home/qinterfly/Library/Projects/Current/QRod↵ Systems/src/models/hierarchy/rodcomponentshierarchyitem.h File Reference

Declaration of the RodComponentsHierarchyItem class.

```
#include "models/hierarchy/abstrachierarchyitem.h"  
#include "core/aliasdataset.h"
```

Classes

- class [QRS::HierarchyModels::RodComponentsHierarchyItem](#)
Item to represent a hierarchy of rod components.

5.87.1 Detailed Description

Declaration of the RodComponentsHierarchyItem class.

Author

Pavel Lakiza

Date

June 2021

5.88 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/rodcomponentshierarchymodel.cpp File Reference

Definition of the RodComponentsHierarchyModel class.

```
#include <QTreeView>
#include <QMimeData>
#include "rodcomponentshierarchymodel.h"
#include "rodcomponentshierarchyitem.h"
#include "core/abstractrodcomponent.h"
#include "core/hierarchytree.h"
```

5.88.1 Detailed Description

Definition of the RodComponentsHierarchyModel class.

Author

Pavel Lakiza

Date

June 2021

5.89 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/hierarchy/rodcomponentshierarchymodel.h File Reference

Declaration of the RodComponentsHierarchyModel class.

```
#include "models/hierarchy/abstrachierarchymodel.h"
#include "core/aliasdataset.h"
```

Classes

- class [QRS::HierarchyModels::RodComponentsHierarchyModel](#)
Tree model to represent and modify a hierarchy of rod components.

5.89.1 Detailed Description

Declaration of the RodComponentsHierarchyModel class.

Author

Pavel Lakiza

Date

June 2021

5.90 /home/qinterfly/Library/Projects/Current/QRod↔ Systems/src/models/properties/dataobjectspropertiesmodel.cpp File Reference

Definition of the DataObjectsPropertiesModel class.

```
#include <QTableView>
#include "dataobjectspropertiesmodel.h"
#include "core/abstractdataobject.h"
#include "core/surfacedataobject.h"
#include "core/hierarchy/hierarchyitem.h"
#include "models/hierarchy/abstracthierarchyitem.h"
#include "models/hierarchy/dataobjectshierarchyitem.h"
```

5.90.1 Detailed Description

Definition of the DataObjectsPropertiesModel class.

Author

Pavel Lakiza

Date

May 2021

5.91 /home/qinterfly/Library/Projects/Current/QRod↔ Systems/src/models/properties/dataobjectspropertiesmodel.h File Reference

Declaration of the DataObjectsPropertiesModel class.

```
#include <QStandardItemModel>
```

Classes

- class [QRS::PropertiesModels::DataObjectsPropertiesModel](#)
Model to represent properties of selected data objects.

5.91.1 Detailed Description

Declaration of the DataObjectsPropertiesModel class.

Author

Pavel Lakiza

Date

May 2021

5.92 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/table/basetablemodel.cpp File Reference

Implementation of the BaseTableModel class.

```
#include <QTreeView>
#include "basetablemodel.h"
#include "core/abstractdataobject.h"
```

5.92.1 Detailed Description

Implementation of the BaseTableModel class.

Author

Pavel Lakiza

Date

June 2021

5.93 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/table/basetablemodel.h File Reference

Declaration of the BaseTableModel class.

```
#include <QStandardItemModel>
#include "tablemodelinterface.h"
```

Classes

- class [QRS::TableModels::BaseTableModel](#)
Table model to represent either a scalar or vector data object.

5.93.1 Detailed Description

Declaration of the BaseTableModel class.

Author

Pavel Lakiza

Date

March 2021

5.94 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.cpp File Reference

Implementation of the MatrixTableModel class.

```
#include <QTreeView>
#include "matrixtablemodel.h"
#include "core/abstractdataobject.h"
```

5.94.1 Detailed Description

Implementation of the MatrixTableModel class.

Author

Pavel Lakiza

Date

June 2021

5.95 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/matrixtablemodel.h File Reference

Declaration of the MatrixTableModel class.

```
#include <QStandardItemModel>
#include "tablemodelinterface.h"
```

Classes

- class [QRS::TableModels::MatrixTableModel](#)
Table model to represent a matrix data object.

5.95.1 Detailed Description

Declaration of the MatrixTableModel class.

Author

Pavel Lakiza

Date

March 2021

5.96 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/table/surfacetablemodel.cpp File Reference

Implementation of the SurfaceTableModel class.

```
#include <QTreeView>
#include "surfacetablemodel.h"
#include "core/surfacedataobject.h"
```

5.96.1 Detailed Description

Implementation of the SurfaceTableModel class.

Author

Pavel Lakiza

Date

June 2021

5.97 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/models/table/surfacetablemodel.h File Reference

Declaration of the SurfaceTableModel class.

```
#include <QStandardItemModel>
#include "tablemodelinterface.h"
```

Classes

- class [QRS::TableModels::SurfaceTableModel](#)
Table model to represent a surface data object.

5.97.1 Detailed Description

Declaration of the SurfaceTableModel class.

Author

Pavel Lakiza

Date

March 2021

5.98 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.cpp File Reference

Implementation of static functions of TableModelInterface.

```
#include <QStandardItem>
#include "tablemodelinterface.h"
#include "core/array.h"
```

5.98.1 Detailed Description

Implementation of static functions of TableModelInterface.

Author

Pavel Lakiza

Date

June 2021

5.99 /home/qinterfly/Library/Projects/Current/QRodSystems/src/models/table/tablemodelinterface.h File Reference

Declaration of the TableModelInterface.

```
#include <QItemSelection>
```

Classes

- class [QRS::TableModels::TableModelInterface](#)
User interface to add and remove items.

5.99.1 Detailed Description

Declaration of the TableModelInterface.

Author

Pavel Lakiza

Date

June 2021

5.100 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/render/view3d.cpp File Reference

Implementation of the View3D class.

```
#include <QOpenGLContext>
#include <QOpenGLPaintDevice>
#include <QPainter>
#include "view3d.h"
```

5.100.1 Detailed Description

Implementation of the View3D class.

Author

Pavel Lakiza

Date

March 2021

5.101 [/home/qinterfly/Library/Projects/Current/QRod](#) Systems/src/render/view3d.h File Reference

Declaration of the View3D class.

```
#include <QOpenGLWidget>
#include <QOpenGLFunctions>
```

Classes

- class [QRS::Graph::View3D](#)
A widget to represent the resulted rod system.

5.101.1 Detailed Description

Declaration of the View3D class.

Author

Pavel Lakiza

Date

March 2021