

RodSystemEstimator

Generated by Doxygen 1.9.3

1 Hierarchical Index	1
1.1 Class Hierarchy	1
2 Class Index	3
2.1 Class List	3
3 File Index	5
3.1 File List	5
4 Class Documentation	9
4.1 RSE::Core::AbstractDataObject Class Reference	9
4.1.1 Detailed Description	10
4.1.2 Member Function Documentation	10
4.1.2.1 addItem()	11
4.1.2.2 clone()	11
4.1.2.3 deserialize()	11
4.1.2.4 import()	11
4.2 RSE::Viewers::AbstractGraphData Class Reference	11
4.2.1 Member Function Documentation	12
4.2.1.1 getDataset()	12
4.2.1.2 sliceByIndex()	13
4.3 RSE::Core::Array< T > Class Template Reference	13
4.3.1 Detailed Description	14
4.4 RSE::Core::Cable Struct Reference	14
4.4.1 Detailed Description	15
4.5 RSE::Viewers::ConvergenceViewer Class Reference	15
4.5.1 Detailed Description	16
4.6 RSE::Core::Damper Class Reference	16
4.6.1 Detailed Description	17
4.7 RSE::Core::DataBaseCables Class Reference	17
4.7.1 Detailed Description	18
4.8 RSE::Models::DoubleSpinBoxItemDelegate Class Reference	18
4.8.1 Detailed Description	18
4.9 KLP::EnergyFrame Struct Reference	19
4.9.1 Detailed Description	19
4.10 RSE::Viewers::EnergyGraphData Class Reference	19
4.10.1 Detailed Description	20
4.10.2 Member Function Documentation	20
4.10.2.1 getDataset()	20
4.10.2.2 type()	20
4.11 RSE::Viewers::EstimationGraphData Class Reference	20
4.11.1 Detailed Description	21
4.11.2 Member Function Documentation	21

4.11.2.1 getDataset()	21
4.11.2.2 type()	21
4.12 RSE::Viewers::ExtendedSurfaceHandler Class Reference	22
4.12.1 Detailed Description	22
4.13 RSE::Viewers::FigureManager Class Reference	23
4.13.1 Detailed Description	23
4.14 KLP::FrameCollection Struct Reference	24
4.14.1 Detailed Description	24
4.15 KLP::FrameObject< T > Class Template Reference	25
4.16 KLP::FrameObjectIterator< T > Class Template Reference	25
4.16.1 Detailed Description	26
4.17 RSE::Viewers::Graph Class Reference	26
4.18 RSE::Viewers::GraphDataSlicer Class Reference	28
4.19 RSE::Models::GraphListModel Class Reference	29
4.20 KLP::Index Struct Reference	30
4.20.1 Detailed Description	30
4.21 KLP::IndexData Struct Reference	30
4.21.1 Detailed Description	31
4.22 RSE::Core::IO Class Reference	31
4.22.1 Detailed Description	31
4.23 RSE::Viewers::KinematicsGraphData Class Reference	32
4.23.1 Detailed Description	32
4.23.2 Member Function Documentation	32
4.23.2.1 getDataset()	33
4.23.2.2 type()	33
4.24 RSE::Viewers::KLPGraphViewer Class Reference	33
4.24.1 Detailed Description	34
4.25 RSE::App::MainWindow Class Reference	35
4.25.1 Detailed Description	37
4.26 RSE::Core::Project Class Reference	38
4.27 RSE::Viewers::PropertyTreeWidget Class Reference	39
4.28 KLP::Result Class Reference	41
4.28.1 Detailed Description	42
4.29 KLP::ResultInfo Struct Reference	42
4.30 RSE::Models::ResultListModel Class Reference	43
4.31 RSE::Core::RodSystem Class Reference	44
4.32 RSE::Core::RodSystemParameters Struct Reference	44
4.32.1 Detailed Description	45
4.33 RSE::Models::RodSystemTableModel Class Reference	45
4.33.1 Detailed Description	46
4.34 RSE::Core::Array< T >::Row< U > Class Template Reference	46
4.34.1 Detailed Description	46

4.35 RSE::Core::ScalarDataObject Class Reference	46
4.35.1 Detailed Description	47
4.35.2 Member Function Documentation	47
4.35.2.1 addItem()	47
4.35.2.2 clone()	48
4.35.2.3 import()	48
4.36 RSE::Solution::SolutionManager Class Reference	48
4.36.1 Detailed Description	49
4.37 RSE::Solution::SolutionOptions Class Reference	49
4.38 RSE::Viewers::SpaceTimeGraphData Class Reference	50
4.38.1 Detailed Description	51
4.38.2 Member Function Documentation	51
4.38.2.1 getDataset()	51
4.38.2.2 type()	51
4.39 RSE::Core::Spans Struct Reference	51
4.39.1 Detailed Description	52
4.40 KLP::StateFrame Struct Reference	52
4.40.1 Detailed Description	52
4.41 RSE::Core::Support Class Reference	52
4.41.1 Detailed Description	53
4.42 RSE::Core::VectorDataObject Class Reference	53
4.42.1 Detailed Description	54
4.42.2 Member Function Documentation	54
4.42.2.1 addItem()	54
4.42.2.2 clone()	54
4.42.2.3 import()	54
5 File Documentation	55
5.1 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.cpp File Reference	55
5.1.1 Detailed Description	55
5.2 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.h File Reference	55
5.2.1 Detailed Description	56
5.3 doublespinboxitemdelegate.h	56
5.4 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/mainwindow.cpp File Reference	56
5.4.1 Detailed Description	57
5.5 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/mainwindow.h File Reference	57
5.5.1 Detailed Description	58
5.6 mainwindow.h	58
5.7 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/rodsystemtablemodel.cpp File Reference	60

5.7.1 Detailed Description	60
5.8 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/rodsystemtablemodel.h File Reference	60
5.8.1 Detailed Description	61
5.9 rodsystemtablemodel.h	61
5.10 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/uiconstants.h File Reference	61
5.10.1 Detailed Description	62
5.11 uiconstants.h	62
5.12 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/abstractdataobject.cpp File Reference	62
5.12.1 Detailed Description	63
5.13 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/abstractdataobject.h File Reference	63
5.13.1 Detailed Description	63
5.14 abstractdataobject.h	64
5.15 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/aliasdata.h File Reference	64
5.15.1 Detailed Description	65
5.16 aliasdata.h	65
5.17 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/array.cpp File Reference	65
5.17.1 Detailed Description	66
5.18 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/array.h File Reference	66
5.18.1 Detailed Description	67
5.19 array.h	67
5.20 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/constants.h File Reference	68
5.20.1 Detailed Description	69
5.21 constants.h	69
5.22 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/damper.cpp File Reference	69
5.22.1 Detailed Description	69
5.23 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/damper.h File Reference	70
5.23.1 Detailed Description	70
5.24 damper.h	70
5.25 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.cpp File Reference	71
5.25.1 Detailed Description	71
5.26 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.h File Reference	71
5.26.1 Detailed Description	71
5.27 databasecables.h	72
5.28 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/fileutilities.cpp File Reference	72
5.28.1 Detailed Description	72
5.29 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/fileutilities.h File Reference	73
5.29.1 Detailed Description	73
5.30 fileutilities.h	73

5.31 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.cpp File Reference	74
5.31.1 Detailed Description	74
5.32 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.h File Reference	74
5.32.1 Detailed Description	75
5.33 io.h	75
5.34 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/numericalutilities.h File Reference	75
5.34.1 Detailed Description	76
5.35 numericalutilities.h	76
5.36 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/project.cpp File Reference	76
5.36.1 Detailed Description	77
5.37 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/project.h File Reference	77
5.37.1 Detailed Description	78
5.38 project.h	78
5.39 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.cpp File Reference	79
5.39.1 Detailed Description	79
5.40 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.h File Reference	80
5.40.1 Detailed Description	80
5.41 rodsystem.h	80
5.42 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.cpp File Reference	81
5.42.1 Detailed Description	81
5.43 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.h File Reference	81
5.43.1 Detailed Description	82
5.44 scalardataobject.h	82
5.45 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.cpp File Reference	82
5.45.1 Detailed Description	83
5.46 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.h File Reference	83
5.46.1 Detailed Description	83
5.47 solutionmanager.h	84
5.48 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionoptions.cpp File Reference	84
5.48.1 Detailed Description	84
5.49 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionoptions.h File Reference	85
5.49.1 Detailed Description	85
5.50 solutionoptions.h	85
5.51 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.cpp File Reference	86
5.51.1 Detailed Description	86
5.52 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.h File Reference	86
5.52.1 Detailed Description	87

5.53 support.h	87
5.54 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.cpp File Reference	87
5.54.1 Detailed Description	88
5.55 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.h File Reference	88
5.55.1 Detailed Description	88
5.56 vectordataobject.h	88
5.57 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/aliasklp.h File Reference	89
5.57.1 Detailed Description	89
5.58 aliasklp.h	89
5.59 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h File Reference	89
5.59.1 Detailed Description	90
5.60 framecollection.h	90
5.61 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.cpp File Reference	91
5.61.1 Detailed Description	91
5.62 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.h File Reference	91
5.62.1 Detailed Description	92
5.63 frameobject.h	92
5.64 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.cpp File Reference	93
5.64.1 Detailed Description	93
5.65 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.h File Reference	93
5.65.1 Detailed Description	93
5.66 frameobjectiterator.h	94
5.67 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/index.h File Reference	94
5.67.1 Detailed Description	95
5.68 index.h	95
5.69 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/result.cpp File Reference	95
5.69.1 Detailed Description	96
5.70 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/result.h File Reference	96
5.70.1 Detailed Description	96
5.71 result.h	97
5.72 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/types.h File Reference	97
5.72.1 Detailed Description	98
5.73 types.h	98
5.74 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/main/main.cpp File Reference	99
5.74.1 Detailed Description	99
5.75 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/abstractgraphdata.cpp File Reference	99
5.75.1 Detailed Description	100
5.76 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/abstractgraphdata.h File Reference	100

5.76.1 Detailed Description	100
5.77 abstractgraphdata.h	101
5.78 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/aliasviewers.h File Reference	101
5.78.1 Detailed Description	102
5.79 aliasviewers.h	102
5.80 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/apputilities.cpp File Reference	102
5.80.1 Detailed Description	103
5.81 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/apputilities.h File Reference	103
5.81.1 Detailed Description	103
5.82 apputilities.h	104
5.83 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/convergenceviewer.cpp File Reference	104
5.83.1 Detailed Description	104
5.84 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/convergenceviewer.h File Reference	104
5.84.1 Detailed Description	105
5.85 convergenceviewer.h	105
5.86 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.cpp File Reference	105
5.86.1 Detailed Description	106
5.87 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.h File Reference	106
5.87.1 Detailed Description	106
5.88 energygraphdata.h	107
5.89 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/estimationgraphdata.cpp File Reference	107
5.89.1 Detailed Description	107
5.90 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/estimationgraphdata.h File Reference	107
5.90.1 Detailed Description	108
5.91 estimationgraphdata.h	108
5.92 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedsurfacehandler.cpp File Reference	109
5.92.1 Detailed Description	109
5.93 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedsurfacehandler.h File Reference	109
5.93.1 Detailed Description	109
5.94 extendedsurfacehandler.h	110
5.95 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.cpp File Reference	110
5.95.1 Detailed Description	110
5.96 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.h File Reference	111

5.96.1 Detailed Description	111
5.97 figuremanager.h	111
5.98 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.cpp File Reference	112
5.98.1 Detailed Description	112
5.99 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.h File Reference	112
5.99.1 Detailed Description	113
5.100 graph.h	113
5.101 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.cpp File Reference	114
5.101.1 Detailed Description	114
5.102 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.h File Reference	115
5.102.1 Detailed Description	115
5.103 graphdataslicer.h	115
5.104 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphlistmodel.cpp File Reference	116
5.104.1 Detailed Description	116
5.105 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphlistmodel.h File Reference	116
5.105.1 Detailed Description	117
5.106 graphlistmodel.h	117
5.107 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.cpp File Reference	117
5.107.1 Detailed Description	118
5.108 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.h File Reference	118
5.108.1 Detailed Description	118
5.109 kinematicsgraphdata.h	119
5.110 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.cpp File Reference	119
5.110.1 Detailed Description	120
5.111 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.h File Reference	120
5.111.1 Detailed Description	121
5.112 klpgraphviewer.h	121
5.113 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/propertytreewidget.cpp File Reference	122
5.113.1 Detailed Description	122
5.114 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/propertytreewidget.h File Reference	123
5.114.1 Detailed Description	123
5.115 propertytreewidget.h	124
5.116 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/resultlistmodel.cpp File Reference	125
5.116.1 Detailed Description	125

5.117	/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/resultlistmodel.h	File Reference	125
5.117.1	Detailed Description		126
5.118	resultlistmodel.h		126
5.119	/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.cpp	File Reference	126
5.119.1	Detailed Description		127
5.120	/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.h	File Reference	127
5.120.1	Detailed Description		127
5.121	spacetimegraphdata.h		128

Chapter 1

Hierarchical Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

RSE::Core::Array< T >	13
RSE::Core::Array< double >	13
RSE::Core::Cable	14
RSE::Core::Damper	16
RSE::Core::DataBaseCables	17
KLP::EnergyFrame	19
RSE::Viewers::FigureManager	23
KLP::FrameCollection	24
KLP::FrameObject< T >	25
KLP::FrameObject< float >	25
KLP::FrameObjectIterator< T >	25
RSE::Viewers::Graph	26
KLP::Index	30
KLP::IndexData	30
RSE::Core::IO	31
RSE::Core::Project	38
Q3DInputHandler	
RSE::Viewers::ExtendedSurfaceHandler	22
QCustomPlot	
RSE::Viewers::ExtendedGraphPlot	??
QMainWindow	
RSE::App::MainWindow	35
QObject	
RSE::Core::AbstractDataObject	9
RSE::Core::ScalarDataObject	46
RSE::Core::VectorDataObject	53
RSE::Solution::SolutionManager	48
RSE::Viewers::AbstractGraphData	11
RSE::Viewers::EnergyGraphData	19
RSE::Viewers::EstimationGraphData	20
RSE::Viewers::KinematicsGraphData	32
RSE::Viewers::SpaceTimeGraphData	50
RSE::Viewers::GraphDataSlicer	28
QStandardItemModel	
RSE::Models::GraphListModel	29

RSE::Models::ResultListModel	43
RSE::Models::RodSystemTableModel	45
QStyledItemDelegate	
RSE::Models::DoubleSpinBoxItemDelegate	18
QTreeWidget	
RSE::Viewers::PropertyTreeWidget	39
QWidget	
RSE::Viewers::ConvergenceViewer	15
RSE::Viewers::KLPGraphViewer	33
KLP::Result	41
KLP::ResultInfo	42
RSE::Core::RodSystem	44
RSE::Core::RodSystemParameters	44
RSE::Core::Array< T >::Row< U >	46
RSE::Solution::SolutionOptions	49
RSE::Core::Spans	51
KLP::StateFrame	52
RSE::Core::Support	52

Chapter 2

Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

RSE::Core::AbstractDataObject	9
Data object which is designed in the way to be represented in a table easily	
RSE::Viewers::AbstractGraphData	11
RSE::Core::Array< T >	
Numerical array class	13
RSE::Core::Cable	
Mechanical properties of a cable	14
RSE::Viewers::ConvergenceViewer	
Class to represent convergence of viscosities	15
RSE::Core::Damper	
Class to compute and collect properties of a damper	16
RSE::Core::DataBaseCables	
Aggregate data of cables	17
RSE::Models::DoubleSpinBoxItemDelegate	
Class to specify how table values can be edited	18
KLP::EnergyFrame	
Energy quantities associated with a frame	19
RSE::Viewers::EnergyGraphData	
Class to deal with energy entities of KLP-data	19
RSE::Viewers::EstimationGraphData	
Class to estimate errors of entities in KLP-data	20
RSE::Viewers::ExtendedGraphPlot	??
RSE::Viewers::ExtendedSurfaceHandler	
Class which enables additional actions while working with a 3D-surface	22
RSE::Viewers::FigureManager	
Manager to create and select figures of different types: graphs and surfaces	23
KLP::FrameCollection	
Set of all quantities belonged to a frame	24
KLP::FrameObject< T >	25
KLP::FrameObjectIterator< T >	
Class to iterate through data of a record	25
RSE::Viewers::Graph	26
RSE::Viewers::GraphDataSlicer	28
RSE::Models::GraphListModel	29
KLP::Index	
Structure to navigate through records	30

KLP::IndexData	
Data of each record	30
RSE::Core::IO	
Class to save the project and solution data	31
RSE::Viewers::KinematicsGraphData	
Class to deal with kinematics of KLP-data	32
RSE::Viewers::KLPGraphViewer	
Class to graphically represent content of KLP output files	33
RSE::App::MainWindow	
Central window of the program	35
RSE::Core::Project	38
RSE::Viewers::PropertyTreeWidget	39
KLP::Result	
Class to aggregate all the records	41
KLP::ResultInfo	42
RSE::Models::ResultListModel	43
RSE::Core::RodSystem	44
RSE::Core::RodSystemParameters	
Parameters of a rod system	44
RSE::Models::RodSystemTableModel	
Table model to set and represent data of a rod system	45
RSE::Core::Array< T >::Row< U >	
Proxy class to acquire a row by index	46
RSE::Core::ScalarDataObject	
Scalar data object	46
RSE::Solution::SolutionManager	
Class to control the solution process	48
RSE::Solution::SolutionOptions	49
RSE::Viewers::SpaceTimeGraphData	
Class to deal with spacetime KLP-data	50
RSE::Core::Spans	
Computed parameters of spans	51
KLP::StateFrame	
Kinematic and dynamic quantities associated with a frame	52
RSE::Core::Support	
Class to aggregate data of supports	52
RSE::Core::VectorDataObject	
Vector data object	53

Chapter 3

File Index

3.1 File List

Here is a list of all documented files with brief descriptions:

/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ doublespinboxitemdelegate.cpp	
DoubleSpinBoxItemDelegate	55
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ doublespinboxitemdelegate.h	
DoubleSpinBoxItemDelegate	55
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ mainwindow.cpp	
Definition of the MainWindow class	56
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ mainwindow.h	
Declaration of the MainWindow class	57
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ rodsystemtablemodel.cpp	
Definition of the RodSystemTableModel class	60
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ rodsystemtablemodel.h	
Declaration of the RodSystemTableModel class	60
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/ uiconstants.h	
Graphical constants shared between several widgets	61
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ abstractdataobject.cpp	
Implementation of the AbstractDataObject class	62
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ abstractdataobject.h	
Declaration of the AbstractDataObject class	63
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ aliasdata.h	
Specification of data types used in a project	64
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ array.cpp	
Implementation of the Array class	65
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ array.h	
Declaration of the Array class	66
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ constants.h	
Computational constants	68
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ damper.cpp	
Definition of the Damper class	69
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ damper.h	
Declaration the Damper class	70
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ databasecables.cpp	
Definition of the DataBaseCables class	71
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ databasecables.h	
Declaration of the DataBaseCables class	71
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/ fileutilities.cpp	
Definition of utilites targeted to working with files	72

/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/fileutilities.h	
Declaration of utilities targeted to working with files	73
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.cpp	
Definition of the IO class	74
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.h	
Declaration of the IO class	74
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/numericalutilities.h	
Declaration of utilities targeted to numerical operations	75
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/project.cpp	
Definition of the Project class	76
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/project.h	
Declaration of the Project class	77
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.cpp	
Definition of the RodSystem class	79
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.h	
Declaration of the RodSystem class	80
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.cpp	
Implementation of the ScalarDataObject class	81
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.h	
Declaration of the ScalarDataObject class	81
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.cpp	
Definition of the SolutionManager class	82
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.h	
Declaration of the SolutionManager class	83
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionoptions.cpp	
Definition of the SolutionOptions class	84
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionoptions.h	
Declaration of the SolutionOptions class	85
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.cpp	
Definition of the Support class	86
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.h	
Declaration of the Support class	86
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.cpp	
Implementation of the VectorDataObject class	87
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.h	
Declaration of the VectorDataObject class	88
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/aliasklp.h	
Declaration of aliases used in KLP results	89
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h	
Collection of the data associated with the specified frame	89
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.cpp	
Definition of the FrameObject class	91
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.h	
Declaration of the FrameObject class	91
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.cpp	
Definition of the FrameObjectIterator class	93
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.h	
Declaration of the FrameObjectIterator class	93
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/index.h	
Specification of a structure to index records	94
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/result.cpp	
Definition of the Result class	95
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/result.h	
Declaration of the Result class	96
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/types.h	
Specification of data types in a KLP file	97
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/main/main.cpp	
Startup	99

/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/abstractgraphdata.cpp	
Definition of the AbstractGraphData class	99
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/abstractgraphdata.h	
Declaration of the AbstractGraphData class	100
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/aliasviewers.h	
Declaration of aliases used in viewers	101
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/apputilities.cpp	
Definition of utilites targeted to working with application data	102
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/apputilities.h	
Declaration of utilities targeted to working with application data	103
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/convergenceviewer.cpp	
Definition of the ConvergenceViewer class	104
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/convergenceviewer.h	
Declaration of the ConvergenceViewer class	104
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.cpp	
Definition of the EnergyGraphData class	105
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.h	
Declaration of the EnergyGraphData class	106
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/estimationgraphdata.cpp	
Declaration of the EstimationGraphData class	107
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/estimationgraphdata.h	
Declaration of the EstimationGraphData class	107
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.cpp	
Definition of the ExtendedGraphPlot class	??
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.h	
Declaration of the ExtendedGraphPlot class	??
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedsurfacehandler.cpp	
Definition of the ExtendedSurfaceHandler class	109
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedsurfacehandler.h	
Declaration of the ExtendedSurfaceHandler class	109
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.cpp	
Definition of the FigureManager class	110
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.h	
Declaration of the FigureManager class	111
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.cpp	
Definition of the Graph class	112
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.h	
Declaration of the Graph class	112
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.cpp	
Definition of the GraphDataSlicer class	114
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.h	
Declaration of the GraphDataSlicer class	115
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphlistmodel.cpp	
Definition of the GraphListModel class	116
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphlistmodel.h	
Declaration of the GraphListModel class	116
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.cpp	
Definition of the KinematisGraphData class	117
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.h	
Declaration of the KinematisGraphData class	118
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.cpp	
Definition of the KLPGraphViewer class	119
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.h	
Declaration of the KLPGraphViewer class	120
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/propertytreewidget.cpp	
Definition of the PropertyTreeWidget class	122
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/propertytreewidget.h	
Declaration of the PropertyTreeWidget class	123

/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/resultlistmodel.cpp	
Definition of the KLPResultListModel class	125
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/resultlistmodel.h	
Declaration of the KLPResultListModel class	125
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.cpp	
Definition of the SpaceTimeGraphData class	126
/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.h	
Declaration of the SpaceTimeGraphData class	127

Chapter 4


Class Documentation

4.1 RSE::Core::AbstractDataObject Class Reference

Data object which is designed in the way to be represented in a table easily.

```
#include <abstractdataobject.h>
```

Inheritance diagram for RSE::Core::AbstractDataObject:

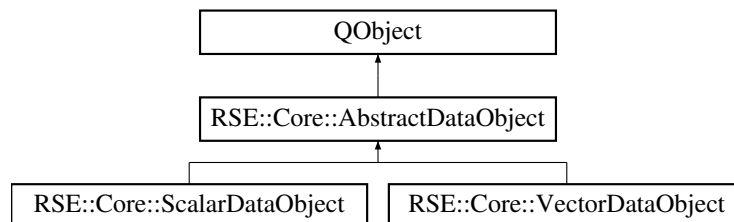

Public Types

- enum **ObjectType** { **kScalar** , **kVector** , **kMatrix** , **kSurface** }

Public Member Functions

- **AbstractDataObject** (ObjectType type, QString const &name)
Base constructor.
- virtual **AbstractDataObject** * **clone** () const =0
- virtual **DataItemType** & **addItem** (DataKeyType key)=0
- void **removeItem** (DataValueType key)
Remove the entity paired to the specified key.
- bool **changeItemKey** (DataKeyType oldKey, DataKeyType newKey, DataHolder *items=nullptr)
Modify an existing key.
- bool **setArrayValue** (DataKeyType key, DataValueType newValue, IndexType iRow=0, IndexType iColumn=0)
Set an array value with the specified indices.
- DataValueType **arrayValue** (DataKeyType key, IndexType iRow=0, IndexType iColumn=0)
Retrieve a value from an array.

- `std::vector< DataKeyType > keys () const`
Retrieve all the keys.
- `quint32 numberItems () const`
- `DataHolder const & getItems ()`
- `DataIDType id () const`
- `ObjectType type () const`
- `QString const & name () const`
- `void setName (QString const &name)`
- `virtual void serialize (QDataStream &stream) const`
Serialize an abstract data object.
- `virtual void deserialize (QDataStream &stream)`
Partly deserialize an abstract data object.
- `virtual void import (QTextStream &stream)=0`
- `void write (QTextStream &stream) const`
Write an abstract data object to a file.

Static Public Member Functions

- `static DataIDType maxObjectID ()`
- `static void setMaxObjectID (DataIDType iMaxObjectID)`

Protected Attributes

- `const ObjectType mkType`
- `QString mName`
- `DataIDType mID`
- `DataHolder mItems`

Static Private Attributes

- `static DataIDType smMaxObjectID = 0`

Friends

- `QDataStream & operator<< (QDataStream &stream, AbstractDataObject const &obj)`
Print a data object to a binary stream.

4.1.1 Detailed Description

Data object which is designed in the way to be represented in a table easily.

4.1.2 Member Function Documentation

4.1.2.1 addItem()

```
virtual DataType & RSE::Core::AbstractDataObject::addItem (
    DataKeyType key ) [pure virtual]
```

Implemented in [RSE::Core::ScalarDataObject](#), and [RSE::Core::VectorDataObject](#).

4.1.2.2 clone()

```
virtual AbstractDataObject * RSE::Core::AbstractDataObject::clone ( ) const [pure virtual]
```

Implemented in [RSE::Core::ScalarDataObject](#), and [RSE::Core::VectorDataObject](#).

4.1.2.3 deserialize()

```
void AbstractDataObject::deserialize (
    QDataStream & stream ) [virtual]
```

Partly deserialize an abstract data object.

It is assumed that a type and name have already been assigned. So, only an identifier and items need to be set.

4.1.2.4 import()

```
virtual void RSE::Core::AbstractDataObject::import (
    QTextStream & stream ) [pure virtual]
```


Implemented in [RSE::Core::ScalarDataObject](#), and [RSE::Core::VectorDataObject](#).

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/abstractdataobject.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/abstractdataobject.cpp](#)

4.2 RSE::Viewers::AbstractGraphData Class Reference

Inheritance diagram for RSE::Viewers::AbstractGraphData:



Public Types

- enum **Category** {
 cSpaceTime , **cKinematics** , **cForce** , **cEnergy** ,
 cModal , **cEstimation** }
- enum **Direction** { **dFirst** , **dSecond** , **dThird** , **dFull** }

Public Member Functions

- **AbstractGraphData** (Category category, Direction direction)
- virtual GraphDataset **getDataset** ([KLP::FrameCollection](#) const &collection, qint64 sliceIndex=-1) const =0
- virtual int **type** () const =0
- Category **category** () const
- Direction **direction** () const

Protected Member Functions

- GraphDataset **getAbsoluteData** ([KLP::FloatFrameObject](#) const components[], qint64 iStart, qint64 iEnd) const
 Compute the module of specified components.
- GraphDataset **sliceByIndex** ([KLP::FloatFrameObject](#) const &component, qint64 index) const
- GraphDataset **sliceByDirectionAndIndex** ([KLP::FloatFrameObject](#) const components[], Direction direction, qint64 index) const
 Slice data through the specified direction and index.

Protected Attributes

- Category **mCategory**
- Direction **mDirection**

4.2.1 Member Function Documentation

4.2.1.1 getDataset()

```
virtual GraphDataset RSE::Viewers::AbstractGraphData::getDataset (
    KLP::FrameCollection const & collection,
    qint64 sliceIndex = -1 ) const [pure virtual]
```

Implemented in [RSE::Viewers::EnergyGraphData](#), [RSE::Viewers::EstimationGraphData](#), [RSE::Viewers::KinematicsGraphData](#), and [RSE::Viewers::SpaceTimeGraphData](#).

4.2.1.2 sliceByIndex()

```
GraphDataset AbstractGraphData::sliceByIndex (
    KLP::FloatFrameObject const & component,
    quint64 index ) const [protected]
```

Slice data by index

Returns

if index is positive, return the value located at the specified index. Otherwise, return the full set of values

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[abstractgraphdata.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[abstractgraphdata.cpp](#)

4.3 RSE::Core::Array< T > Class Template Reference

Numerical array class.

```
#include <array.h>
```

Classes

- class [Row](#)
Proxy class to acquire a row by index.

Public Member Functions

- **Array** (IndexType numRows=0, IndexType numCols=0)
- **Array** ([Array](#)< T > const &another)
Copy constructor.
- **Array** ([Array](#)< T > &&another)
Move constructor.
- T * **data** ()
- void **resize** (IndexType numRows, IndexType numCols)
Resize and copy previous values if possible.
- void **removeColumn** (IndexType iRemoveColumn)
Remove a column by index.
- void **swapColumns** (IndexType iFirstColumn, IndexType iSecondColumn)
Swap two columns.
- void **clear** ()
Remove all the values.
- IndexType **rows** () const
- IndexType **cols** () const
- IndexType **size** () const
- [Row](#)< T > **operator[]** (IndexType iRow)
- [Row](#)< T > **operator[]** (IndexType iRow) const
- [Array](#) & **operator=** ([Array](#)< T > const &another)
Assignment operator.

Private Attributes

- IndexType **mNumRows**
Number of rows.
- IndexType **mNumCols**
Number of columns.
- T * **mpData** = nullptr
Pointer to the data stored.

Friends

- template<typename K >
QDebug **operator**<< (QDebug stream, [Array](#)< K > &array)
Print all array values using the matrix format.
- template<typename K >
QDataStream & **operator**<< (QDataStream &stream, [Array](#)< K > const &array)
Write an array to a binary stream.
- template<typename K >
QDataStream & **operator**>> (QDataStream &stream, [Array](#)< K > &array)
Read an array from a stream.
- template<typename K >
QDataStream & **operator**<< (QDataStream &stream, [Array](#)< K > const &array)
Write an array to a text stream.

4.3.1 Detailed Description

```
template<typename T>
class RSE::Core::Array< T >
```

Numerical array class.

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/array.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/array.cpp](#)

4.4 RSE::Core::Cable Struct Reference

Mechanical properties of a cable.

```
#include <databasecables.h>
```

Public Attributes

- `std::string` **name**
Name of a cable.
- `double` **bendingStiffness**
Bending stiffness, N.
- `double` **torsionalStiffness**
Torsional stiffness, N.
- `double` **massPerLength**
Mass per length, kg/m.
- `double` **youngsModulus**
Youngs modulus, Pa.
- `double` **area**
Area of a cross-section, m^2 .

4.4.1 Detailed Description

Mechanical properties of a cable.

The documentation for this struct was generated from the following file:


- `/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.h`

4.5 RSE::Viewers::ConvergenceViewer Class Reference

Class to represent convergence of viscosities.

```
#include <convergenceviewer.h>
```

Inheritance diagram for RSE::Viewers::ConvergenceViewer:



Public Member Functions

- **ConvergenceViewer** (QString const &pathFile, QWidget *pParent=nullptr)
- `void` **plot** ()
Represent the convergence.

Private Member Functions

- `void` **initialize** ()
Initialize the widget.
- `bool` **read** ()
Read the file contained viscosities of dampers.

Private Attributes

- QString const **mkPathFile**
- QCustomPlot * **mpFigure**
- QStringList **mStandardColorNames**
- QVector< QCPScatterStyle::ScatterShape > **mStandardShapes**
- QVector< int > **mCalcModes**
- [Core::Array](#)< double > **mDampingValues**

4.5.1 Detailed Description

Class to represent convergence of viscosities.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[convergenceviewer.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[convergenceviewer.cpp](#)

4.6 RSE::Core::Damper Class Reference

Class to compute and collect properties of a damper.

```
#include <damper.h>
```

Public Member Functions

- **Damper** (double massCable, double massLoadedCable, double workingLength, double bouncerLength, double springLength=0, double springStiffness=0)
- double **massCable** () const
- double **massLoadedCable** () const
- double **workingLength** () const
- double **bouncerLength** () const
- double **springLength** () const
- double **springStiffness** () const
- void **setMassCable** (double massCable)
- void **setMassLoadedCable** (double massLoadedCable)
- void **setWorkingLength** (double workingLength)
- void **setBouncerLength** (double bouncerLength)
- void **setSpringLength** (double springLength)
- void **setSpringStiffness** (double springStiffness)
- void **computeSpring** ()

Compute parameters of a spring belonged to a damper.

Private Attributes

- double **mMassCable**
Mass of a cable, kg.
- double **mMassLoadedCable**
Mass of a cable with ice on it, kg.
- double **mWorkingLength**
Working length, m.
- double **mBouncerLength**
Length of a bouncer, m.
- double **mSpringLength** = 0.0
Length of a spring, m.
- double **mSpringStiffness** = 0.0
Spring stiffness, N/m.

4.6.1 Detailed Description

Class to compute and collect properties of a damper.

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/damper.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/damper.cpp](#)

4.7 RSE::Core::DataBaseCables Class Reference

Aggregate data of cables.

```
#include <databasecables.h>
```

Public Member Functions

- **DataBaseCables** (QString const &directory, QString const &fileName)
- std::vector< std::string > **names** () const
Names of available cables.
- [Cable](#) const & **getItem** (std::string const &name) const

Private Member Functions

- bool **readDataBase** (QString const &pathFile)
Read a database from a file.

Private Attributes

- std::unordered_map< std::string, [Cable](#) > **mData**

4.7.1 Detailed Description

Aggregate data of cables.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.cpp>

4.8 RSE::Models::DoubleSpinBoxItemDelegate Class Reference

Class to specify how table values can be edited.

```
#include <doublespinboxitemdelegate.h>
```

Inheritance diagram for RSE::Models::DoubleSpinBoxItemDelegate:



Public Member Functions

- **DoubleSpinBoxItemDelegate** (QObject *parent=nullptr)
- QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Create a double value editor.
- void **setEditorData** (QWidget *pEditor, const QModelIndex &index) const override
Specify data to show.
- void **setModelData** (QWidget *pEditor, QAbstractItemModel *pModel, const QModelIndex &index) const override
Set data to a model.
- void **updateEditorGeometry** (QWidget *pEditor, const QStyleOptionViewItem &option, const QModelIndex &index) const override
Set a geometry to render.

4.8.1 Detailed Description

Class to specify how table values can be edited.

The documentation for this class was generated from the following files:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.cpp>

4.9 KLP::EnergyFrame Struct Reference

Energy quantities associated with a frame.

```
#include <framecollection.h>
```

Public Attributes

- [FloatFrameObject](#) **kinetic**
- [FloatFrameObject](#) **potential**
- [FloatFrameObject](#) **full**

4.9.1 Detailed Description

Energy quantities associated with a frame.

The documentation for this struct was generated from the following file:


- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h>

4.10 RSE::Viewers::EnergyGraphData Class Reference

Class to deal with energy entities of KLP-data.

```
#include <energygraphdata.h>
```

Inheritance diagram for RSE::Viewers::EnergyGraphData:

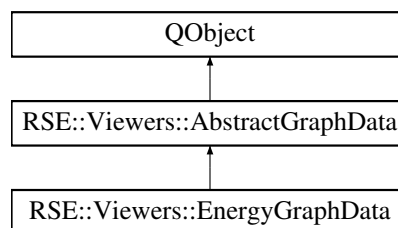

Public Types

- enum **EnergyType** { **enKinetic** , **enPotential** , **enFull** }

Public Member Functions

- **EnergyGraphData** (EnergyType type, Direction direction=Direction::dFull)
- GraphDataset [getDataset](#) ([KLP::FrameCollection](#) const &collection, quint64 sliceIndex) const override
Retrieve the data of the specified type and direction from a given frame.
- int [type](#) () const override

Private Attributes

- EnergyType **mType**

Additional Inherited Members

4.10.1 Detailed Description

Class to deal with energy entities of KLP-data.

4.10.2 Member Function Documentation

4.10.2.1 getDataset()

```
GraphDataset EnergyGraphData::getDataset (
    KLP::FrameCollection const & collection,
    qint64 sliceIndex ) const [override], [virtual]
```

Retrieve the data of the specified type and direction from a given frame.

Implements [RSE::Viewers::AbstractGraphData](#).

4.10.2.2 type()

```
int RSE::Viewers::EnergyGraphData::type ( ) const [inline], [override], [virtual]
```

Implements [RSE::Viewers::AbstractGraphData](#).

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/energygraphdata.cpp](#)

4.11 RSE::Viewers::EstimationGraphData Class Reference

Class to estimate errors of entities in KLP-data.

```
#include <estimationgraphdata.h>
```

Inheritance diagram for RSE::Viewers::EstimationGraphData:

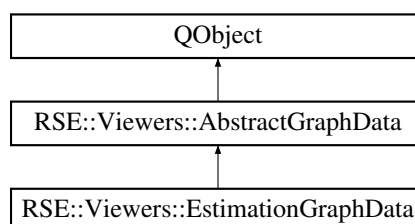

Public Types

- enum **EstimationType** { **esDisplacement** , **esRotation** , **esForce** , **esMoment** }

Public Member Functions

- **EstimationGraphData** (EstimationType type, Direction direction=Direction::dFull)
- GraphDataset **getDataset** ([KLP::FrameCollection](#) const &collection, quint64 sliceIndex) const override
Retrieve the data of the specified type and direction from a given frame.
- int **type** () const override

Private Attributes

- EstimationType **mType**

Additional Inherited Members

4.11.1 Detailed Description

Class to estimate errors of entities in KLP-data.

4.11.2 Member Function Documentation

4.11.2.1 getDataset()

```
GraphDataset EstimationGraphData::getDataset (
    KLP::FrameCollection const & collection,
    quint64 sliceIndex ) const [override], [virtual]
```

Retrieve the data of the specified type and direction from a given frame.

Implements [RSE::Viewers::AbstractGraphData](#).

4.11.2.2 type()

```
int RSE::Viewers::EstimationGraphData::type ( ) const [inline], [override], [virtual]
```


Implements [RSE::Viewers::AbstractGraphData](#).

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[estimationgraphdata.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[estimationgraphdata.cpp](#)

4.12 RSE::Viewers::ExtendedGraphPlot Class Reference

Inheritance diagram for RSE::Viewers::ExtendedGraphPlot:



Public Member Functions

- **ExtendedGraphPlot** (QWidget *pParent=nullptr)

Protected Member Functions

- void **contextMenuEvent** (QContextMenuEvent *pEvent) override
Show a context menu at the specified position.

Private Member Functions

- void **createActions** ()
Create actions for a context menu.
- void **copyPixmapToClipboard** ()
Copy an image of plotted entities to the clipboard.
- void **savePixmap** ()
Save an image of plotted entities to a file.
- void **refresh** ()
Refresh the widget.

Private Attributes

- QAction * **mpCopyAction**
- QAction * **mpSaveAction**
- QAction * **mpRefreshAction**

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.cpp](#)

4.13 RSE::Viewers::ExtendedSurfaceHandler Class Reference

Class which enables additional actions while working with a 3D-surface.

```
#include <extendedsurfacehandler.h>
```

Inheritance diagram for RSE::Viewers::ExtendedSurfaceHandler:



Public Member Functions

- **ExtendedSurfaceHandler** (Q3DSurface *pSurface, QObject *pParent=nullptr)

Protected Member Functions

- void **mousePressEvent** (QMouseEvent *pEvent, const QPoint &mousePos) override
Wait for the right button to be clicked.

Private Member Functions

- void **createActions** ()
Create actions to deal with images.
- void **showContextMenu** (QPoint const &position)
Show a context menu at the specified position.
- void **copyImageToClipboard** ()
Copy an image of a surface to the clipboard.
- void **saveImage** ()
Save an image of a surface to a file.

Private Attributes

- Q3DSurface * **mpSurface**
- QAction * **mpCopyAction**
- QAction * **mpSaveAction**

4.13.1 Detailed Description

Class which enables additional actions while working with a 3D-surface.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[extendedsurfacehandler.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[extendedsurfacehandler.cpp](#)

4.14 RSE::Viewers::FigureManager Class Reference

Manager to create and select figures of different types: graphs and surfaces.

```
#include <figuremanager.h>
```

Public Member Functions

- **FigureManager** (ads::CDockWidget *pFigureContainer)
- [ExtendedGraphPlot](#) * **graphFigure** ()
- Q3DSurface * **surfaceFigure** ()
- void **clear** ()
Clear all figures.
- void **selectGraphFigure** ()
Select the graph figure as the central one.
- void **selectSurfaceFigure** ()
Select the surface figure as the central one.

Private Member Functions

- void **initializeGraphFigure** ()
Inititalize the widget to plot graphs.
- void **initializeSurfaceFigure** ()
Initialize the widget to plot surfaces.
- void **clearGraphFigure** ()
Clear the widget to plot graphs.
- void **clearSurfaceFigure** ()
Clear the widget to plot surfaces.

Private Attributes

- ads::CDockWidget * **mpFigureContainer**
- [ExtendedGraphPlot](#) * **mpGraphFigure**
- Q3DSurface * **mpSurfaceFigure**
- QWidget * **mpSurfaceFigureContainer**

4.14.1 Detailed Description

Manager to create and select figures of different types: graphs and surfaces.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[figuremanager.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[figuremanager.cpp](#)

4.15 KLP::FrameCollection Struct Reference

Set of all quantities belonged to a frame.

```
#include <framecollection.h>
```

Public Attributes

- **int numRods**
Number of rods.
- **float time**
Time.
- **FloatFrameObject parameter**
Parameter.
- **FloatFrameObject naturalLength**
Natural length.
- **FloatFrameObject accumulatedNaturalLength**
- **FloatFrameObject coordinates** [kNumDirections]
Coordinates.
- **StateFrame state**
Regular state.
- **StateFrame projectedState**
Projected regular state.
- **StateFrame firstDerivativeState**
First-order derivate of the state with respect to time.
- **StateFrame secondDerivativeState**
Second-order derivate of the state with respect to time.
- **StateFrame errorState**
State error.
- **FloatFrameObject strain**
Strain.
- **std::vector< StateFrame > modalStates**
Set of modal states.
- **FloatFrameObject frequencies**
Frequencies.
- **EnergyFrame energy**
Energy.

4.15.1 Detailed Description

Set of all quantities belonged to a frame.

The documentation for this struct was generated from the following file:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h>

4.16 KLP::FrameObject< T > Class Template Reference

Public Types

- using **iterator** = [FrameObjectIterator](#)< T >

Public Member Functions

- **FrameObject** (T const *pData=nullptr, T normFactor=1.0, qint64 size=0, qint64 step=1)
- bool **isEmpty** () const
- qint64 **size** () const
- [iterator](#) **begin** () const
- [iterator](#) **end** () const
- [iterator](#) **operator[]** (int index) const

Private Attributes

- T const * **mpData**
- T **mNormFactor**
- qint64 **mSize**
- qint64 **mStep**

Friends

- template<typename K >
QDebug **operator**<< (QDebug stream, [FrameObject](#)< K > const &frameObject)

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[frameobject.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[frameobject.cpp](#)

4.17 KLP::FrameObjectIterator< T > Class Template Reference

Class to iterate through data of a record.

```
#include <frameobjectiterator.h>
```

Public Types

- using **self_type** = [FrameObjectIterator](#)< T >
- using **iterator_category** = std::random_access_iterator_tag
- using **difference_type** = std::ptrdiff_t
- using **value_type** = T
- using **pointer** = T const *
- using **reference** = T const &

Public Member Functions

- **FrameObjectIterator** (pointer pData, T normFactor, qint64 step)
- value_type **operator*** ()
- [self_type](#) & **operator++** ()
- [self_type](#) **operator++** (int)
- [self_type](#) **operator+** (const difference_type &movement)
- difference_type **operator-** (const [FrameObjectIterator](#) &another) const

Private Attributes

- pointer **mpData**
- T **mNormFactor**
- qint64 const **mStep**

Friends

- bool **operator==** ([self_type](#) const &first, [self_type](#) const &second)
- bool **operator!=** ([self_type](#) const &first, [self_type](#) const &second)

4.17.1 Detailed Description

```
template<typename T>
class KLP::FrameObjectIterator< T >
```

Class to iterate through data of a record.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[frameobjectiterator.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[frameobjectiterator.cpp](#)

4.18 RSE::Viewers::Graph Class Reference

Public Member Functions

- **Graph** (QString const &name)
- QString const & **name** () const
- GraphIDType **id** () const
- [AbstractGraphData](#) ** **data** ()
- bool **isData** (int iData) const
- bool **isDataSlicer** () const
- [GraphDataSlicer](#) & **dataSlicer** () const
- QVector< int > **indicesUniqueData** () const
Retrieve indices of assigned graph data.
- int **indexTimeData** () const
Retrieve the index of the time data.
- int **indexData** (int iCategory, int iType=-1) const

Retrieve the index of the data of the requested category and type (optional)

- bool **isTimeData** () const
- QCPGraph::LineStyle **lineStyle** () const
- uint **lineWidth** () const
- QColor **color** () const
- QCPScatterStyle::ScatterShape **scatterShape** () const
- double **scatterSize** () const
- QString const & **title** () const
- QStringList const & **axesLabels** () const
- void **setName** (QString const &name)
- void **setData** ([AbstractGraphData](#) *pData, int iData)

Replace directional data with a new one.

- void **setData** ([AbstractGraphData](#) *pXData=nullptr, [AbstractGraphData](#) *pYData=nullptr, [AbstractGraphData](#) *pZData=nullptr)

Specify data for all axes.

- void **eraseData** (int iData)
- bool **createDataSlicer** (GraphDataSlicer::SliceType type, PointerResult pResult)

Create an instance of object to slice one of datasets.

- void **removeDataSlicer** ()

Remove data slicer if created.

- void **setLineStyle** (QCPGraph::LineStyle const &lineStyle)
- void **setLineWidth** (uint lineWidth)
- void **setColor** (QColor const &color)
- void **setScatterShape** (QCPScatterStyle::ScatterShape const &scatterShape)
- void **setScatterSize** (double scatterSize)
- void **setTitle** (QString const &title)
- void **setAxisLabel** (QString const &label, int iData)
- void **setAxesLabels** (QString const &xLabel, QString const &yLabel, QString const &zLabel="")

Static Public Member Functions

- static GraphIDType **maxGraphID** ()

Private Attributes

- QString **mName**
- GraphIDType **mID**
- [AbstractGraphData](#) * **mpData** [KLP::kNumDirections] = {nullptr, nullptr, nullptr}
- [GraphDataSlicer](#) * **mpDataSlicer** = nullptr
- QCPGraph::LineStyle **mLineStyle** = QCPGraph::lsLine
- uint **mLineWidth** = 1
- QColor **mColor** = Qt::blue
- QCPScatterStyle::ScatterShape **mScatterShape** = QCPScatterStyle::ssNone
- double **mScatterSize** = 5
- QString **mTitle**
- QStringList **mAxesLabels** = QStringList({" X", " Y", " Z"})

Static Private Attributes


- static GraphIDType **smMaxGraphID** = 0

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.h
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graph.cpp

4.19 RSE::Viewers::GraphDataSlicer Class Reference

Inheritance diagram for RSE::Viewers::GraphDataSlicer:



Public Types

- enum **SliceType** { **sdX** , **sdY** , **sdZ** }

Public Member Functions

- **GraphDataSlicer** (SliceType type, [AbstractGraphData](#) const *pData, KLP::PointerResult pResult)
- SliceType **type** () const
- qint64 **index** () const
- float **value** () const
- std::pair< qint64, qint64 > **limitsIndices** () const
- std::pair< float, float > **limitsValues** () const
- bool **isTime** () const
- void **setResult** (KLP::PointerResult pResult)
Specify a set of results.
- void **setIndex** (qint64 index)
Determine the boundaries of the dataset.
- float **setClosestValue** (float searchValue)
Find the closest value to the required one in the dataset.

Private Member Functions

- void **setLimits** ()
Specify limits of values and indices for slicing.

Private Attributes


- SliceType const **mType**
- [AbstractGraphData](#) const * **mpData**
- quint64 **mIndex**
- GraphDataset **mDataset**
- std::pair< quint64, quint64 > **mLimitsIndices**
- std::pair< float, float > **mLimitsValues**
- bool **mlsTime**

The documentation for this class was generated from the following files:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/graphdataslicer.cpp>

4.20 RSE::Models::GraphListModel Class Reference

Inheritance diagram for RSE::Models::GraphListModel:



Public Member Functions

- **GraphListModel** (Viewers::MapGraphs &graphs, QObject *pParent=nullptr)
- void **create** ()
Create a new default graph.
- void **updateContent** ()
Create items linked to graphs.
- void **removeSelected** ()
Remove selected graphs.
- void **selectItem** (int iSelect=-1)
Select an item by index.

Private Member Functions

- void **clearContent** ()
Remove all the items created.
- void **renameItem** (QStandardItem *pItem)
Rename a graph after editing.

Private Attributes

- Viewers::MapGraphs & **mGraphs**

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[graphlistmodel.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[graphlistmodel.cpp](#)

4.21 KLP::Index Struct Reference

Structure to navigate through records.

```
#include <index.h>
```

Public Member Functions

- **Index** ()
Base constructor.

Public Attributes

- std::vector< [IndexData](#) > **data**
Data.
- quint64 **recordShift** = 0
Shift of the main record.
- quint64 **relativeDataShift** = 0
Relative shift of data.

4.21.1 Detailed Description

Structure to navigate through records.

The documentation for this struct was generated from the following file:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[index.h](#)

4.22 KLP::IndexData Struct Reference

Data of each record.

```
#include <index.h>
```

Public Attributes

- qint64 **position** = 0
Position of a record in the buffer.
- qint64 **size** = 0
Size of a record.
- qint64 **step** = 1
Step for iterating inside a record.
- qint64 **partSize** = 0
Partial length of a quantity inside a record.

4.22.1 Detailed Description

Data of each record.

The documentation for this struct was generated from the following file:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/index.h>

4.23 RSE::Core::IO Class Reference

Class to save the project and solution data.

```
#include <io.h>
```

Public Member Functions

- **IO** (QString const &lastPath)
- QString const & **lastPath** () const
- QString const & **extension** () const
- void **saveAs** (QString const &pathFile, [Project](#) &project, [Solution::SolutionOptions](#) &options)
Save the project and solution data to a file.
- IOPair **open** (QString const &pathFile, [DataBaseCables](#) const &dataBaseCables)
Read the computational data from a file.

Private Attributes

- const QString **mkProjectExtension** = ".rse"
- QString **mLastPath**

4.23.1 Detailed Description

Class to save the project and solution data.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/io.cpp>

4.24 RSE::Viewers::KinematicsGraphData Class Reference

Class to deal with kinematics of KLP-data.

```
#include <kinematicsgraphdata.h>
```

Inheritance diagram for RSE::Viewers::KinematicsGraphData:

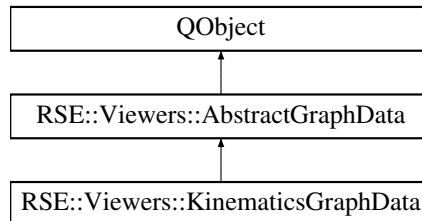

Public Types

- enum **KinematicsType** {
kStrain , **kDisplacement** , **kRotation** , **kSpeed** ,
kAngularSpeed , **kAcceleration** , **kAngularAcceleration** }

Public Member Functions

- KinematicsGraphData** (KinematicsType type, Direction direction=Direction::dFull)
- GraphDataset **getDataset** ([KLP::FrameCollection](#) const &collection, quint64 sliceIndex) const override
Retrieve the data of the specified type and direction from a given frame.
- int **type** () const override

Private Attributes

- KinematicsType **mType**

Additional Inherited Members

4.24.1 Detailed Description

Class to deal with kinematics of KLP-data.

4.24.2 Member Function Documentation

4.24.2.1 `getDataset()`

```
GraphDataset KinematicsGraphData::getDataset (
    KLP::FrameCollection const & collection,
    qint64 sliceIndex ) const [override], [virtual]
```

Retrieve the data of the specified type and direction from a given frame.

Implements [RSE::Viewers::AbstractGraphData](#).

4.24.2.2 `type()`

```
int RSE::Viewers::KinematicsGraphData::type ( ) const [inline], [override], [virtual]
```

Implements [RSE::Viewers::AbstractGraphData](#).

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/kinematicsgraphdata.cpp](#)

4.25 RSE::Viewers::KLPGraphViewer Class Reference

Class to graphically represent content of KLP output files.

```
#include <klpgraphviewer.h>
```

Inheritance diagram for RSE::Viewers::KLPGraphViewer:



Public Member Functions

- **KLPGraphViewer** (QString const &lastPath, QSettings &settings, QWidget *pParent=nullptr)
- void **openResultsDialog** ()
Open results using a file system dialog.
- void **openResults** (QStringList const &locationFiles)
Open a set of results using their locations.
- void **setGraphs** (MapGraphs &&graphs)
Replace the current set of graphs with the new one.
- void **plot** ()
Plot the resulting set of graphs.

Private Member Functions

- void **initialize** ()
Intialize default graphical objects.
- void **createContent** ()
Construct graphical interface.
- ads::CDockWidget * **createResultWidget** ()
Create a widget to open and deal with KLP results.
- ads::CDockWidget * **createFigureWidget** ()
Create a widget to plot graphs and surfaces.
- ads::CDockWidget * **createConstructorWidget** ()
Create a widget to construct graphs.
- ads::CDockWidget * **createPropertyWidget** ()
Create a widget to modify properties of graphs.
- void **processSelectedResults** ()
Process selected results.
- void **showResultInfo** (KLP::ResultInfo const &info)
Show information about the selected result.
- void **processSelectedGraphs** ()
Process selected graphs.
- void **saveSettings** ()
Save settings to a file.
- void **restoreSettings** ()
Restore settings from a file.
- void **closeEvent** (QCloseEvent *pEvent) override
Save settings and delete handling widgets before closing the window.
- void **plotCurve** (PointerGraph const pGraph, PointerResult const pResult, bool isCompareResults)
Represent plottable data as a curve.
- void **plotSurface** (PointerGraph const pGraph, PointerResult const pResult, bool isCompareResults)
Represent plottable data as a surface.

Private Attributes

- QString **mLastPath**
- QSettings & **mSettings**
- ads::CDockManager * **mpDockManager** = nullptr
- [FigureManager](#) * **mpFigureManager** = nullptr
- QListView * **mpListResults**
- QTextEdit * **mpTextInfo**
- QListView * **mpListGraphs**
- [RSE::Viewers::PropertyTreeWidget](#) * **mpPropertyTreeWidget**
- [RSE::Models::ResultListModel](#) * **mpResultListModel**
- [RSE::Models::GraphListModel](#) * **mpGraphListModel**
- KLP::Results **mResults**
- MapGraphs **mGraphs**

4.25.1 Detailed Description

Class to graphically represent content of KLP output files.

The documentation for this class was generated from the following files:


- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.cpp>

4.26 RSE::App::MainWindow Class Reference

Central window of the program.

```
#include <mainwindow.h>
```

Inheritance diagram for RSE::App::MainWindow:



Public Member Functions

- **MainWindow** (QWidget *parent=nullptr)
- void **setMassCable** (double value)
Set mass of a cable.
- void **setMassLoadedCable** (double value)
Set mass of a cable with ice on it.
- void **setWorkingLength** (double value)
Specify working length.
- void **setBouncerLength** (double value)
Set length of a bouncer.
- void **setSpringLength** (double value)
Assign length of a spring.
- void **setSpringStiffness** (double value)
Set spring stiffness of a damper.
- void **setCable** (QString const &name)
Assign cables to a rod system.
- void **setForce** (double value)
Specify stretching force.
- void **setLongitudinalStiffness** (double value)
Specify longitudinal stiffness of all supports.
- void **setVerticalStiffness** (double value)
Specify vertical stiffness of all supports.
- void **createProject** ()
Open a new project.
- void **openProjectDialog** ()
Open a project by means of a dialog window.
- void **openProject** (QString const &pathFile)
Open a project using a path specified.
- void **saveAsProject** ()
Save the project using a dialog window.
- void **saveProject** ()
Save the current project.

Private Slots

- void **saveSettings** ()
Save current graphical settings of floating widgets.
- void **restoreSettings** ()
Read graphical settings from a file.
- void **computeSpring** ()
Compute parameters of a spring.
- void **computeSpans** ()
Compute length of all cables.
- void **runRodSystemSolution** ()
Solve the rod system.
- void **runOptimizationSolution** ()
Optimize viscosities of dampers.
- void **appendOutputData** (QByteArray const &data)
Process the message from the solution process.
- void **showConvergence** ()
Represent the convergence of the optimization process.
- void **showResults** ()
Represent the results obtained via KLPALGSYS.
- void **setProjectTitle** ()
Set the name of a project.
- void **setProjectData** ()
Set project data.
- void **setSolutionOptions** ()
Set the data to be used as the solution parameters.
- void **setCurrentCable** ()
Select a current cable.
- void **setBlockedSignals** (bool)
(Un)Block all the signals from widget
- void **aboutProgram** ()
Show the information about the program.

Private Member Functions

- void **initialize** ()
Set the state and geometry of the central window.
- void **createContent** ()
Create all the widgets and links between them.
- void **createDefaultProject** ()
Create a default project.
- void **createDefaultSolutionOptions** ()
Create default solution options.
- void **closeEvent** (QCloseEvent *pEvent) override
Save settings and parameters of project while closing the central window.
- ads::CDockWidget * **createDamperWidget** ()
Create a widget to specify data of a damper.
- ads::CDockWidget * **createRodSystemWidget** ()
Create a widget to set and control data of a rod system.
- ads::CDockWidget * **createSupportWidget** ()

- *Create a widget to specify data of supports.*
ads::CDockWidget * **createCalculationWidget** ()
- *Create a widget to control the solution process.*
ads::CDockWidget * **createConsole** ()
- *Construct a widget to view solution information.*
void **specifyMenuConnections** ()
- *Specify menu interactions.*

Private Attributes

- Ui::MainWindow * **mpUi**
- ads::CDockManager * **mpDockManager**
- [Models::RodSystemTableModel](#) * **mpRodSystemTableModel**
- [Models::DoubleSpinBoxItemDelegate](#) * **mpDoubleSpinBoxItemDelegate**
- std::shared_ptr< [Viewers::KLPGraphViewer](#) > **mpGraphViewer**
- QDoubleSpinBox * **mpMassCable**
- QDoubleSpinBox * **mpMassLoadedCable**
- QDoubleSpinBox * **mpWorkingLength**
- QDoubleSpinBox * **mpBouncerLength**
- QDoubleSpinBox * **mpSpringLength**
- QDoubleSpinBox * **mpSpringStiffness**
- QComboBox * **mpNameCable**
- QDoubleSpinBox * **mpForce**
- QDoubleSpinBox * **mpLongitudinalStiffness**
- QDoubleSpinBox * **mpVerticalStiffness**
- QSpinBox * **mpNumCalcModes**
- QSpinBox * **mpNumDampModes**
- QSpinBox * **mpStepModes**
- QDoubleSpinBox * **mpTolTrunc**
- QTextEdit * **mpConsole**
- [RSE::Core::Project](#) * **mpProject**
- [RSE::Solution::SolutionManager](#) * **mpSolutionManager**
- [RSE::Solution::SolutionOptions](#) * **mpSolutionOptions**
- [RSE::Core::IO](#) * **mpIO**
- QSharedPointer< QSettings > **mpSettings**

4.26.1 Detailed Description

Central window of the program.

The documentation for this class was generated from the following files:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/mainwindow.h>
- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/mainwindow.cpp>

4.27 RSE::Core::Project Class Reference

Public Member Functions

- **Project** (QString const &name, [DataBaseCables](#) dataBaseCables, [Damper](#) damper, [RodSystem](#) rodSystem, [Support](#) support)
- QString const & **name** () const
- void **setName** (QString const &name)
- [Damper](#) & **damper** ()
- [RodSystem](#) & **rodSystem** ()
- [Support](#) & **support** ()
- [DataBaseCables](#) const & **dataBaseCables** () const
- void **readTemplateData** (QString const &path)
Read template data.
- void **writeCalcData** (QString const &path, [Solution::SolutionOptions](#) const &options)
Write the computational data.

Private Member Functions

- [AbstractDataObject](#) * **addDataObject** (AbstractDataObject::ObjectType type)
Create a data object with the specified type.
- void **importDataObjects** (QString const &path, QString const &fileName)
Import several data objects from a file.
- void **readProjectID** (QString const &path)
Read the identifier of a project.
- void **modifyScalarDataObjects** ()
Modify scalar data objects.
- void **modifyVectorDataObjects** ([Spans](#) const &spans)
Modify vector data objects.
- void **writeDataObjects** (DataObjects const &dataObjects, QString const &path, QString const &fileName)
Write data objects to a file.
- void **writeRods** (QString const &path, QString const &fileName)
Write data of rods.
- void **writeProgram** (QString const &path, QString const &fileName, int numRods, int numCalcModes)
Write data of a program.

Private Attributes

- QString **mName**
Name of a project.
- [Damper](#) **mDamper**
Parameters of a damper.
- [RodSystem](#) **mRodSystem**
Parameters of a rod system.
- [Support](#) **mSupport**
Parameters of supports.
- [DataBaseCables](#) **mDataBaseCables**
Database of cables.
- DataObjects **mScalarDataObjects**

Data objects.

- DataObjects **mVectorDataObjects**
- int **mProjectID**

Project identifier.

- QStringList **mRods**

Content of the file named RODS.

- QStringList **mProgram**

Content of the file name PROG.

Static Private Attributes

- static const QString **skProjectExtension**


Project extension.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/[project.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/[project.cpp](#)

4.28 RSE::Viewers::PropertyTreeWidget Class Reference

Inheritance diagram for RSE::Viewers::PropertyTreeWidget:



Signals

- void **graphChanged** ()

Public Member Functions

- **PropertyTreeWidget** (QWidget *pParent=nullptr)
- void **setSelectedGraph** (PointerGraph pGraph)
Specify the single graph which properties need to be edited.
- void **setSelectedResult** (PointerResult pResult)
Specify the single result to control slicing of data.

Private Member Functions

- void **initialize** ()
Intialize the widget and specify service data.
- void **updateValues** ()
Represent values of properties.
- void **createHierarchy** ()
Create a hierachy of properties: keys and empty values.
- QTreeWidgetItem * **createDirectionalDataItem** (QString const &name)
Create a nested hierarchy of directional items.
- void **createDataSlicerItem** ()
Create a nested hierarchy of items to slice data.
- void **createAxesLabelsItem** ()
Create an item to specify labels for axes.
- void **specifyConnections** ()
Enable widgets to communicate.
- void **setBlockedSignals** (bool flag)
Set the blocked state of all widgets.
- int **currentDataIndex** (int iData, int iChild)
Get current data index.
- QString **currentDataText** (int iData, int iChild)
Get current data text.
- void **setTypeWidget** (int iData)
Represent the type of the given graph data.
- void **setDirectionWidget** (int iData)
Represent the direction of the given graph data.
- void **setColorItem** (QColor const &color)
Set the color of the graph.
- void **resetSlicerWidgetsData** ()
Clear data of widgets associated with the data slicer.
- void **updateSlicerWidgetsData** ()
Specify the data of the widget associated with the slicer.
- void **setBlockedSlicerWidgetsSignals** (bool flag)
Set the enabled state of items to slice data.
- void **assignGraphData** (int iData)
Assign new graph data.
- void **assignVisualProperties** ()
Assign visual properties of current graph.
- void **assignSlicer** ()
Make a new instance of the data slicer or delete the current one.
- void **setSlicerIndex** (qint64 index)
Specify the leading index for slicing.
- void **setSlicerValue** (float value)
Specifiy the leading value for slicing.
- EnumData **getEnumData** (QMetaObject const &metaObject, std::string const &nameEnumerator)
Retrieve translated keys and icons from a meta object.
- void **makeTranslationMap** ()
Specify translations for enum options.

Private Attributes

- PointerGraph **mpGraph** = nullptr
- PointerResult **mpResult** = nullptr
- QList< QTreeWidgetItem * > **mDataItems**
- QTreeWidgetItem * **mpDataSlicerItem**
- QMap< QString, QString > **mEnumTranslator**
- QComboBox * **mpLineStyleWidget**
- QSpinBox * **mpLineWidthWidget**
- QTreeWidgetItem * **mpColorItem**
- QComboBox * **mpScatterShapeWidget**
- QDoubleSpinBox * **mpScatterSizeWidget**
- QLineEdit * **mpTitleWidget**
- QTreeWidgetItem * **mpAxesLabelsItem**

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[propertytreewidget.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[propertytreewidget.cpp](#)

4.29 KLP::Result Class Reference

Class to aggregate all the records.

```
#include <result.h>
```

Public Member Functions

- **Result** (QString const &pathFile)
- bool **isEmpty** () const
- QVector< double > const & **time** () const
- QString const & **pathFile** () const
- QString **name** () const
Retrieve the name of the result file.
- int **numRods** (qint64 iFrame) const
Get the number of rods associated with the requested frame.
- qint64 **numTotalRecords** () const
- qint64 **numTimeRecords** () const
- [ResultInfo](#) **info** () const
Retrieve general information about a result file.
- [FrameCollection](#) **getFrameCollection** (qint64 iFrame) const
Retrieve the collection of the frame objects.
- void **update** ()
Retrieve the updated content from the file.

Private Member Functions

- bool **read** ()
Read all the content of the file.
- void **buildIndex** ()
Construct an object to navigate through records.
- void **setStateFrameData** (StateFrame &state, RecordType type, qint64 iFrame, qint64 iStartData, std::vector< float > const &normFactors) const
Specify state data for each direction.
- FloatFrameObject **getFrameObject** (qint64 iFrame, RecordType type, float normFactor=1.0f, qint64 shift=0) const
Get the object associated with the requested frame.

Private Attributes

- QString const **mkPathFile**
Path to the KLP file.
- QByteArray **mContent**
Content of the file.
- std::vector< Index > **mIndex**
Index of the data buffer.
- qint64 **mNumTotalRecords**
Number of records.
- QVector< double > **mTime**
Time array.
- char **mNumBytesRod**
Number of bytes per rod.

4.29.1 Detailed Description

Class to aggregate all the records.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[result.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[result.cpp](#)

4.30 KLP::ResultInfo Struct Reference

Public Attributes


- QDateTime **creationDateTime**
- qint64 **numTotalRecords** = 0
- qint64 **numTimeRecords** = 0
- uint **fileSize** = 0
- uint **ID** = -1

The documentation for this struct was generated from the following file:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/[result.h](#)

4.31 RSE::Models::ResultListModel Class Reference

Inheritance diagram for RSE::Models::ResultListModel:



Signals

- void **resultsUpdated** ()

Public Member Functions

- **ResultListModel** (KLP::Results &results, QObject *pParent=nullptr)
- void **updateData** ()
Update results from files.
- void **updateContent** ()
Create items linked to results.
- void **removeSelected** ()
Remove selected results.
- void **selectItem** (int iSelect=-1)
Select an item by index.
- QColor **resultColor** (KLP::PointerResult pResult) const

Private Member Functions

- void **clearContent** ()
Remove all the items created.
- QColor **getAvailableColor** ()
Retireve the next available color from the predefined set of colors.
- void **specifyConnections** ()
Enable widgets to communicate.

Private Attributes

- KLP::Results & **mResults**
- QMap< [KLP::Result](#) *, QColor > **mResultColors**

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[resultlistmodel.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/[resultlistmodel.cpp](#)

4.32 RSE::Core::RodSystem Class Reference

Public Member Functions

- **RodSystem** (std::vector< double > distances, [Cable](#) const &cable, double force)
- std::vector< double > const & **distances** () const
- std::string const & **nameCable** () const
- double **force** () const
- int **numRods** () const
- double **massPerLength** () const
- void **setDistances** (std::vector< double > const &distances)
Specify distances between supports.
- void **setCable** ([Cable](#) const &cable)
Modify the cable used in the rod system.
- void **setForce** (double force)
- [Spans](#) **computeSpans** ()
Compute characteristics of spans.

Private Attributes

- [RodSystemParameters](#) **mParameters**
- std::string **mNameCable**

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.h
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.cpp

4.33 RSE::Core::RodSystemParameters Struct Reference

Parameters of a rod system.

```
#include <rodsystem.h>
```

Public Attributes

- std::vector< double > **distances**
Distance between supports, m.
- double **massPerLength**
Mass per length, kg.
- double **youngsModulus**
Youngs modulus, Pa.
- double **area**
Area of a cross-section, m².
- double **force**
Stretching force, N.
- int **numRods** = 0
Number of rods.

4.33.1 Detailed Description

Parameters of a rod system.

The documentation for this struct was generated from the following file:


- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.h>

4.34 RSE::Models::RodSystemTableModel Class Reference

Table model to set and represent data of a rod system.

```
#include <rodsystemtablemodel.h>
```

Inheritance diagram for RSE::Models::RodSystemTableModel:



Signals

- void **modified** ()

Public Member Functions

- **RodSystemTableModel** (QObject *pParent=nullptr)
- void **setRodSystem** ([Core::RodSystem](#) *pRodSystem)
Acquire the pointer to a rod system.
- void **updateContent** ()
Represent all data of a rod system.
- void **insertAfterSelected** ()
Insert fresh rows after selected ones.
- void **removeSelected** ()
Remove the selected rows.

Private Member Functions

- void **clearContent** ()
Remove all the objects created.
- void **setChangedData** (QStandardItem *pltem)
Set the changed distances between supports.

Private Attributes

- [Core::RodSystem](#) * **mpRodSystem** = nullptr

4.34.1 Detailed Description

Table model to set and represent data of a rod system.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/[rodsystemtablemodel.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/[rodsystemtablemodel.cpp](#)

4.35 RSE::Core::Array< T >::Row< U > Class Template Reference

Proxy class to acquire a row by index.

Public Member Functions

- **Row** (T *pData)
- T & **operator[]** (IndexType iCol)
- T const & **operator[]** (IndexType iCol) const
- T * **data** ()

Private Attributes

- T * **mpRow**

4.35.1 Detailed Description

```
template<typename T>
template<typename U>
class RSE::Core::Array< T >::Row< U >
```

Proxy class to acquire a row by index.

The documentation for this class was generated from the following file:


- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/[array.h](#)

4.36 RSE::Core::ScalarDataObject Class Reference

Scalar data object.

```
#include <scalardataobject.h>
```

Inheritance diagram for RSE::Core::ScalarDataObject:

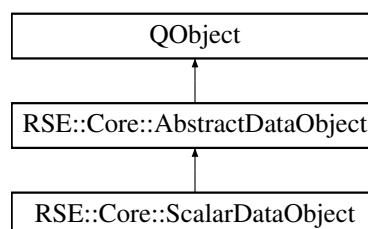

Public Member Functions

- **ScalarDataObject** (QString const &name)
Construct a scalar data object.
- **~ScalarDataObject** ()
Decrease a number of instances while being destroyed.
- **AbstractDataObject** * **clone** () const override
Clone a scalar data object.
- **DataItemType** & **addItem** (DataValueType key) override
Insert a new item into [ScalarDataObject](#).
- void **import** (QTextStream &stream) override
Import a scalar data object from a file.

Static Public Member Functions

- static quint32 **numberInstances** ()

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.36.1 Detailed Description

Scalar data object.

4.36.2 Member Function Documentation

4.36.2.1 addItem()

```
DataItemType & ScalarDataObject::addItem (
    DataValueType key ) [override], [virtual]
```

Insert a new item into [ScalarDataObject](#).

Implements [RSE::Core::AbstractDataObject](#).

4.36.2.2 clone()

```
AbstractDataObject * ScalarDataObject::clone ( ) const [override], [virtual]
```

Clone a scalar data object.

Implements [RSE::Core::AbstractDataObject](#).

4.36.2.3 import()

```
void ScalarDataObject::import (
    QTextStream & stream ) [override], [virtual]
```

Import a scalar data object from a file.

Implements [RSE::Core::AbstractDataObject](#).

The documentation for this class was generated from the following files:


- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.cpp](#)

4.37 RSE::Solution::SolutionManager Class Reference

Class to control the solution process.

```
#include <solutionmanager.h>
```

Inheritance diagram for RSE::Solution::SolutionManager:



Public Slots

- void **stopSolution** ()
Stop the solution process.

Signals

- void **outputSent** (QByteArray)
- void **rodSystemSolved** ()
- void **optimizationSolved** ()
- void **optimizationStepPerformed** ()

Public Member Functions

- **SolutionManager** (QString const &rootPath, QString const &relativeInputPath, QString const &relativeOutputPath)
- void **solveRodSystem** (Core::Project &project, SolutionOptions const &options)
Solve a rod system.
- void **solveOptimization** (Core::Project &project, SolutionOptions const &options)
Optimize viscosities of dampers as to damp selected set of modes.
- void **runVisualizer** ()
Run the visualizer of a rod system.

Private Member Functions

- void **processRodSystemStream** ()
Process the output of the rod system solver.
- void **processOptimizationStream** ()
Process the optimization output.
- void **runParserProcess** ()
Prepare data for the optimization process.
- void **writeOptimizationInput** (QString const &pathFile, int numDampers, SolutionOptions const &options)
Write the input data for optimization of viscosities.
- int **getRodSystemStatus** ()
Check if the solution process if finished.

Private Attributes

- QString **mRootPath**
- QString **mInputPath**
- QString **mOutputPath**
- QProcess * **mpRodSystemSolver** = nullptr
- QProcess * **mpOptimizationSolver** = nullptr

4.37.1 Detailed Description

Class to control the solution process.

The documentation for this class was generated from the following files:

- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.h
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.cpp

4.38 RSE::Solution::SolutionOptions Class Reference

Public Member Functions

- **SolutionOptions** (int numCalcModes, int numDampModes, int stepModes, double tolTrunc)
- int **numCalcModes** () const
- int **numDampModes** () const
- int **stepModes** () const
- double **tolTrunc** () const
- void **setNumCalcModes** (int numCalcModes)
- void **setNumDampModes** (int numDampModes)
- void **setStepModes** (int stepModes)
- void **setTolTrunc** (double tolTrunc)

Private Attributes

- int **mNumCalcModes**
Number of computational modes.
- int **mNumDampModes**
Number of modes to be damped.
- int **mStepModes**
Step through computational modes.
- double **mToITrunc**
Limit to truncate computational modes.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/[solutionoptions.h](#)
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/[solutionoptions.cpp](#)

4.39 RSE::Viewers::SpaceTimeGraphData Class Reference

Class to deal with spacetime KLP-data.

```
#include <spacetimegraphdata.h>
```

Inheritance diagram for RSE::Viewers::SpaceTimeGraphData:

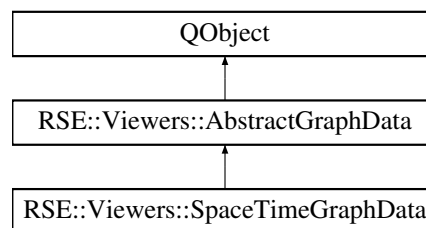

Public Types

- enum **SpaceTimeType** {
 stTime , **stParameter** , **stNaturalLength** , **stAccumulatedNaturalLength** ,
 stCoordinate }

Public Member Functions

- **SpaceTimeGraphData** (SpaceTimeType type, Direction direction=Direction::dFull)
- GraphDataset [getDataset](#) ([KLP::FrameCollection](#) const &collection, qint64 sliceIndex) const override
Retrieve the data of the specified type and direction from a given frame.
- int [type](#) () const override

Private Attributes

- SpaceTimeType **mType**

Additional Inherited Members

4.39.1 Detailed Description

Class to deal with spacetime KLP-data.

4.39.2 Member Function Documentation

4.39.2.1 `getDataset()`

```
GraphDataset SpaceTimeGraphData::getDataset (
    KLP::FrameCollection const & collection,
    qint64 sliceIndex ) const [override], [virtual]
```

Retrieve the data of the specified type and direction from a given frame.

Implements [RSE::Viewers::AbstractGraphData](#).

4.39.2.2 `type()`

```
int RSE::Viewers::SpaceTimeGraphData::type ( ) const [inline], [override], [virtual]
```

Implements [RSE::Viewers::AbstractGraphData](#).

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/spacetimegraphdata.cpp](#)

4.40 RSE::Core::Spans Struct Reference

Computed parameters of spans.

```
#include <rodsystem.h>
```

Public Member Functions

- **Spans** (int numRods)

Public Attributes

- `std::vector< double > u0`
Constant at the left end.
- `std::vector< double > uL`
Constant at the right end.
- `std::vector< double > L`
Length of a rod, m .
- `double projectedForce`
Projected stretching force, N .

4.40.1 Detailed Description

Computed parameters of spans.

The documentation for this struct was generated from the following file:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.h>

4.41 KLP::StateFrame Struct Reference

Kinematic and dynamic quantities associated with a frame.

```
#include <framecollection.h>
```

Public Attributes

- [FloatFrameObject](#) **displacements** [kNumDirections]
- [FloatFrameObject](#) **rotations** [kNumDirections]
- [FloatFrameObject](#) **forces** [kNumDirections]
- [FloatFrameObject](#) **moments** [kNumDirections]

4.41.1 Detailed Description

Kinematic and dynamic quantities associated with a frame.

The documentation for this struct was generated from the following file:

- </home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h>

4.42 RSE::Core::Support Class Reference

Class to aggregate data of supports.

```
#include <support.h>
```

Public Member Functions

- **Support** (double longitudinalStiffness, double verticalStiffness)
- double **longitudinalStiffness** () const
- double **verticalStiffness** () const
- void **setLongitudinalStiffness** (double longitudinalStiffness)
- void **setVerticalStiffness** (double verticalStiffness)

Private Attributes

- double **mLongitudinalStiffness**
Longitudinal stiffness (1), N/m.
- double **mVerticalStiffness**
Vertical stiffness (2), N/m.

4.42.1 Detailed Description

Class to aggregate data of supports.

The documentation for this class was generated from the following files:


- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.h
- /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/support.cpp

4.43 RSE::Core::VectorDataObject Class Reference

Vector data object.

```
#include <vectordataobject.h>
```

Inheritance diagram for RSE::Core::VectorDataObject:

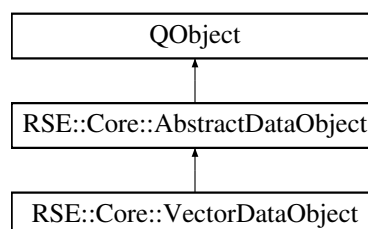

Public Member Functions

- **VectorDataObject** (QString const &name)
Construct a vector data object.
- **~VectorDataObject** ()
Decrease a number of instances while being destroyed.
- **AbstractDataObject * clone** () const override
Clone a vector data object.
- **DataItemType & addItem** (DataValueType key) override
Insert a new item into [VectorDataObject](#).
- void **import** (QTextStream &stream) override
Import a vector data object from a file.

Static Public Member Functions

- static quint32 **numberInstances** ()

Static Private Attributes

- static quint32 **smNumInstances** = 0

Additional Inherited Members

4.43.1 Detailed Description

Vector data object.

4.43.2 Member Function Documentation

4.43.2.1 addItem()

```
DataItemType & VectorDataObject::addItem (
    DataValueType key ) [override], [virtual]
```

Insert a new item into [VectorDataObject](#).

Implements [RSE::Core::AbstractDataObject](#).

4.43.2.2 clone()

```
AbstractDataObject * VectorDataObject::clone ( ) const [override], [virtual]
```

Clone a vector data object.

Implements [RSE::Core::AbstractDataObject](#).

4.43.2.3 import()

```
void VectorDataObject::import (
    QTextStream & stream ) [override], [virtual]
```

Import a vector data object from a file.

Implements [RSE::Core::AbstractDataObject](#).

The documentation for this class was generated from the following files:

- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.h](#)
- [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/vectordataobject.cpp](#)

Chapter 5

File Documentation

5.1 [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.cpp](#) File Reference

DoubleSpinBoxItemDelegate.

```
#include <QDoubleSpinBox>
#include "doublespinboxitemdelegate.h"
```

5.1.1 Detailed Description

DoubleSpinBoxItemDelegate.

Author

Date

2022

5.2 [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/doublespinboxitemdelegate.h](#) File Reference

DoubleSpinBoxItemDelegate.

```
#include <QStyledItemDelegate>
```

Classes

- class [RSE::Models::DoubleSpinBoxItemDelegate](#)
Class to specify how table values can be edited.

5.2.1 Detailed Description

DoubleSpinBoxItemDelegate.

Author

Date

2022

5.3 doublespinboxitemdelegate.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef DOUBLESPINBOXITEMDELEGATE_H
9 #define DOUBLESPINBOXITEMDELEGATE_H
10
11 #include <QStyledItemDelegate>
12
13 namespace RSE::Models
14 {
15
16
17 class DoubleSpinBoxItemDelegate : public QStyledItemDelegate
18 {
19 public:
20     DoubleSpinBoxItemDelegate(QObject* parent = nullptr);
21     QWidget* createEditor(QWidget* parent, const QStyleOptionViewItem& option, const QModelIndex& index)
22         const override;
23     void setEditorData(QWidget* pEditor, const QModelIndex& index) const override;
24     void setModelData(QWidget* pEditor, QAbstractItemModel* pModel, const QModelIndex& index) const
25         override;
26     void updateEditorGeometry(QWidget* pEditor, const QStyleOptionViewItem& option, const QModelIndex&
27         index) const override;
28 };
29 #endif // DOUBLESPINBOXITEMDELEGATE_H

```

5.4 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/central/mainwindow.cpp File Reference

Definition of the MainWindow class.

```

#include <QVBoxLayout>
#include <QGridLayout>
#include <QLabel>
#include <QTextEdit>
#include <QDoubleSpinBox>
#include <QSpinBox>
#include <QSpacerItem>
#include <QSettings>
#include <QTableView>
#include <QHeaderView>
#include <QToolBar>
#include <QComboBox>
#include <QFileDialog>
#include <QMessageBox>

```

```

#include "DockManager.h"
#include "DockWidget.h"
#include "DockAreaWidget.h"
#include "ads_globals.h"
#include "mainwindow.h"
#include "ui_mainwindow.h"
#include "uiconstants.h"
#include "rodsystemtablemodel.h"
#include "doublespinboxitemdelegate.h"
#include "core/project.h"
#include "core/solutionoptions.h"
#include "core/solutionmanager.h"
#include "core/io.h"
#include "viewers/convergenceviewer.h"
#include "viewers/klpgraphviewer.h"

```

Functions

- QDoubleSpinBox * **createDoubleField** (double value, double maxValue=1e3, int numDecimals=3)
Create a field to input a floating-point number.
- QSpinBox * **createIntegerField** (int value, int maxValue=1000)
Create a field to input an integer.

5.4.1 Detailed Description

Definition of the MainWindow class.

Author

Pavel Lakiza

Date

July 2022

5.5 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/central/mainwindow.h File Reference

Declaration of the MainWindow class.

```
#include <QMainWindow>
```

Classes

- class [RSE::App::MainWindow](#)
Central window of the program.

5.5.1 Detailed Description

Declaration of the MainWindow class.

Author

Pavel Lakiza

Date

July 2022

5.6 mainwindow.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef MAINWINDOW_H
4 #define MAINWINDOW_H
5
6 #include <QMainWindow>
7
8 QT_BEGIN_NAMESPACE
9 namespace Ui
10 {
11     class MainWindow;
12 }
13
14 class QSettings;
15 class QDoubleSpinBox;
16 class QSpinBox;
17 class QTableView;
18 class QTextEdit;
19 class QProcess;
20 class QComboBox;
21 QT_END_NAMESPACE
22
23 namespace ads
24 {
25     class CDockManager;
26     class CDockWidget;
27 }
28
29 namespace RSE
30 {
31 }
32
33 namespace Core
34 {
35     class Project;
36     class IO;
37 }
38
39 namespace Solution
40 {
41     class SolutionManager;
42     class SolutionOptions;
43 }
44
45 namespace Models
46 {
47     class RodSystemTableModel;
48     class DoubleSpinBoxItemDelegate;
49 }
50
51 namespace Viewers
52 {
53     class KLPGraphViewer;
54 }
55
56 namespace App
57 {
58     class MainWindow : public QMainWindow
59     {
60     Q_OBJECT
61
62     public:
```



```

68     MainWindow(QWidget* parent = nullptr);
69     ~MainWindow();
70     // Set parameters of a damper
71     void setMassCable(double value);
72     void setMassLoadedCable(double value);
73     void setWorkingLength(double value);
74     void setBouncerLength(double value);
75     void setSpringLength(double value);
76     void setSpringStiffness(double value);
77     // Set parameters of a rod system
78     void setCable(QString const& name);
79     void setForce(double value);
80     // Set parameters of supports
81     void setLongitudinalStiffness(double value);
82     void setVerticalStiffness(double value);
83     // Deal with projects
84     void createProject();
85     void openProjectDialog();
86     void openProject(QString const& pathFile);
87     void saveAsProject();
88     void saveProject();
89
90 private:
91     // Content
92     void initialize();
93     void createContent();
94     void createDefaultProject();
95     void createDefaultSolutionOptions();
96     void closeEvent(QCloseEvent* pEvent) override;
97     ads::CDockWidget* createDamperWidget();
98     ads::CDockWidget* createRodSystemWidget();
99     ads::CDockWidget* createSupportWidget();
100    ads::CDockWidget* createCalculationWidget();
101    ads::CDockWidget* createConsole();
102    // Signals & Slots
103    void specifyMenuConnections();
104
105 private slots:
106     // Settings
107     void saveSettings();
108     void restoreSettings();
109     // Recompute
110     void computeSpring();
111     void computeSpans();
112     // Controlling the solution process
113     void runRodSystemSolution();
114     void runOptimizationSolution();
115     void appendOutputData(QByteArray const& data);
116     void showConvergence();
117     void showResults();
118     // Set project data
119     void setProjectTitle();
120     void setProjectData();
121     void setSolutionOptions();
122     void setCurrentCable();
123     void setBlockedSignals(bool);
124     void aboutProgram();
125
126 private:
127     // GUI
128     Ui::MainWindow* mpUi;
129     ads::CDockManager* mpDockManager;
130     Models::RodSystemTableModel* mpRodSystemTableModel;
131     Models::DoubleSpinBoxItemDelegate* mpDoubleSpinBoxItemDelegate;
132     std::shared_ptr<Viewers::KLPGraphViewer> mpGraphViewer;
133     // Parameters of a damper
134     QDoubleSpinBox* mpMassCable;
135     QDoubleSpinBox* mpMassLoadedCable;
136     QDoubleSpinBox* mpWorkingLength;
137     QDoubleSpinBox* mpBouncerLength;
138     QDoubleSpinBox* mpSpringLength;
139     QDoubleSpinBox* mpSpringStiffness;
140     // Parameters of a rod system
141     QComboBox* mpNameCable;
142     QDoubleSpinBox* mpForce;
143     // Parameters of supports
144     QDoubleSpinBox* mpLongitudinalStiffness;
145     QDoubleSpinBox* mpVerticalStiffness;
146     // Options of computational process
147     QSpinBox* mpNumCalcModes;
148     QSpinBox* mpNumDampModes;
149     QSpinBox* mpStepModes;
150     QDoubleSpinBox* mpTolTrunc;
151     QTextEdit* mpConsole;
152     // Project
153     RSE::Core::Project* mpProject;
154     RSE::Solution::SolutionManager* mpSolutionManager;

```

```

155     RSE::Solution::SolutionOptions* mpSolutionOptions;
156     RSE::Core::IO* mpIO;
157     // Settings
158     QSharedPointer<QSettings> mpSettings;
159 };
160
161 }
162
163 }
164
165 #endif // MAINWINDOW_H

```

5.7 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/central/rodsystemtablemodel.cpp File Reference

Definition of the RodSystemTableModel class.

```

#include <QTableView>
#include "rodsystemtablemodel.h"
#include "core/rodsystem.h"

```

5.7.1 Detailed Description

Definition of the RodSystemTableModel class.

Author

Pavel Lakiza

Date

July 2022

5.8 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/central/rodsystemtablemodel.h File Reference

Declaration of the RodSystemTableModel class.

```

#include <QStandardItemModel>

```

Classes

- class [RSE::Models::RodSystemTableModel](#)
Table model to set and represent data of a rod system.

5.8.1 Detailed Description

Declaration of the RodSystemTableModel class.

Author

Pavel Lakiza

Date

July 2022

5.9 rodsystemtablemodel.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef RODSYSTEMTABLEMODEL_H
9 #define RODSYSTEMTABLEMODEL_H
10
11 #include <QStandardItemModel>
12
13 namespace RSE
14 {
15
16 namespace Core
17 {
18 class RodSystem;
19 }
20
21 namespace Models
22 {
23
24
25 class RodSystemTableModel : public QStandardItemModel
26 {
27     Q_OBJECT
28
29 public:
30     RodSystemTableModel(QObject* pParent = nullptr);
31     ~RodSystemTableModel() = default;
32     void setRodSystem(Core::RodSystem* pRodSystem);
33     void updateContent();
34     void insertAfterSelected();
35     void removeSelected();
36
37 signals:
38     void modified();
39
40 private:
41     void clearContent();
42     void setChangedData(QStandardItem* pItem);
43
44 private:
45     Core::RodSystem* mpRodSystem = nullptr;
46 };
47
48 }
49
50 }
51
52
53
54 #endif // RODSYSTEMTABLEMODEL_H

```

5.10 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/central/uiconstants.h File Reference

Graphical constants shared between several widgets.

```
#include <QString>
```

Variables

- `const QString RSE::UiConstants::Settings::skGeometry = "geometry"`
- `const QString RSE::UiConstants::Settings::skState = "state"`
- `const QString RSE::UiConstants::Settings::skDockingState = "dockingState"`

5.10.1 Detailed Description

Graphical constants shared between several widgets.

Author

Pavel Lakiza

Date

July 2022

5.11 uiconstants.h

[Go to the documentation of this file.](#)

```

1
8 #ifndef UICONSTANTS_H
9 #define UICONSTANTS_H
10
11 #include <QString>
12
13 namespace RSE::UiConstants
14 {
15
16 namespace Settings
17 {
18     const QString skGeometry      = "geometry";
19     const QString skState         = "state";
20     const QString skDockingState = "dockingState";
21 }
22
23 }
24
25 #endif // UICONSTANTS_H

```

5.12 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/abstractdataobject.cpp File Reference

Implementation of the AbstractDataObject class.

```

#include "abstractdataobject.h"
#include "constants.h"

```

5.12.1 Detailed Description

Implementation of the AbstractDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.13 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/abstractdataobject.h File Reference

Declaration of the AbstractDataObject class.

```
#include <QObject>
#include <QString>
#include <QDataStream>
#include <map>
#include "array.h"
#include "aliasdata.h"
```

Classes

- class [RSE::Core::AbstractDataObject](#)
Data object which is designed in the way to be represented in a table easily.

Typedefs

- using **RSE::Core::DataItemType** = Array< DataValueType >
- using **RSE::Core::DataHolder** = std::multimap< DataKeyType, DataItemType >

Functions

- QDataStream & **RSE::Core::operator<<** (QDataStream &stream, AbstractDataObject const &obj)
Print a data object to a binary stream.

5.13.1 Detailed Description

Declaration of the AbstractDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.14 abstractdataobject.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ABSTRACTDATAOBJECT_H
9 #define ABSTRACTDATAOBJECT_H
10
11 #include <QObject>
12 #include <QString>
13 #include <QDataStream>
14 #include <map>
15 #include "array.h"
16 #include "aliasdata.h"
17
18 namespace RSE::Core
19 {
20
21 using DataItemType = Array<DataValueType>;
22 using DataHolder = std::multimap<DataKeyType, DataItemType>;
23
24 class AbstractDataObject : public QObject
25 {
26 public:
27     enum ObjectType
28     {
29         kScalar,
30         kVector,
31         kMatrix,
32         kSurface
33     };
34     AbstractDataObject(ObjectType type, QString const& name);
35     virtual ~AbstractDataObject() = 0;
36     virtual AbstractDataObject* clone() const = 0;
37     virtual DataItemType& addItem(DataKeyType key) = 0;
38     void removeItem(DataValueType key);
39     bool changeItemKey(DataKeyType oldKey, DataKeyType newKey, DataHolder* items = nullptr);
40     bool setArrayValue(DataKeyType key, DataValueType newValue, IndexType iRow = 0, IndexType iColumn = 0);
41     DataValueType arrayValue(DataKeyType key, IndexType iRow = 0, IndexType iColumn = 0);
42     std::vector<DataKeyType> keys() const;
43     quint32 numberItems() const { return mItems.size(); }
44     DataHolder const& getItems() { return mItems; }
45     DataIDType id() const { return mID; }
46     ObjectType type() const { return mkType; }
47     QString const& name() const { return mName; }
48     void setName(QString const& name) { mName = name; }
49     static DataIDType maxObjectID() { return smMaxObjectID; }
50     static void setMaxObjectID(DataIDType iMaxObjectID) { smMaxObjectID = iMaxObjectID; }
51     virtual void serialize(QDataStream& stream) const;
52     virtual void deserialize(QDataStream& stream);
53     friend QDataStream& operator<<(QDataStream& stream, AbstractDataObject const& obj);
54     virtual void import(QTextStream& stream) = 0;
55     void write(QTextStream& stream) const;
56
57 protected:
58     const ObjectType mkType;
59     QString mName;
60     DataIDType mID;
61     DataHolder mItems;
62
63 private:
64     static DataIDType smMaxObjectID;
65 };
66
67 inline QDataStream& operator<<(QDataStream& stream, AbstractDataObject const& obj)
68 {
69     obj.serialize(stream);
70     return stream;
71 }
72
73
74
75
76
77 #endif // ABSTRACTDATAOBJECT_H

```

5.15 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/core/aliasdata.h File Reference

Specification of data types used in a project.

```
#include <QtGlobal>
```

Typedefs

- using **RSE::Core::DataValueType** = double
- using **RSE::Core::DataKeyType** = double
- using **RSE::Core::DataIDType** = qint64

5.15.1 Detailed Description

Specification of data types used in a project.

Author

Pavel Lakiza

Date

May 2021

5.16 aliasdata.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef ALIASDATA_H
4 #define ALIASDATA_H
5
6 #include <QtGlobal>
7
8 namespace RSE::Core
9 {
10
11     using DataValueType = double;
12     using DataKeyType = double;
13     using DataIDType = qint64;
14
15 }
16
17 #endif // ALIASDATA_H
```

5.17 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/array.cpp File Reference

Implementation of the Array class.

```
#include "array.h"
```

5.17.1 Detailed Description

Implementation of the Array class.

Author

Pavel Lakiza

Date

March 2021

5.18 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/core/array.h File Reference

Declaration of the Array class.

```
#include <QDebug>
#include "constants.h"
```

Classes

- class [RSE::Core::Array< T >](#)
Numerical array class.
- class [RSE::Core::Array< T >::Row< U >](#)
Proxy class to acquire a row by index.

Typedefs

- using **RSE::Core::IndexType** = quint32

Functions

- template<typename K >
QDebug **RSE::Core::operator**<< (QDebug stream, Array< K > &array)
Print all array values using the matrix format.
- template<typename K >
QDataStream & **RSE::Core::operator**<< (QDataStream &stream, Array< K > const &array)
Write an array to a binary stream.
- template<typename K >
QDataStream & **RSE::Core::operator**>> (QDataStream &stream, Array< K > &array)
Read an array from a stream.
- template<typename K >
QTextStream & **RSE::Core::operator**<< (QTextStream &stream, Array< K > const &array)
Write an array to a text stream.

5.18.1 Detailed Description

Declaration of the Array class.

Author

Pavel Lakiza

Date

July 2022

5.19 array.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ARRAY_H
9 #define ARRAY_H
10
11 #include <QDebug>
12 #include "constants.h"
13
14 namespace RSE::Core
15 {
16
17 using IndexType = quint32;
18
19 template<typename T>
20 class Array
21 {
22 private:
23     template <typename U> class Row;
24
25 public:
26     Array(IndexType numRows = 0, IndexType numCols = 0);
27     Array(Array<T> const& another);
28     Array(Array<T>&& another);
29     ~Array();
30     T* data() { return mpData; }
31     void resize(IndexType numRows, IndexType numCols);
32     void removeColumn(IndexType iRemoveColumn);
33     void swapColumns(IndexType iFirstColumn, IndexType iSecondColumn);
34     void clear();
35     IndexType rows() const { return mNumRows; };
36     IndexType cols() const { return mNumCols; };
37     IndexType size() const { return mNumRows * mNumCols; }
38     Row<T> operator[](IndexType iRow) { return Row<T>(&mpData[mNumCols * iRow]); };
39     Row<T> operator[] (IndexType iRow) const { return Row<T>(&mpData[mNumCols * iRow]); };
40     Array& operator=(Array<T> const& another);
41     template<typename K> friend QDebug operator<<(QDebug stream, Array<K>& array);
42     template<typename K> friend QDataStream& operator<<(QDataStream& stream, Array<K> const& array);
43     template<typename K> friend QDataStream& operator>>(QDataStream& stream, Array<K>& array);
44     template<typename K> friend QTextStream& operator<<(QTextStream& stream, Array<K> const& array);
45     template<typename K> friend QTextStream& operator>>(QTextStream& stream, Array<K>& array);
46
47 private:
48     IndexType mNumRows;
49     IndexType mNumCols;
50     T* mpData = nullptr;
51     template <typename U>
52     class Row
53     {
54     public:
55         Row() = delete;
56         Row(T* pData) : mpRow(pData) { };
57         ~Row() { }
58         T& operator[] (IndexType iCol) { return mpRow[iCol]; }
59         T const& operator[] (IndexType iCol) const { return mpRow[iCol]; }
60         T* data() { return mpRow; }
61     private:
62         T* mpRow;
63     };
64 };
65
66 template<typename K>

```

```

72 inline QDebug operator<<(QDebug stream, Array<K>& array)
73 {
74     IndexType const& numRows = array.mNumRows;
75     IndexType const& numCols = array.mNumCols;
76     stream = stream.noquote();
77     stream << QString("Array size: %1 x %2").arg(QString::number(numRows), QString::number(numCols));
78     stream << Qt::endl;
79     for (IndexType iRow = 0; iRow != numRows; ++iRow)
80     {
81         for (IndexType jCol = 0; jCol != numCols; ++jCol)
82             stream << QString::number(array[iRow][jCol]);
83         stream << Qt::endl;
84     }
85     return stream;
86 }
87
88 template<typename K>
89 inline QDataStream& operator<<(QDataStream& stream, Array<K> const& array)
90 {
91     stream << array.mNumRows << array.mNumCols;
92     IndexType const& size = array.size();
93     for (IndexType i = 0; i != size; ++i)
94         stream << array.mpData[i];
95     return stream;
96 }
97
98 template<typename K>
99 inline QDataStream& operator>>(QDataStream& stream, Array<K>& array)
100 {
101     delete[] array.mpData;
102     stream >> array.mNumRows >> array.mNumCols;
103     IndexType const& size = array.size();
104     array.mpData = new K[size];
105     for (IndexType i = 0; i != size; ++i)
106         stream >> array.mpData[i];
107     return stream;
108 }
109
110 template<typename K>
111 inline QTextStream& operator<<(QTextStream& stream, Array<K> const& array)
112 {
113     IndexType const& numRows = array.mNumRows;
114     IndexType const& numCols = array.mNumCols;
115     for (IndexType iRow = 0; iRow != numRows; ++iRow)
116     {
117         for (IndexType jCol = 0; jCol != numCols; ++jCol)
118             stream << QString::number(array[iRow][jCol], 'g', RSE::Constants::kWritingPrecision);
119         stream << Qt::endl;
120     }
121     return stream;
122 }
123
124 #endif // ARRAY_H

```

5.20 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/core/constants.h File Reference

Computational constants.

Variables

- const double **RSE::Constants::kGravitationalAcceleration** = 9.8067
Gravitational acceleration, m/s².
- const int **RSE::Constants::kWritingPrecision** = 15
Number of digits to be written to a file.

5.20.1 Detailed Description

Computational constants.

Author

Pavel Lakiza

Date

July 2022

5.21 constants.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef CONSTANTS_H
4 #define CONSTANTS_H
5
6 namespace RSE::Constants
7 {
8
9     const double kGravitationalAcceleration = 9.8067;
10
11     const int kWritingPrecision = 15;
12
13 }
14
15 #endif // CONSTANTS_H
```

5.22 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/core/damper.cpp File Reference

Definition of the Damper class.

```
#include "damper.h"
#include "constants.h"
```

5.22.1 Detailed Description

Definition of the Damper class.

Author

Pavel Lakiza

Date

July 2022

5.23 /home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/core/damper.h File Reference

Declaration the Damper class.

```
#include <QPair>
```

Classes

- class [RSE::Core::Damper](#)

Class to compute and collect properties of a damper.

5.23.1 Detailed Description

Declaration the Damper class.

Author

Pavel Lakiza

Date

July 2022

5.24 damper.h

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef DAMPER_H
9 #define DAMPER_H
10
11 #include <QPair>
12
13 namespace RSE::Core
14 {
15
16
17 class Damper
18 {
19 public:
20     Damper(double massCable, double massLoadedCable, double workingLength, double bouncerLength,
21           double springLength = 0, double springStiffness = 0);
22     ~Damper() = default;
23     // Get parameters of damper
24     double massCable() const { return mMassCable; }
25     double massLoadedCable() const { return mMassLoadedCable; }
26     double workingLength() const { return mWorkingLength; }
27     double bouncerLength() const { return mBouncerLength; }
28     double springLength() const { return mSpringLength; }
29     double springStiffness() const { return mSpringStiffness; }
30     // Set parameters of a damper
31     void setMassCable(double massCable) { mMassCable = massCable; }
32     void setMassLoadedCable(double massLoadedCable) { mMassLoadedCable = massLoadedCable; }
33     void setWorkingLength(double workingLength) { mWorkingLength = workingLength; }
34     void setBouncerLength(double bouncerLength) { mBouncerLength = bouncerLength; }
35     void setSpringLength(double springLength) { mSpringLength = springLength; }
36     void setSpringStiffness(double springStiffness) { mSpringStiffness = springStiffness; }
37     // Compute characteristics of a damper
38     void computeSpring();
39
40 private:
41     double mMassCable;
42     double mMassLoadedCable;
43     double mWorkingLength;
44     double mBouncerLength;
45     double mSpringLength = 0.0;
46     double mSpringStiffness = 0.0;
47 };
48
49
50
51
52
53
54
55
56
57 #endif // DAMPER_H
```

5.25 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.cpp File Reference

Definition of the DataBaseCables class.

```
#include <QFile>
#include <QTextStream>
#include "databasecables.h"
```

5.25.1 Detailed Description

Definition of the DataBaseCables class.

Author

Pavel Lakiza

Date

July 2022

5.26 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/databasecables.h File Reference

Declaration of the DataBaseCables class.

```
#include <QString>
#include <unordered_map>
```

Classes

- struct [RSE::Core::Cable](#)
Mechanical properties of a cable.
- class [RSE::Core::DataBaseCables](#)
Aggregate data of cables.

5.26.1 Detailed Description

Declaration of the DataBaseCables class.

Author

Pavel Lakiza

Date

July 2022

5.27 databasecables.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef DATACABLES_H
9 #define DATACABLES_H
10
11 #include <QString>
12 #include <unordered_map>
13
14 namespace RSE::Core
15 {
16
17
18 struct Cable
19 {
20     std::string name;
21     double bendingStiffness;
22     double torsionalStiffness;
23     double massPerLength;
24     double youngsModulus;
25     double area;
26 };
27
28
29 class DataBaseCables
30 {
31 public:
32     DataBaseCables(QString const& directory, QString const& fileName);
33     ~DataBaseCables() = default;
34     std::vector<std::string> names() const;
35     Cable const& getItem(std::string const& name) const { return mData.at(name); }
36
37 private:
38     bool readDataBase(QString const& pathFile);
39
40 private:
41     std::unordered_map<std::string, Cable> mData;
42 };
43
44 #endif // DATACABLES_H

```

5.28 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/fileutilities.cpp File Reference

Definition of utilites targeted to working with files.

```

#include <QDebug>
#include <QString>
#include <QFile>
#include <QDir>
#include <QPair>
#include "fileutilities.h"

```

5.28.1 Detailed Description

Definition of utilites targeted to working with files.

Author

Pavel Lakiza

Date

July 2022

5.29 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/fileutilities.h File Reference

Declaration of utilities targeted to working with files.

```
#include <QSharedPointer>
#include "abstractdataobject.h"
```

Functions

- `QPair< Core::AbstractDataObject::ObjectType, QSharedPointer< QFile > > RSE::Utilities::File::getDataObjectFile (QString const &path, QString const &fileName)`
Retrieve a pair consisted of a data object file and its type.
- `QString RSE::Utilities::File::loadFileContent (QString const &path)`
Load all the content of a file.

5.29.1 Detailed Description

Declaration of utilities targeted to working with files.

Author

Pavel Lakiza

Date

August 2022

5.30 fileutilities.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef FILEUTILITIES_H
4 #define FILEUTILITIES_H
5
6 #include <QSharedPointer>
7 #include "abstractdataobject.h"
8
9 class QFile;
10 class QString;
11
12 namespace RSE::Utilities::File
13 {
14     QPair<Core::AbstractDataObject::ObjectType, QSharedPointer<QFile>> getDataObjectFile(QString const& path,
15         QString const& fileName);
16     QString loadFileContent(QString const& path);
17 }
18
19 #endif // FILEUTILITIES_H
```

5.31 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/io.cpp File Reference

Definition of the IO class.

```
#include <QFile>
#include <QFileInfo>
#include <QDir>
#include "io.h"
#include "project.h"
```

5.31.1 Detailed Description

Definition of the IO class.

Author

Pavel Lakiza

Date

July 2022

5.32 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/io.h File Reference

Declaration of the IO class.

```
#include <QString>
#include <QPair>
#include "solutionoptions.h"
```

Classes

- class [RSE::Core::IO](#)
Class to save the project and solution data.

Typedefs

- using [RSE::Core::IOPair](#) = QPair< Project *, [RSE::Solution::SolutionOptions](#) * >

5.32.1 Detailed Description

Declaration of the IO class.

Author

Pavel Lakiza

Date

July 2022

5.33 io.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef IO_H
9 #define IO_H
10
11 #include <QString>
12 #include <QPair>
13 #include "solutionoptions.h"
14
15 namespace RSE
16 {
17
18     namespace Core
19     {
20
21         class Project;
22         class DataBaseCables;
23
24         using IOPair = QPair<Project*, RSE::Solution::SolutionOptions*>;
25
26         class IO
27         {
28         public:
29             IO(QString const& lastPath);
30             ~IO() = default;
31             QString const& lastPath() const { return mLastPath; }
32             QString const& extension() const { return mkProjectExtension; }
33             void saveAs(QString const& pathFile, Project& project, Solution::SolutionOptions& options);
34             IOPair open(QString const& pathFile, DataBaseCables const& dataBaseCables);
35
36         private:
37             const QString mkProjectExtension = ".rse";
38             QString mLastPath;
39         };
40     };
41
42 }
43
44 }
45
46 #endif // IO_H

```

5.34 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/numericalutilities.h File Reference

Declaration of utilities targeted to numerical operations.

```
#include <QtMath>
```

Functions

- bool **RSE::Utilities::Numerical::fuzzyCompare** (double p1, double p2, double eps)
Compare two floating-point numbers.

5.34.1 Detailed Description

Declaration of utilities targeted to numerical operations.

Author

Pavel Lakiza

Date

August 2022

5.35 numericalutilities.h

[Go to the documentation of this file.](#)

```
1
2
3 8 #ifndef NUMERICALUTILITIES_H
4 9 #define NUMERICALUTILITIES_H
5 10
6 11 #include <QtMath>
7 12
8 13 namespace RSE::Utilities::Numerical
9 14 {
10 15
11 17 inline bool fuzzyCompare(double p1, double p2, double eps)
12 18 {
13 19     return (qAbs(p1 - p2) <= eps * qMin(qAbs(p1), qAbs(p2)));
14 20 }
15 21
16 22 }
17 23
18 24 #endif // NUMERICALUTILITIES_H
```

5.36 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/project.cpp File Reference

Definition of the Project class.

```
#include <QFile>
#include <QLocale>
#include "project.h"
#include "scalarsdataobject.h"
#include "vectorsdataobject.h"
#include "fileutilities.h"
#include "solutionoptions.h"
```

Functions

- void **clearDataObjects** (DataObjects &dataObjects)
Helper function to clear a container consisted of pointers to data objects.
- QStringList **readAllLines** (QString const &path, QString const &fileName)
Read all the lines from a file.
- void **replaceStringEntry** (QString &string, int numSkipEntries, QString subString)
Replace a substring after specified number of skips.
- void **writeAllLines** (QStringList const &lines, QString const &path, QString const &fileName)
Write all the lines to a file.

5.36.1 Detailed Description

Definition of the Project class.

Author

Pavel Lakiza

Date

July 2022

5.37 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/project.h File Reference

Declaration of the Project class.

```
#include <QString>
#include "abstractdataobject.h"
#include "damper.h"
#include "rodsystem.h"
#include "support.h"
#include "databasecables.h"
```

Classes

- class [RSE::Core::Project](#)

Typedefs

- using **RSE::Core::DataObjects** = std::vector< AbstractDataObject * >

5.37.1 Detailed Description

Declaration of the Project class.

Author

Pavel Lakiza

Date

July 2022

5.38 project.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef PROJECT_H
9 #define PROJECT_H
10
11 #include <QString>
12 #include "abstractdataobject.h"
13 #include "damper.h"
14 #include "rodsystem.h"
15 #include "support.h"
16 #include "databasecables.h"
17
18 namespace RSE
19 {
20
21     namespace Solution
22     {
23         class SolutionOptions;
24     }
25
26     namespace Core
27     {
28         class ScalarDataObject;
29         class VectorDataObject;
30     }
31
32     using DataObjects = std::vector<AbstractDataObject*>;
33
34     class Project
35     {
36     public:
37         Project(QString const& name, DataBaseCables dataBaseCables, Damper damper, RodSystem rodSystem,
38             Support support);
39         ~Project();
40         QString const& name() const { return mName; }
41         void setName(QString const& name) { mName = name; }
42         Damper& damper() { return mDamper; }
43         RodSystem& rodSystem() { return mRodSystem; }
44         Support& support() { return mSupport; }
45         DataBaseCables const& dataBaseCables() const { return mDataBaseCables; }
46         // IO
47         void readTemplateData(QString const& path);
48         void writeCalcData(QString const& path, Solution::SolutionOptions const& options);
49
50     private:
51         AbstractDataObject* addDataObject(AbstractDataObject::ObjectType type);
52         void importDataObjects(QString const& path, QString const& fileName);
53         void readProjectID(QString const& path);
54         // Modify data objects
55         void modifyScalarDataObjects();
56         void modifyVectorDataObjects(Spans const& spans);
57         // IO
58         void writeDataObjects(DataObjects const& dataObjects, QString const& path, QString const& fileName);
59         void writeRods(QString const& path, QString const& fileName);
60         void writeProgram(QString const& path, QString const& fileName, int numRods, int numCalcModes);
61
62     private:
63         QString mName;
64         Damper mDamper;
65         RodSystem mRodSystem;
66         Support mSupport;
67     };
68

```

```

70     DataBaseCables mDataBaseCables;
72     DataObjects mScalarDataObjects;
73     DataObjects mVectorDataObjects;
75     int mProjectID;
77     QStringList mRods;
79     QStringList mProgram;
81     static const QString skProjectExtension;
82 };
83
84 }
85
86 }
87
88 #endif // PROJECT_H

```

5.39 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/rodsystem.cpp File Reference

Definition of the RodSystem class.

```

#include <functional>
#include <stdlib.h>
#include <stdio.h>
#include <gsl/gsl_multiroots.h>
#include "rodsystem.h"
#include "constants.h"
#include "databasecables.h"

```

Typedefs

- using **IntegralFun** = std::function< double(double)>

Functions

- double **integrate** (IntegralFun const &f, double const &a, double const &b, int const &n)
Compute integral using the MidPoint rule.
- double **x1** (double u, double u0, double uL)
- double **x2** (double u, double u0, double uL)
- double **Q1** (double u0, double uL)
- double **Q2** (double u, double u0, double uL)
- double **Nf** (double u, double u0, double uL)
- double **LL** (double L, double u0, double uL, [RodSystemParameters](#) const *pParameters)
- double **projForce** (double u0, double uL, double L, [RodSystemParameters](#) const *pParameters)
- int **equations** (const gsl_vector *pState, void *pVoidParameters, gsl_vector *pFun)
System of equations.

5.39.1 Detailed Description

Definition of the RodSystem class.

Author

Pavel Lakiza

Date

July 2022

5.40 /home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/core/rodsystem.h File Reference

Declaration of the RodSystem class.

```
#include <QString>
#include <vector>
#include <gsl/gsl_vector.h>
```

Classes

- struct [RSE::Core::Spans](#)
Computed parameters of spans.
- struct [RSE::Core::RodSystemParameters](#)
Parameters of a rod system.
- class [RSE::Core::RodSystem](#)

5.40.1 Detailed Description

Declaration of the RodSystem class.

Author

Pavel Lakiza

Date

July 2022

5.41 rodsystem.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef RODSYSTEM_H
4 #define RODSYSTEM_H
5
6 #include <QString>
7 #include <vector>
8 #include <gsl/gsl_vector.h>
9
10 namespace RSE::Core
11 {
12     struct Cable;
13
14     struct Spans
15     {
16         Spans(int numRods) : u0(numRods), uL(numRods), L(numRods) { }
17
18         std::vector<double> u0;
19         std::vector<double> uL;
20         std::vector<double> L;
21         double projectedForce;
22     };
23
24     struct RodSystemParameters
25     {
```

```

39     std::vector<double> distances;
40
41     double massPerLength;
42     double youngsModulus;
43     double area;
44     double force;
45     int numRods = 0;
46 };
47
48 class RodSystem
49 {
50 public:
51     RodSystem(std::vector<double> distances, Cable const& cable, double force);
52     // Get parameters of a system
53     std::vector<double> const& distances() const { return mParameters.distances; }
54     std::string const& nameCable() const { return mNameCable; }
55     double force() const { return mParameters.force; }
56     int numRods() const { return mParameters.numRods; }
57     double massPerLength() const { return mParameters.massPerLength; }
58     // Set parameters of a system
59     void setDistances(std::vector<double> const& distances);
60     void setCable(Cable const& cable);
61     void setForce(double force) { mParameters.force = force; };
62     // Compute parameters of spans
63     Spans computeSpans();
64
65 private:
66     RodSystemParameters mParameters;
67     std::string mNameCable;
68 };
69
70 #endif // RODSYSTEM_H

```

5.42 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.cpp File Reference

Implementation of the ScalarDataObject class.

```
#include "scalardataobject.h"
```

5.42.1 Detailed Description

Implementation of the ScalarDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.43 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/scalardataobject.h File Reference

Declaration of the ScalarDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [RSE::Core::ScalarDataObject](#)
Scalar data object.

5.43.1 Detailed Description

Declaration of the ScalarDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.44 scalardataobject.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef SCALARDATAOBJECT_H
9 #define SCALARDATAOBJECT_H
10
11 #include "abstractdataobject.h"
12
13 namespace RSE::Core
14 {
15
16
17 class ScalarDataObject : public AbstractDataObject
18 {
19 public:
20     ScalarDataObject(QString const& name);
21     ~ScalarDataObject();
22     AbstractDataObject* clone() const override;
23     DataItemType& addItem(DataValueType key) override;
24     static quint32 numberInstances() { return smNumInstances; }
25     void import(QTextStream& stream) override;
26
27 private:
28     static quint32 smNumInstances;
29 };
30
31 }
32
33 #endif // SCALARDATAOBJECT_H

```

5.45 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/solutionmanager.cpp File Reference

Definition of the SolutionManager class.

```

#include <QFileInfo>
#include <QDir>
#include "solutionoptions.h"
#include "solutionmanager.h"

```


5.45.1 Detailed Description

Definition of the SolutionManager class.

Author

Pavel Lakiza

Date

July 2022

5.46 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionmanager.h File Reference

Declaration of the SolutionManager class.

```
#include <QString>
#include <QProcess>
#include <QObject>
#include <QTextStream>
#include "project.h"
```

Classes

- class [RSE::Solution::SolutionManager](#)
Class to control the solution process.

5.46.1 Detailed Description

Declaration of the SolutionManager class.

Author

Pavel Lakiza

Date

July 2022

5.47 solutionmanager.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef SOLUTIONMANAGER_H
9 #define SOLUTIONMANAGER_H
10
11 #include <QString>
12 #include <QProcess>
13 #include <QObject>
14 #include <QTextStream>
15 #include "project.h"
16
17 namespace RSE::Solution
18 {
19
20 class SolutionOptions;
21
22 class SolutionManager : public QObject
23 {
24     Q_OBJECT
25
26 public:
27     SolutionManager(QString const& rootPath, QString const& relativeInputPath, QString const&
28         relativeOutputPath);
29     ~SolutionManager();
30     void solveRodSystem(Core::Project& project, SolutionOptions const& options);
31     void solveOptimization(Core::Project& project, SolutionOptions const& options);
32     void runVisualizer();
33
34 signals:
35     void outputSent(QByteArray);
36     void rodSystemSolved();
37     void optimizationSolved();
38     void optimizationStepPerformed();
39
40 public slots:
41     void stopSolution();
42
43 private:
44     void processRodSystemStream();
45     void processOptimizationStream();
46     void runParserProcess();
47     void writeOptimizationInput(QString const& pathFile, int numDampers, SolutionOptions const& options);
48     int getRodSystemStatus();
49
50 private:
51     QString mRootPath;
52     QString mInputPath;
53     QString mOutputPath;
54     QProcess* mpRodSystemSolver = nullptr;
55     QProcess* mpOptimizationSolver = nullptr;
56 };
57
58 }
59
60
61
62 #endif // SOLUTIONMANAGER_H

```

5.48 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/solutionoptions.cpp File Reference

Definition of the SolutionOptions class.

```
#include "solutionoptions.h"
```

5.48.1 Detailed Description

Definition of the SolutionOptions class.

Author

Pavel Lakiza

Date

July 2022

5.49 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/core/solutionoptions.h File Reference

Declaration of the SolutionOptions class.

Classes

- class [RSE::Solution::SolutionOptions](#)

5.49.1 Detailed Description

Declaration of the SolutionOptions class.

Author

Pavel Lakiza

Date

July 2022

5.50 solutionoptions.h

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef SOLUTIONOPTIONS_H
9 #define SOLUTIONOPTIONS_H
10
11 namespace RSE
12 {
13
14 namespace Solution
15 {
16
17 class SolutionOptions
18 {
19 public:
20     SolutionOptions() = default;
21     SolutionOptions(int numCalcModes, int numDampModes, int stepModes, double tolTrunc);
22     ~SolutionOptions() = default;
23     // Get parameters
24     int numCalcModes() const { return mNumCalcModes; }
25     int numDampModes() const { return mNumDampModes; }
26     int stepModes() const { return mStepModes; }
27     double tolTrunc() const { return mTolTrunc; }
28     // Set parameters
29     void setNumCalcModes(int numCalcModes) { mNumCalcModes = numCalcModes; }
30     void setNumDampModes(int numDampModes) { mNumDampModes = numDampModes; }
31     void setStepModes(int stepModes) { mStepModes = stepModes; }
```

```

32     void setTolTrunc(double tolTrunc) { mTolTrunc = tolTrunc; }
33
34 private:
35     int mNumCalcModes;
36     int mNumDampModes;
37     int mStepModes;
38     double mTolTrunc;
39 };
40
41
42
43
44
45
46
47
48
49
50 #endif // SOLUTIONOPTIONS_H

```

5.51 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/support.cpp File Reference

Definition of the Support class.

```
#include "support.h"
```

5.51.1 Detailed Description

Definition of the Support class.

Author

Pavel Lakiza

Date

July 2022

5.52 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/core/support.h File Reference

Declaration of the Support class.

Classes

- class [RSE::Core::Support](#)

Class to aggregate data of supports.

5.52.1 Detailed Description

Declaration of the Support class.

Author

Pavel Lakiza

Date

July 2022

5.53 support.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef SUPPORT_H
9 #define SUPPORT_H
10
11 namespace RSE::Core
12 {
13
14
15 class Support
16 {
17 public:
18     Support(double longitudinalStiffness, double verticalStiffness);
19     ~Support() = default;
20     // Get characteristics
21     double longitudinalStiffness() const { return mLongitudinalStiffness; }
22     double verticalStiffness() const { return mVerticalStiffness; }
23     // Set characteristics
24     void setLongitudinalStiffness(double longitudinalStiffness) { mLongitudinalStiffness =
        longitudinalStiffness; }
25     void setVerticalStiffness(double verticalStiffness) { mVerticalStiffness = verticalStiffness; }
26
27 private:
28     double mLongitudinalStiffness;
29     double mVerticalStiffness;
30 };
31
32 };
33
34 }
35
36 #endif // SUPPORT_H

```

5.54 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/core/vectordataobject.cpp File Reference

Implementation of the VectorDataObject class.

```
#include "vectordataobject.h"
```

Variables

- const IndexType **skNumElements** = 3

5.54.1 Detailed Description

Implementation of the VectorDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.55 [/home/qinterfly/Library/Projects/Current/RodSystem←](#) Estimator/src/core/vectordataobject.h File Reference

Declaration of the VectorDataObject class.

```
#include "abstractdataobject.h"
```

Classes

- class [RSE::Core::VectorDataObject](#)
Vector data object.

5.55.1 Detailed Description

Declaration of the VectorDataObject class.

Author

Pavel Lakiza

Date

July 2022

5.56 vectordataobject.h

[Go to the documentation of this file.](#)

```
1
2
3 8 #ifndef VECTORDATAOBJECT_H
4 9 #define VECTORDATAOBJECT_H
5 10
6 11 #include "abstractdataobject.h"
7 12
8 13 namespace RSE::Core
9 14 {
10 15
11 16 class VectorDataObject : public AbstractDataObject
12 17 {
13 18 public:
14 19     VectorDataObject(QString const& name);
15 20     ~VectorDataObject();
16 21     AbstractDataObject* clone() const override;
17 22     DataItemType& addItem(DataValueType key) override;
18 23     static quint32 numberInstances() { return smNumInstances; }
19 24     void import(QTextStream& stream) override;
20 25
21 26 private:
22 27     static quint32 smNumInstances;
23 28 };
24 29
25 30
26 31 }
27 32
28 33 #endif // VECTORDATAOBJECT_H
```

5.57 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/aliasklp.h File Reference

Declaration of aliases used in KLP results.

```
#include <vector>
#include <memory>
```

Typedefs

- using **KLP::PointerResult** = std::shared_ptr< Result >
- using **KLP::Results** = std::vector< PointerResult >

5.57.1 Detailed Description

Declaration of aliases used in KLP results.

Author

Pavel Lakiza

Date

July 2022

5.58 aliasklp.h

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef ALIASKLP_H
9 #define ALIASKLP_H
10
11 #include <vector>
12 #include <memory>
13
14 namespace KLP
15 {
16
17 class Result;
18 using PointerResult = std::shared_ptr<Result>;
19 using Results = std::vector<PointerResult>;
20
21 }
22
23 #endif // ALIASKLP_H
```

5.59 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/framecollection.h File Reference

Collection of the data associated with the specified frame.

```
#include "frameobject.h"
```

Classes

- struct [KLP::EnergyFrame](#)
Energy quantities associated with a frame.
- struct [KLP::StateFrame](#)
Kinematic and dynamic quantities associated with a frame.
- struct [KLP::FrameCollection](#)
Set of all quantities belonged to a frame.

Typedefs

- using **KLP::FloatFrameObject** = FrameObject< float >

Variables

- const int **KLP::kNumDirections** = 3

5.59.1 Detailed Description

Collection of the data associated with the specified frame.

Author

Pavel Lakiza

Date

July 2022

5.60 framecollection.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef FRAMECOLLECTION_H
9 #define FRAMECOLLECTION_H
10
11 #include "frameobject.h"
12
13 namespace KLP
14 {
15
16     const int kNumDirections = 3;
17
18     using FloatFrameObject = FrameObject<float>;
19
20     struct EnergyFrame
21     {
22     {
23         FloatFrameObject kinetic;
24         FloatFrameObject potential;
25         FloatFrameObject full;
26     };
27
28     struct StateFrame
29     {
30     {
31         FloatFrameObject displacements[kNumDirections];
32         FloatFrameObject rotations[kNumDirections];
33         FloatFrameObject forces[kNumDirections];
34         FloatFrameObject moments[kNumDirections];
35     };

```



```

36
37 struct FrameCollection
38 {
39     int numRods;
40     float time;
41     FloatFrameObject parameter;
42     FloatFrameObject naturalLength;
43     FloatFrameObject accumulatedNaturalLength;
44     FloatFrameObject coordinates[kNumDirections];
45     StateFrame state;
46     StateFrame projectedState;
47     StateFrame firstDerivativeState;
48     StateFrame secondDerivativeState;
49     StateFrame errorState;
50     FloatFrameObject strain;
51     std::vector<StateFrame> modalStates;
52     FloatFrameObject frequencies;
53     EnergyFrame energy;
54 };
55
56 }
57
58 #endif // FRAMECOLLECTION_H

```

5.61 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.cpp File Reference

Definition of the FrameObject class.

```
#include "frameobject.h"
```

5.61.1 Detailed Description

Definition of the FrameObject class.

Author

Pavel Lakiza

Date

July 2022

5.62 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobject.h File Reference

Declaration of the FrameObject class.

```
#include <QDebug>
#include "frameobjectiterator.h"
```

Classes

- class [KLP::FrameObject< T >](#)

Functions

- `template<typename K >`
`QDebug KLP::operator<< (QDebug stream, FrameObject< K > const &frameObject)`

5.62.1 Detailed Description

Declaration of the FrameObject class.

Author

Pavel Lakiza

Date

July 2022

5.63 frameobject.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef FRAMEOBJECT_H
9 #define FRAMEOBJECT_H
10
11 #include <QDebug>
12 #include "frameobjectiterator.h"
13
14 namespace KLP
15 {
16
17 template <typename T>
18 class FrameObject
19 {
20 public:
21     using iterator = FrameObjectIterator<T>;
22
23 public:
24     FrameObject(T const* pData = nullptr, T normFactor = 1.0, qint64 size = 0, qint64 step = 1);
25     ~FrameObject() = default;
26     bool isEmpty() const { return !mpData; }
27     qint64 size() const { return mSize; }
28     iterator begin() const { return iterator(mpData, mNormFactor, mStep); }
29     iterator end() const { return begin() + mSize; }
30     iterator operator[](int index) const { return begin() + index; }
31     template<typename K> friend QDebug operator<<(QDebug stream, FrameObject<K> const& frameObject);
32
33 private:
34     T const* mpData;
35     T mNormFactor;
36     qint64 mSize;
37     qint64 mStep;
38 };
39
40 template<typename K>
41 inline QDebug operator<<(QDebug stream, FrameObject<K> const& frameObject)
42 {
43     stream = stream.noquote();
44     for (auto it = frameObject.begin(); it != frameObject.end(); ++it)
45         stream << QString::number(*it) << Qt::endl;
46     return stream;
47 }
48
49 }
50
51 #endif // FRAMEOBJECT_H

```

5.64 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.cpp File Reference

Definition of the FrameObjectIterator class.

```
#include "frameobjectiterator.h"
```

5.64.1 Detailed Description

Definition of the FrameObjectIterator class.

Author

Pavel Lakiza

Date

July 2022

5.65 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/klp/frameobjectiterator.h File Reference

Declaration of the FrameObjectIterator class.

```
#include <QtGlobal>
```

Classes

- class [KLP::FrameObjectIterator< T >](#)
Class to iterate through data of a record.

5.65.1 Detailed Description

Declaration of the FrameObjectIterator class.

Author

Pavel Lakiza

Date

July 2022

5.66 frameobjectiterator.h

[Go to the documentation of this file.](#)

```

1
8 #ifndef FRAMEOBJECTITERATOR_H
9 #define FRAMEOBJECTITERATOR_H
10
11 #include <QtGlobal>
12
13 namespace KLP
14 {
15
16 template <typename T>
17 class FrameObjectIterator
18 {
19 public:
20     using self_type          = FrameObjectIterator<T>;
21     using iterator_category  = std::random_access_iterator_tag;
22     using difference_type    = std::ptrdiff_t;
23     using value_type         = T;
24     using pointer            = T const*;
25     using reference          = T const&;
26
27 public:
28     FrameObjectIterator(pointer pData, T normFactor, quint64 step);
29     // Access
30     value_type operator*() { return *mpData * mNormFactor; }
31     // Operators
32     self_type& operator++() { mpData += mStep; return *this; }
33     self_type operator++(int) { self_type temp = *this; ++(*this); return temp; }
34     self_type operator+(const difference_type& movement) { auto pOldData = mpData; mpData += movement * mStep; self_type temp = *this; mpData = pOldData; return temp; }
35     difference_type operator-(const FrameObjectIterator& another) const { return mpData - another.mpData; }
36     // Comparison
37     friend bool operator==(self_type const& first, self_type const& second) { return first.mpData == second.mpData; }
38     friend bool operator!=(self_type const& first, self_type const& second) { return !(first == second); }
39
40 private:
41     pointer mpData;
42     T mNormFactor;
43     quint64 const mStep;
44 };
45
46
47 }
48
49 #endif // FRAMEOBJECTITERATOR_H

```

5.67 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/klp/index.h File Reference

Specification of a structure to index records.

```

#include <QtGlobal>
#include "types.h"
#include <vector>

```

Classes

- struct [KLP::IndexData](#)
Data of each record.
- struct [KLP::Index](#)
Structure to navigate through records.

5.67.1 Detailed Description

Specification of a structure to index records.

Author

Pavel Lakiza

Date

July 2022

5.68 index.h

[Go to the documentation of this file.](#)

```

1
2 #ifndef INDEX_H
3 #define INDEX_H
4
5 #include <QtGlobal>
6 #include "types.h"
7 #include <vector>
8
9 namespace KLP
10 {
11
12 struct IndexData
13 {
14     quint64 position = 0;
15     quint64 size = 0;
16     quint64 step = 1;
17     quint64 partSize = 0;
18 };
19
20 struct Index
21 {
22     Index() { data.resize(RecordType::MAX_RECORD); }
23     std::vector<IndexData> data;
24     quint64 recordShift = 0;
25     quint64 relativeDataShift = 0;
26 };
27
28 }
29 #endif // INDEX_H

```

5.69 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/klp/result.cpp File Reference

Definition of the Result class.

```

#include <QFile>
#include <QDateTime>
#include <QFileInfo>
#include "result.h"

```

5.69.1 Detailed Description

Definition of the Result class.

Author

Pavel Lakiza

Date

August 2022

5.70 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/klp/result.h File Reference

Declaration of the Result class.

```
#include <QString>
#include <QDateTime>
#include "index.h"
#include "framecollection.h"
```

Classes

- struct [KLP::ResultInfo](#)
- class [KLP::Result](#)
Class to aggregate all the records.

5.70.1 Detailed Description

Declaration of the Result class.

Author

Pavel Lakiza

Date

August 2022

5.71 result.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef RESULT_H
9 #define RESULT_H
10
11 #include <QString>
12 #include <QDateTime>
13 #include "index.h"
14 #include "framecollection.h"
15
16 namespace KLP
17 {
18
19 struct ResultInfo
20 {
21     QDateTime creationDateTime;
22     qint64 numTotalRecords = 0;
23     qint64 numTimeRecords = 0;
24     uint fileSize = 0;
25     uint ID = -1;
26 };
27
28 class Result
29 {
30 public:
31     explicit Result(QString const& pathFile);
32     ~Result() = default;
33     bool isEmpty() const { return mContent.isEmpty(); }
34     QVector<double> const& time() const { return mTime; }
35     QString const& pathFile() const { return mkPathFile; }
36     QString name() const;
37     int numRods(qint64 iFrame) const;
38     qint64 numTotalRecords() const { return mNumTotalRecords; }
39     qint64 numTimeRecords() const { return mTime.size(); }
40     ResultInfo info() const;
41     FrameCollection getFrameCollection(qint64 iFrame) const;
42     void update();
43
44 private:
45     bool read();
46     void buildIndex();
47     void setStateFrameData(StateFrame& state, RecordType type, qint64 iFrame, qint64 iStartData,
48         std::vector<float> const& normFactors) const;
49     FloatFrameObject getFrameObject(qint64 iFrame, RecordType type, float normFactor = 1.0f, qint64 shift
50         = 0) const;
51 private:
52     QString const mkPathFile;
53     QByteArray mContent;
54     std::vector<Index> mIndex;
55     qint64 mNumTotalRecords;
56     QVector<double> mTime;
57     char mNumBytesRod;
58 };
59
60
61
62
63
64
65
66
67
68 #endif // RESULT_H

```

5.72 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/klp/types.h File Reference

Specification of data types in a KLP file.

Enumerations

- enum `KLP::RecordType` {
R = 2 , **Xi** = 3 , **S** = 4 , **SS** = 5 ,
X1 = 6 , **X2** = 7 , **X3** = 8 , **U** = 9 ,
Ut = 10 , **Utt** = 11 , **EPS** = 12 , **UI** = 13 ,

BETA = 15 , **Qm** = 16 , **qm** = 17 , **AE** = 18 ,
MF = 19 , **MV** = 20 , **ND** = 21 , **FM** = 22 ,
ERR = 23 , **MASS** = 24 , **RMASS** = 25 , **IP** = 26 ,
CSM = 27 , **CS** = 28 , **CSP** = 29 , **CSE** = 30 ,
CSG = 31 , **FI** = 32 , **FM2** = 33 , **EM** = 34 ,
EN = 35 , **MAX_RECORD** }

Types of records.

- enum `KLP::NondimensionalType` {
Time = 0 , **Displacement** = 1 , **Force** = 2 , **Moment** = 3 ,
DistributedForce = 7 , **DistributedMoment** = 8 , **Speed** = 9 , **Acceleration** = 10 ,
MAX_NONDIM }

Types of nondimensional coefficients.

5.72.1 Detailed Description

Specification of data types in a KLP file.

Author

Pavel Lakiza

Date

July 2022

5.73 types.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef TYPES_H
4 #define TYPES_H
5
6 namespace KLP
7 {
8     enum RecordType
9     {
10         R      = 2,    // Rods
11         Xi     = 3,    // Parameter
12         S      = 4,    // Natural length
13         SS     = 5,    // Accumulated natural length
14         X1     = 6,    // Coordinate X1
15         X2     = 7,    // Coordinate X2
16         X3     = 8,    // Coordinate X3
17         U      = 9,    // State vector: [U1, U2, U3, w1, w2, w3, Q1, Q2, Q3, M1, M2, M3]
18         Ut     = 10,   // First-order derivative of the state vector with respect to time
19         Utt    = 11,   // Second-order derivative of the state vector with respect to time
20         EPS    = 12,   // Tensile-compressive strain
21         U1     = 13,   // Projected state vector: [U1L, U2L, U3L, w1, w2, w3, Q1L, Q2L, Q3L, M1L, M2L, M3L]
22         BETA   = 15,   // Rotation matrix
23         Qm     = 16,   // Loads
24         qm     = 17,   // Distributed loads
25         AE     = 18,   // Aerodynamic
26         MF     = 19,   // Eigenfrequencies
27         MV     = 20,   // Eigenvectors
28         ND     = 21,   // Nondimensional coefficients [use NondimensionalType to navigate]
29         FM     = 22,   // Finite element model
30         ERR    = 23,   // Computational errors of the state vector
31         MASS   = 24,   // Total mass and the center of gravity
32         RMASS  = 25,   // Masses of rods
33         IP     = 26,   // Cross sections
34         CSM    = 27,   // ?
35         CS     = 28,   // ?
36         CSP    = 29,   // ?
37         CSE    = 30,   // ?
38     }
39 }
```



```

45     CSG    = 31, // ?
46     FI     = 32, // Finite element image: set of coordinates (X, Y, Z) to plot lines
47     FM2    = 33, // ?
48     EM     = 34, // Effective masses
49     EN     = 35, // Energy
50     MAX_RECORD
51 };
52
54 enum NondimensionalType
55 {
56     Time           = 0,
57     Displacement   = 1,
58     Force          = 2,
59     Moment         = 3,
60     DistributedForce = 7,
61     DistributedMoment = 8,
62     Speed          = 9,
63     Acceleration   = 10,
64     MAX_NONDIM
65 };
66
67 }
68
69 #endif // TYPES_H

```

5.74 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/main/main.cpp File Reference ↩

Startup.

```

#include <QFile>
#include <QApplication>
#include "central/mainwindow.h"
#include "viewers/apputilities.h"

```

Functions

- int **main** (int argc, char *argv[])
Startup point.

5.74.1 Detailed Description

Startup.

Author

Pavel Lakiza

Date

July 2022

5.75 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/abstractgraphdata.cpp File Reference ↩

Definition of the AbstractGraphData class.

```

#include "abstractgraphdata.h"

```

5.75.1 Detailed Description

Definition of the AbstractGraphData class.

Author

Pavel Lakiza

Date

July 2022

5.76 [/home/qinterfly/Library/Projects/Current/RodSystem←](#) Estimator/src/viewers/abstractgraphdata.h File Reference

Declaration of the AbstractGraphData class.

```
#include <QObject>
#include "aliasviewers.h"
#include "framecollection.h"
```

Classes

- class [RSE::Viewers::AbstractGraphData](#)

5.76.1 Detailed Description

Declaration of the AbstractGraphData class.

Author

Pavel Lakiza

Date

July 2022

5.77 abstractgraphdata.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ABSTRACTGRAPHDATA_H
9 #define ABSTRACTGRAPHDATA_H
10
11 #include <QObject>
12 #include "aliasviewers.h"
13 #include "framecollection.h"
14
15 namespace RSE::Viewers
16 {
17
18 class AbstractGraphData : public QObject
19 {
20     Q_OBJECT
21
22 public:
23     enum Category
24     {
25         cSpaceTime,
26         cKinematics,
27         cForce,
28         cEnergy,
29         cModal,
30         cEstimation
31     };
32     enum Direction
33     {
34         dFirst,
35         dSecond,
36         dThird,
37         dFull
38     };
39     Q_ENUM(Category)
40     Q_ENUM(Direction)
41     AbstractGraphData(Category category, Direction direction);
42     virtual ~AbstractGraphData() = 0;
43     virtual GraphDataset getDataset(KLP::FrameCollection const& collection, qint64 sliceIndex = -1) const
44     = 0;
45     virtual int type() const = 0;
46     Category category() const { return mCategory; }
47     Direction direction() const { return mDirection; }
48
49 protected:
50     GraphDataset getAbsoluteData(KLP::FloatFrameObject const components[], qint64 iStart, qint64 iEnd)
51     const;
52     GraphDataset sliceByIndex(KLP::FloatFrameObject const& component, qint64 index) const;
53     GraphDataset sliceByDirectionAndIndex(KLP::FloatFrameObject const components[], Direction direction,
54     qint64 index) const;
55
56 protected:
57     Category mCategory;
58     Direction mDirection;
59 };
60 #endif // ABSTRACTGRAPHDATA_H

```

5.78 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/aliasviewers.h File Reference

Declaration of aliases used in viewers.

```

#include <QtGlobal>
#include <QVector>
#include <map>

```

Typedefs

- using **RSE::Viewers::GraphIDType** = qint64
- using **RSE::Viewers::GraphValueType** = double
- using **RSE::Viewers::GraphDataset** = QVector< GraphValueType >
- using **RSE::Viewers::PointerGraph** = std::shared_ptr< Graph >
- using **RSE::Viewers::MapGraphs** = std::map< GraphIDType, PointerGraph >

5.78.1 Detailed Description

Declaration of aliases used in viewers.

Author

Pavel Lakiza

Date

August 2022

5.79 aliasviewers.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ALIASVIEWERS_H
9 #define ALIASVIEWERS_H
10
11 #include <QtGlobal>
12 #include <QVector>
13 #include <map>
14
15 namespace RSE::Viewers
16 {
17
18 class Graph;
19 using GraphIDType = qint64;
20 using GraphValueType = double;
21 using GraphDataset = QVector<GraphValueType>;
22 using PointerGraph = std::shared_ptr<Graph>;
23 using MapGraphs = std::map<GraphIDType, PointerGraph>;
24
25 }
26
27 #endif // ALIASVIEWERS_H

```

5.80 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/viewers/apputilities.cpp File Reference

Definition of utilites targeted to working with application data.

```

#include <QApplication>
#include <QFontDatabase>
#include <QScreen>
#include <QWidget>
#include "apputilities.h"
#include "fileutilities.h"

```

5.80.1 Detailed Description

Definition of utilites targeted to working with application data.

Author

Pavel Lakiza

Date

July 2022

5.81 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/apputilities.h File Reference

Declaration of utilities targeted to working with application data.

```
#include <QWidget>
```

Functions

- void **RSE::Utilities::App::setStyle** ()
Assign style features to the application.
- void **RSE::Utilities::App::moveToCenter** (QWidget *pChildWidget, QWidget *pLeadingWidget=nullptr)
Align the child widget to the center of the leading widget or, if not specified, to the screen center.
- QStringList **RSE::Utilities::App::standardColorNames** ()
Retrieve a set of names of standard colors.

5.81.1 Detailed Description

Declaration of utilities targeted to working with application data.

Author

Pavel Lakiza

Date

July 2022

5.82 apputilities.h

[Go to the documentation of this file.](#)

```
1
2
3 #ifndef APPUTILITIES_H
4 #define APPUTILITIES_H
5
6 #include <QWidget>
7
8 namespace RSE
9 {
10
11     namespace Utilities
12     {
13
14         namespace App
15         {
16
17             void setStyle();
18             void moveToCenter(QWidget* pChildWidget, QWidget* pLeadingWidget = nullptr);
19             QStringList standardColorNames();
20
21         }
22     }
23 }
24
25 #endif // APPUTILITIES_H
```

5.83 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/convergenceviewer.cpp File Reference

Definition of the ConvergenceViewer class.

```
#include <QVBoxLayout>
#include "convergenceviewer.h"
#include "apputilities.h"
```

5.83.1 Detailed Description

Definition of the ConvergenceViewer class.

Author

Pavel Lakiza

Date

August 2022

5.84 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/convergenceviewer.h File Reference

Declaration of the ConvergenceViewer class.

```
#include <QWidget>
#include "array.h"
#include "qcustomplot.h"
```

Classes

- class [RSE::Viewers::ConvergenceViewer](#)
Class to represent convergence of viscosities.

5.84.1 Detailed Description

Declaration of the ConvergenceViewer class.

Author

Pavel Lakiza

Date

August 2022

5.85 convergenceviewer.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef CONVERGENCEVIEWER_H
9 #define CONVERGENCEVIEWER_H
10
11 #include <QWidget>
12 #include "array.h"
13 #include "qcustomplot.h"
14
15 namespace RSE
16 {
17
18 namespace Viewers
19 {
20
21
22 class ConvergenceViewer : public QWidget
23 {
24 public:
25     ConvergenceViewer(QString const& pathFile, QWidget* pParent = nullptr);
26     ~ConvergenceViewer();
27     void plot();
28
29 private:
30     void initialize();
31     bool read();
32
33 private:
34     QString const mkPathFile;
35     QCustomPlot* mpFigure;
36     QStringList mStandardColorNames;
37     QVector<QCPScatterStyle::ScatterShape> mStandardShapes;
38     QVector<int> mCalcModes;
39     Core::Array<double> mDampingValues;
40 };
41
42 }
43
44 }
45
46 #endif // CONVERGENCEVIEWER_H

```

5.86 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/energygraphdata.cpp File Reference

Definition of the EnergyGraphData class.

```

#include "energygraphdata.h"
#include "klp/framecollection.h"

```

5.86.1 Detailed Description

Definition of the EnergyGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.87 [/home/qinterfly/Library/Projects/Current/RodSystem←](#) Estimator/src/viewers/energygraphdata.h File Reference

Declaration of the EnergyGraphData class.

```
#include "abstractgraphdata.h"
```

Classes

- class [RSE::Viewers::EnergyGraphData](#)
Class to deal with energy entities of KLP-data.

5.87.1 Detailed Description

Declaration of the EnergyGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.88 energygraphdata.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ENERGYGRAPHDATA_H
9 #define ENERGYGRAPHDATA_H
10
11 #include "abstractgraphdata.h"
12
13 namespace RSE::Viewers
14 {
15
16
17 class EnergyGraphData : public AbstractGraphData
18 {
19     Q_OBJECT
20
21 public:
22     enum EnergyType
23     {
24         enKinetic,
25         enPotential,
26         enFull
27     };
28     Q_ENUM(EnergyType)
29     EnergyGraphData(EnergyType type, Direction direction = Direction::dFull);
30     ~EnergyGraphData() = default;
31     GraphDataset getDataset(KLP::FrameCollection const& collection, qint64 sliceIndex) const override;
32     int type() const override { return mType; }
33
34 private:
35     EnergyType mType;
36 };
37
38 }
39
40 #endif // ENERGYGRAPHDATA_H

```

5.89 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/estimationgraphdata.cpp File Reference

Declaration of the EstimationGraphData class.

```
#include "estimationgraphdata.h"
```

5.89.1 Detailed Description

Declaration of the EstimationGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.90 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/estimationgraphdata.h File Reference

Declaration of the EstimationGraphData class.

```
#include "abstractgraphdata.h"
```

Classes

- class [RSE::Viewers::EstimationGraphData](#)
Class to estimate errors of entities in KLP-data.

5.90.1 Detailed Description

Declaration of the EstimationGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.91 estimationgraphdata.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef ESTIMATIONGRAPHDATA_H
9 #define ESTIMATIONGRAPHDATA_H
10
11 #include "abstractgraphdata.h"
12
13 namespace RSE
14 {
15
16 namespace Viewers
17 {
18
19 class EstimationGraphData : public AbstractGraphData
20 {
21     Q_OBJECT
22
23 public:
24     enum EstimationType
25     {
26         esDisplacement,
27         esRotation,
28         esForce,
29         esMoment
30     };
31     Q_ENUM(EstimationType)
32     EstimationGraphData(EstimationType type, Direction direction = Direction::dFull);
33     ~EstimationGraphData() = default;
34     GraphDataset getDataset(KLP::FrameCollection const& collection, qint64 sliceIndex) const override;
35     int type() const override { return mType; }
36
37 private:
38     EstimationType mType;
39 };
40
41
42 }
43
44 }
45
46
47
48 #endif // ESTIMATIONGRAPHDATA_H

```

5.92 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.cpp File Reference

Definition of the ExtendedGraphPlot class.

```
#include <QApplication>
#include <QMenu>
#include "extendedgraphplot.h"
```

5.92.1 Detailed Description

Definition of the ExtendedGraphPlot class.

Author

Pavel Lakiza

Date

August 2022

5.93 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedgraphplot.h File Reference

Declaration of the ExtendedGraphPlot class.

```
#include "qcustomplot.h"
```

Classes

- class [RSE::Viewers::ExtendedGraphPlot](#)

5.93.1 Detailed Description

Declaration of the ExtendedGraphPlot class.

Author

Pavel Lakiza

Date

August 2022

5.94 extendedgraphplot.h

[Go to the documentation of this file.](#)

```

1
2 #ifndef EXTENDEDGRAPHPLOT_H
3 #define EXTENDEDGRAPHPLOT_H
4
5 #include "qcustomplot.h"
6
7 namespace RSE
8 {
9
10 namespace Viewers
11 {
12
13 class ExtendedGraphPlot : public QCustomPlot
14 {
15     Q_OBJECT
16
17 public:
18     ExtendedGraphPlot(QWidget* pParent = nullptr);
19
20 protected:
21     void contextMenuEvent (QContextMenuEvent* pEvent) override;
22
23 private:
24     void createActions();
25     void copyPixmapToClipboard();
26     void savePixmap();
27     void refresh();
28
29 private:
30     QAction* mpCopyAction;
31     QAction* mpSaveAction;
32     QAction* mpRefreshAction;
33 };
34
35 }
36
37 #endif // EXTENDEDGRAPHPLOT_H

```

5.95 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/extendedsurfacehandler.cpp File Reference

Definition of the ExtendedSurfaceHandler class.

```

#include <Q3DSurface>
#include <QMenu>
#include <QApplication>
#include <QClipboard>
#include "extendedsurfacehandler.h"

```

Variables

- const int **skMSAASamples** = 8

5.95.1 Detailed Description

Definition of the ExtendedSurfaceHandler class.

Author

Pavel Lakiza

Date

August 2022

5.96 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/extendedsurfacehandler.h File Reference

Declaration of the ExtendedSurfaceHandler class.

```
#include <Q3DInputHandler>
```

Classes

- class [RSE::Viewers::ExtendedSurfaceHandler](#)

Class which enables additional actions while working with a 3D-surface.

5.96.1 Detailed Description

Declaration of the ExtendedSurfaceHandler class.

Author

Pavel Lakiza

Date

August 2022

5.97 extendedsurfacehandler.h

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef EXTENDED_SURFACE_HANDLER_H
9 #define EXTENDED_SURFACE_HANDLER_H
10
11 #include <Q3DInputHandler>
12
13 class Q3DSurface;
14 class QMenu;
15
16 namespace RSE
17 {
18
19     namespace Viewers
20     {
21
22         class ExtendedSurfaceHandler : public Q3DInputHandler
23         {
24         public:
25             ExtendedSurfaceHandler(Q3DSurface* pSurface, QObject* pParent = nullptr);
26
27         protected:
28             void mousePressEvent(QMouseEvent* pEvent, const QPoint& mousePos) override;
29
30         private:
31             void createActions();
32             void showContextMenu(QPoint const& position);
33             void copyImageToClipboard();
34             void saveImage();
35
36         private:
37             Q3DSurface* mpSurface;
38             QAction* mpCopyAction;
39             QAction* mpSaveAction;
40     };
41
42 }
43
44 }
45
46 #endif // EXTENDED_SURFACE_HANDLER_H
```

5.98 [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.cpp](#) File Reference

Definition of the FigureManager class.

```
#include <Q3DSurface>
#include "DockWidget.h"
#include "figuremanager.h"
#include "extendedgraphplot.h"
#include "extendedsurfacehandler.h"
```

5.98.1 Detailed Description

Definition of the FigureManager class.

Author

Pavel Lakiza

Date

August 2022

5.99 [/home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/figuremanager.h](#) File Reference

Declaration of the FigureManager class.

Classes

- class [RSE::Viewers::FigureManager](#)
Manager to create and select figures of different types: graphs and surfaces.

5.99.1 Detailed Description

Declaration of the FigureManager class.

Author

Pavel Lakiza

Date

August 2022

5.100 figuremanager.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef FIGUREMANAGER_H
9 #define FIGUREMANAGER_H
10
11 class QWidget;
12 class Q3DSurface;
13
14 namespace ads
15 {
16 class CDockWidget;
17 }
18
19 namespace RSE
20 {
21
22 namespace Viewers
23 {
24
25 class ExtendedGraphPlot;
26
27
28 class FigureManager
29 {
30 public:
31     FigureManager(ads::CDockWidget* pFigureContainer);
32     ~FigureManager();
33     // Getters
34     ExtendedGraphPlot* graphFigure() { return mpGraphFigure; }
35     Q3DSurface* surfaceFigure() { return mpSurfaceFigure; }
36     // Setters
37     void clear();
38     void selectGraphFigure();
39     void selectSurfaceFigure();
40
41 private:
42     void initializeGraphFigure();
43     void initializeSurfaceFigure();
44     void clearGraphFigure();
45     void clearSurfaceFigure();
46
47 private:
48     ads::CDockWidget* mpFigureContainer;
49     ExtendedGraphPlot* mpGraphFigure;
50     Q3DSurface* mpSurfaceFigure;
51     QWidget* mpSurfaceFigureContainer;
52 };
53
54 }
55
56 }
57
58 #endif // FIGUREMANAGER_H

```

5.101 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/graph.cpp File Reference

Definition of the Graph class.

```

#include "graph.h"
#include "spacetimegraphdata.h"

```

Typedefs

- using **DataSign** = std::pair< AbstractGraphData::Category, int >

5.101.1 Detailed Description

Definition of the Graph class.

Author

Pavel Lakiza

Date

August 2022

5.102 [/home/qinterfly/Library/Projects/Current/RodSystem↵](#) Estimator/src/viewers/graph.h File Reference

Declaration of the Graph class.

```
#include <QString>
#include <QColor>
#include "qcustomplot.h"
#include "abstractgraphdata.h"
#include "aliasviewers.h"
#include "aliasklp.h"
#include "graphdataslicer.h"
```

Classes

- class [RSE::Viewers::Graph](#)

5.102.1 Detailed Description

Declaration of the Graph class.

Author

Pavel Lakiza

Date

August 2022

5.103 graph.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef GRAPH_H
9 #define GRAPH_H
10
11 #include <QString>
12 #include <QColor>
13 #include "qcustomplot.h"
14 #include "abstractgraphdata.h"
15 #include "aliasviewers.h"
16 #include "aliasklp.h"
17 #include "graphdataslicer.h"
18
19 namespace RSE::Viewers
20 {
21
22 using KLP::PointerResult;
23
24 class Graph
25 {
26 public:
27     Graph(QString const& name);
28     ~Graph();
29     // Getters of data properties
30     static GraphIDType maxGraphID() { return smMaxGraphID; }
31     QString const& name() const { return mName; }
32     GraphIDType id() const { return mID; }
33     AbstractGraphData** data() { return mpData; }
34     bool isData(int iData) const { return mpData[iData]; }
35     bool isDataSlicer() const { return mpDataSlicer; }
36     GraphDataSlicer& dataSlicer() const { return *mpDataSlicer; }
37     QVector<int> indicesUniqueData() const;
38     int indexTimeData() const;
39     int indexData(int iCategory, int iType = -1) const;
40     bool isTimeData() const { return indexTimeData() >= 0; }
41     // Getters of visual properties
42     QCPGraph::LineStyle lineStyle() const { return mLineStyle; }
43     uint lineWidth() const { return mLineWidth; }
44     QColor color() const { return mColor; }
45     QCPScatterStyle::ScatterShape scatterShape() const { return mScatterShape; }
46     double scatterSize() const { return mScatterSize; }
47     QString const& title() const { return mTitle; }
48     QStringList const& axesLabels() const { return mAxesLabels; }
49     // Setters of data properties
50     void setName(QString const& name) { mName = name; }
51     void setData(AbstractGraphData* pData, int iData);
52     void setData(AbstractGraphData* pData = nullptr, AbstractGraphData* pYData = nullptr,
53                 AbstractGraphData* pZData = nullptr);
54     void eraseData(int iData) { setData(nullptr, iData); }
55     bool createDataSlicer(GraphDataSlicer::SliceType type, PointerResult pResult);
56     void removeDataSlicer();
57     // Setters of visual properties
58     void setLineStyle(QCPGraph::LineStyle const& lineStyle) { mLineStyle = lineStyle; }
59     void setLineWidth(uint lineWidth) { mLineWidth = lineWidth; }
60     void setColor(QColor const& color) { mColor = color; }
61     void setScatterShape(QCPScatterStyle::ScatterShape const& scatterShape) { mScatterShape =
62         scatterShape; }
63     void setScatterSize(double scatterSize) { mScatterSize = scatterSize; }
64     void setTitle(QString const& title) { mTitle = title; }
65     void setAxisLabel(QString const& label, int iData) { mAxesLabels[iData] = label; }
66     void setAxesLabels(QString const& xLabel, QString const& yLabel, QString const& zLabel = "") {
67         mAxesLabels = { xLabel, yLabel, zLabel }; }
68
69 private:
70     QString mName;
71     GraphIDType mID;
72     // Data
73     AbstractGraphData* mpData[KLP::kNumDirections] = {nullptr, nullptr, nullptr};
74     GraphDataSlicer* mpDataSlicer = nullptr;
75     // Line options
76     QCPGraph::LineStyle mLineStyle = QCPGraph::lsLine;
77     uint mLineWidth = 1;
78     QColor mColor = Qt::blue;
79     // Scatter options
80     QCPScatterStyle::ScatterShape mScatterShape = QCPScatterStyle::ssNone;
81     double mScatterSize = 5;
82     // Title
83     QString mTitle;
84     // Axes labels
85     QStringList mAxesLabels = QStringList({" X", " Y", " Z"});
86
87 private:
88     static GraphIDType smMaxGraphID;
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916

```

```
86 };  
87  
88 }  
89  
90 #endif // GRAPH_H
```

5.104 [/home/qinterfly/Library/Projects/Current/RodSystem](#) Estimator/src/viewers/graphdataslicer.cpp File Reference

Definition of the GraphDataSlicer class.

```
#include "graphdataslicer.h"  
#include "spacetimegraphdata.h"  
#include "klp/result.h"
```

5.104.1 Detailed Description

Definition of the GraphDataSlicer class.

Author

Pavel Lakiza

Date

August 2022

5.105 [/home/qinterfly/Library/Projects/Current/RodSystem](#) Estimator/src/viewers/graphdataslicer.h File Reference

Declaration of the GraphDataSlicer class.

```
#include <QObject>  
#include "aliasklp.h"  
#include "aliasviewers.h"
```

Classes

- class [RSE::Viewers::GraphDataSlicer](#)

5.105.1 Detailed Description

Declaration of the GraphDataSlicer class.

Author

Pavel Lakiza

Date

August 2022

5.106 graphdataslicer.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef GRAPHDATASLICER_H
9 #define GRAPHDATASLICER_H
10
11 #include <QObject>
12 #include "aliasklp.h"
13 #include "aliasviewers.h"
14
15 namespace RSE::Viewers
16 {
17
18 class AbstractGraphData;
19
20 class GraphDataSlicer : public QObject
21 {
22     Q_OBJECT
23
24 public:
25     enum SliceType
26     {
27         sdX,
28         sdY,
29         sdZ
30     };
31     Q_ENUM(SliceType)
32     GraphDataSlicer(SliceType type, AbstractGraphData const* pData, KLP::PointerResult pResult);
33     // Getters
34     SliceType type() const { return mType; }
35     qint64 index() const { return mIndex; }
36     float value() const { return mDataset[mIndex]; }
37     std::pair<qint64, qint64> limitsIndices() const { return mLimitsIndices; }
38     std::pair<float, float> limitsValues() const { return mLimitsValues; }
39     bool isTime() const { return mIsTime; }
40     // Setters
41     void setResult(KLP::PointerResult pResult);
42     void setIndex(qint64 index);
43     float setClosestValue(float searchValue);
44
45 private:
46     void setLimits();
47
48 private:
49     SliceType const mType;
50     AbstractGraphData const* mpData;
51     qint64 mIndex;
52     GraphDataset mDataset;
53     std::pair<qint64, qint64> mLimitsIndices;
54     std::pair<float, float> mLimitsValues;
55     bool mIsTime;
56 };
57
58 }
59
60 #endif // GRAPHDATASLICER_H

```

5.107 /home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/viewers/graphlistmodel.cpp File Reference

Definition of the GraphListModel class.

```

#include <QListView>
#include "graphlistmodel.h"
#include "graph.h"

```

5.107.1 Detailed Description

Definition of the GraphListModel class.

Author

Pavel Lakiza

Date

July 2022

5.108 `/home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/viewers/graphlistmodel.h` File Reference

Declaration of the GraphListModel class.

```
#include <QStandardItemModel>
#include "aliasviewers.h"
```

Classes

- class [RSE::Models::GraphListModel](#)

5.108.1 Detailed Description

Declaration of the GraphListModel class.

Author

Pavel Lakiza

Date

July 2022

5.109 `graphlistmodel.h`

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef GRAPHLISTMODEL_H
9 #define GRAPHLISTMODEL_H
10
11 #include <QStandardItemModel>
12 #include "aliasviewers.h"
13
14 namespace RSE
15 {
16
17     namespace Models
18     {
19
20         class GraphListModel : public QStandardItemModel
21         {
22             Q_OBJECT
23
24         public:
25             GraphListModel(Viewers::MapGraphs& graphs, QObject* pParent = nullptr);
```

```

26     void create();
27     void updateContent();
28     void removeSelected();
29     void selectItem(int iSelect = -1);
30
31 private:
32     void clearContent();
33     void renameItem(QStandardItem* pItem);
34
35 private:
36     Viewers::MapGraphs& mGraphs;
37 };
38
39 }
40
41 }
42
43 #endif // GRAPHLISTMODEL_H

```

5.110 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/kinematicsgraphdata.cpp File Reference

Definition of the KinematisGraphData class.

```

#include "kinematicsgraphdata.h"
#include "klp/framecollection.h"

```

5.110.1 Detailed Description

Definition of the KinematisGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.111 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/kinematicsgraphdata.h File Reference

Declaration of the KinematisGraphData class.

```

#include "abstractgraphdata.h"

```

Classes

- class [RSE::Viewers::KinematicsGraphData](#)
Class to deal with kinematics of KLP-data.

5.111.1 Detailed Description

Declaration of the KinematisGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.112 kinematicsgraphdata.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef KINEMATICSGRAPHDATA_H
9 #define KINEMATICSGRAPHDATA_H
10
11 #include "abstractgraphdata.h"
12
13 namespace RSE::Viewers
14 {
15
16
17 class KinematicsGraphData : public AbstractGraphData
18 {
19     Q_OBJECT
20
21 public:
22     enum KinematicsType
23     {
24         kStrain,
25         kDisplacement,
26         kRotation,
27         kSpeed,
28         kAngularSpeed,
29         kAcceleration,
30         kAngularAcceleration
31     };
32     Q_ENUM(KinematicsType)
33     KinematicsGraphData(KinematicsType type, Direction direction = Direction::dFull);
34     ~KinematicsGraphData() = default;
35     GraphDataset getDataset(KLP::FrameCollection const& collection, qint64 sliceIndex) const override;
36     int type() const override { return mType; }
37
38 private:
39     KinematicsType mType;
40 };
41
42 }
43
44 #endif // KINEMATICSGRAPHDATA_H

```

5.113 /home/qinterfly/Library/Projects/Current/RodSystem← Estimator/src/viewers/klpgraphviewer.cpp File Reference

Definition of the KLPGraphViewer class.

```

#include <QSettings>
#include <QTextEdit>
#include <Q3DSurface>
#include <QSurfaceDataProxy>
#include <QSurface3DSeries>
#include "DockManager.h"

```

```
#include "DockWidget.h"
#include "DockAreaWidget.h"
#include "ads_globals.h"
#include "central/uiconstants.h"
#include "klp/result.h"
#include "apputilities.h"
#include "klpgraphviewer.h"
#include "figuremanager.h"
#include "resultlistmodel.h"
#include "graphlistmodel.h"
#include "graph.h"
#include "extendedgraphplot.h"
```

Typedefs

- using **CurveData** = QPair< QVector< GraphDataset >, QVector< int > >
- using **SurfaceData** = QPair< QSurfaceDataArray *, QVector< int > >

Functions

- CurveData **getCurveData** (PointerGraph const pGraph, PointerResult const pResult, QVector< int > const &indicesData)
Helper function to retrieve data associated with a 2D-curve.
- SurfaceData **getSurfaceData** (PointerGraph const pGraph, PointerResult const pResult)
Helper function to retrieve data associated with a surface.
- QLinearGradient **getCustomGradient** ()
Retrieve a custom gradient for the 3D-plot.

5.113.1 Detailed Description

Definition of the KLPGraphViewer class.

Author

Pavel Lakiza

Date

August 2022

5.114 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/klpgraphviewer.h File Reference

Declaration of the KLPGraphViewer class.

```
#include "klp/aliasklp.h"
#include "aliasviewers.h"
#include "propertytreewidget.h"
```

Classes

- class [RSE::Viewers::KLPGraphViewer](#)
Class to graphically represent content of KLP output files.

5.114.1 Detailed Description

Declaration of the KLPGraphViewer class.

Author

Pavel Lakiza

Date

August 2022

5.115 klpgraphviewer.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef KLPGRAPHVIEWER_H
9 #define KLPGRAPHVIEWER_H
10
11 #include "klp/aliasklp.h"
12 #include "aliasviewers.h"
13 #include "propertytreewidget.h"
14
15 QT_BEGIN_NAMESPACE
16 class QSettings;
17 class QListView;
18 class QTextEdit;
19 QT_END_NAMESPACE
20
21 namespace ads
22 {
23     class CDockManager;
24     class CDockWidget;
25 }
26
27 namespace KLP
28 {
29     class ResultInfo;
30 }
31
32 namespace RSE
33 {
34
35     namespace Models
36     {
37         class ResultListModel;
38         class GraphListModel;
39     }
40
41     namespace Viewers
42     {
43
44         class FigureManager;
45         class PropertyTreeWidget;
46
47         class KLPGraphViewer : public QWidget
48         {
49             Q_OBJECT
50
51         public:
52             KLPGraphViewer(QString const& lastPath, QSettings& settings, QWidget* pParent = nullptr);
53             ~KLPGraphViewer();
54             // Results
55             void openResultsDialog();
56             void openResults(QStringList const& locationFiles);
57

```



```

58     // Graphs
59     void setGraphs(MapGraphs&& graphs);
60     void plot();
61
62 private:
63     // Content
64     void initialize();
65     void createContent();
66     ads::CDockWidget* createResultWidget();
67     ads::CDockWidget* createFigureWidget();
68     ads::CDockWidget* createConstructorWidget();
69     ads::CDockWidget* createPropertyWidget();
70     // Results
71     void processSelectedResults();
72     void showResultInfo(KLP::ResultInfo const& info);
73     // Graphs
74     void processSelectedGraphs();
75     // Settings
76     void saveSettings();
77     void restoreSettings();
78     void closeEvent(QCloseEvent* pEvent) override;
79     // Plotting
80     void plotCurve(PointerGraph const pGraph, PointerResult const pResult, bool isCompareResults);
81     void plotSurface(PointerGraph const pGraph, PointerResult const pResult, bool isCompareResults);
82
83 private:
84     QString mLastPath;
85     QSettings& mSettings;
86     // GUI
87     ads::CDockManager* mpDockManager = nullptr;
88     FigureManager* mpFigureManager = nullptr;
89     QListView* mpListResults;
90     QTextEdit* mpTextInfo;
91     QListView* mpListGraphs;
92     RSE::Viewers::PropertyTreeWidget* mpPropertyTreeWidget;
93     // Models
94     RSE::Models::ResultListModel* mpResultListModel;
95     RSE::Models::GraphListModel* mpGraphListModel;
96     // Data
97     KLP::Results mResults;
98     MapGraphs mGraphs;
99 };
100
101 }
102
103 }
104
105 #endif // KLPGRAPHVIEWER_H

```

5.116 /home/qinterfly/Library/Projects/Current/RodSystemEstimator/src/viewers/propertytreewidget.cpp File Reference

Definition of the PropertyTreeWidget class.

```

#include <QMetaEnum>
#include <QComboBox>
#include <QSpinBox>
#include <QSlider>
#include <QHeaderView>
#include "propertytreewidget.h"
#include "klp/result.h"
#include "graph.h"
#include "abstractgraphdata.h"
#include "spacetimegraphdata.h"
#include "kinematicsgraphdata.h"
#include "energygraphdata.h"
#include "estimationgraphdata.h"

```

5.116.1 Detailed Description

Definition of the PropertyTreeWidget class.

Author

Pavel Lakiza

Date

August 2022

5.117 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/propertytreewidget.h File Reference

Declaration of the PropertyTreeWidget class.

```
#include <QTreeWidget>
#include "aliasklp.h"
#include "aliasviewers.h"
```

Classes

- class [RSE::Viewers::PropertyTreeWidget](#)

Typedefs

- using **RSE::Viewers::EnumData** = QPair< QStringList, QList< QIcon > >

5.117.1 Detailed Description

Declaration of the PropertyTreeWidget class.

Author

Pavel Lakiza

Date

August 2022

5.118 propertytreewidget.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef PROPERTYTREWIDGET_H
9 #define PROPERTYTREWIDGET_H
10
11 #include <QTreeWidget>
12 #include "aliasklp.h"
13 #include "aliasviewers.h"
14
15 QT_BEGIN_NAMESPACE
16 class QComboBox;
17 class QSpinBox;
18 class QDoubleSpinBox;
19 QT_END_NAMESPACE
20
21 namespace KLP
22 {
23     class Result;
24 }
25
26 namespace RSE
27 {
28
29     namespace Viewers
30     {
31
32         using EnumData = QPair<QStringList, QList<QIcon>;
33         using KLP::PointerResult;
34
35         class PropertyTreeWidget : public QTreeWidget
36         {
37             Q_OBJECT
38
39         public:
40             PropertyTreeWidget(QWidget* pParent = nullptr);
41             void setSelectedGraph(PointerGraph pGraph);
42             void setSelectedResult(PointerResult pResult);
43
44         signals:
45             void graphChanged();
46
47         private:
48             void initialize();
49             void updateValues();
50             // Construct widgets
51             void createHierarchy();
52             QTreeWidgetItem* createDirectionalDataItem(QString const& name);
53             void createDataSlicerItem();
54             void createAxesLabelsItem();
55             void specifyConnections();
56             void setBlockedSignals(bool flag);
57             // Data and visual widgets
58             int currentDataIndex(int iData, int iChild);
59             QString currentDataText(int iData, int iChild);
60             void setTypeWidget(int iData);
61             void setDirectionWidget(int iData);
62             void setColorItem(QColor const& color);
63             // Slicer widgets
64             void resetSlicerWidgetsData();
65             void updateSlicerWidgetsData();
66             void setBlockedSlicerWidgetsSignals(bool flag);
67             // Assign new properties to the current graph
68             void assignGraphData(int iData);
69             void assignVisualProperties();
70             void assignSlicer();
71             void setSlicerIndex(qint64 index);
72             void setSlicerValue(float value);
73             // Translation of enum keys
74             EnumData getEnumData(QMetaObject const& metaObject, std::string const& nameEnumerator);
75             void makeTranslationMap();
76
77         private:
78             // Data items
79             PointerGraph mpGraph = nullptr;
80             PointerResult mpResult = nullptr;
81             QList<QTreeWidgetItem*> mDataItems;
82             QTreeWidgetItem* mpDataSlicerItem;
83             // Visual items
84             QMap<QString, QString> mEnumTranslator;
85             QComboBox* mpLineStyleWidget;
86             QSpinBox* mpLineWidthWidget;
87             QTreeWidgetItem* mpColorItem;
88             QComboBox* mpScatterShapeWidget;

```

```
89     QDoubleSpinBox* mpScatterSizeWidget;  
90     QLineEdit* mpTitleWidget;  
91     QTreeWidgetItem* mpAxesLabelsItem;  
92 };  
93  
94 }  
95  
96 }  
97  
98 #endif // PROPERTYTREETREEWIDGET_H
```

5.119 /home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/viewers/resultlistmodel.cpp File Reference

Definition of the KLPRResultListModel class.

```
#include <QFileInfo>  
#include <QListView>  
#include <QColorDialog>  
#include "apputilities.h"  
#include "resultlistmodel.h"  
#include "klp/result.h"
```

5.119.1 Detailed Description

Definition of the KLPRResultListModel class.

Author

Pavel Lakiza

Date

August 2022

5.120 /home/qinterfly/Library/Projects/Current/RodSystem↔ Estimator/src/viewers/resultlistmodel.h File Reference

Declaration of the KLPRResultListModel class.

```
#include <QStandardItemModel>  
#include "klp/aliasklp.h"
```

Classes

- class [RSE::Models::ResultListModel](#)

5.120.1 Detailed Description

Declaration of the KLPResultListModel class.

Author

Pavel Lakiza

Date

August 2022

5.121 resultlistmodel.h

[Go to the documentation of this file.](#)

```

1
2
3
4
5
6
7
8 #ifndef RESULTLISTMODEL_H
9 #define RESULTLISTMODEL_H
10
11 #include <QStandardItemModel>
12 #include "klp/aliasklp.h"
13
14 namespace RSE
15 {
16
17     namespace Models
18     {
19
20         class ResultListModel : public QStandardItemModel
21         {
22             Q_OBJECT
23
24         public:
25             ResultListModel(KLP::Results& results, QObject* pParent = nullptr);
26             void updateData();
27             void updateContent();
28             void removeSelected();
29             void selectItem(int iSelect = -1);
30             QColor resultColor(KLP::PointerResult pResult) const { return mResultColors[pResult.get()]; }
31
32         signals:
33             void resultsUpdated();
34
35         private:
36             void clearContent();
37             QColor getAvailableColor();
38             void specifyConnections();
39
40         private:
41             KLP::Results& mResults;
42             QMap<KLP::Result*, QColor> mResultColors;
43     };
44
45 }
46
47 }
48
49 #endif // RESULTLISTMODEL_H

```

5.122 /home/qinterfly/Library/Projects/Current/RodSystem↵ Estimator/src/viewers/spacetimegraphdata.cpp File Reference

Definition of the SpaceTimeGraphData class.

```

#include "spacetimegraphdata.h"
#include "klp/framecollection.h"

```

5.122.1 Detailed Description

Definition of the SpaceTimeGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.123 [/home/qinterfly/Library/Projects/Current/RodSystem↔](#) Estimator/src/viewers/spacetimegraphdata.h File Reference

Declaration of the SpaceTimeGraphData class.

```
#include "abstractgraphdata.h"
```

Classes

- class [RSE::Viewers::SpaceTimeGraphData](#)
Class to deal with spacetime KLP-data.

5.123.1 Detailed Description

Declaration of the SpaceTimeGraphData class.

Author

Pavel Lakiza

Date

August 2022

5.124 spacetimegraphdata.h

[Go to the documentation of this file.](#)

```
1
2
3
4
5
6
7
8 #ifndef SPACETIMEGRAPHDATA_H
9 #define SPACETIMEGRAPHDATA_H
10
11 #include "abstractgraphdata.h"
12
13 namespace RSE::Viewers
14 {
15
16
17 class SpaceTimeGraphData : public AbstractGraphData
18 {
19     Q_OBJECT
20
21 public:
22     enum SpaceTimeType
23     {
24         stTime,
25         stParameter,
26         stNaturalLength,
27         stAccumulatedNaturalLength,
28         stCoordinate
29     };
30     Q_ENUM(SpaceTimeType)
31     SpaceTimeGraphData(SpaceTimeType type, Direction direction = Direction::dFull);
32     ~SpaceTimeGraphData() = default;
33     GraphDataset getDataset(KLP::FrameCollection const& collection, quint64 sliceIndex) const override;
34     int type() const override { return mType; }
35
36 private:
37     SpaceTimeType mType;
38 };
39
40 }
41
42 #endif // SPACETIMEGRAPHDATA_H
```

