

2021–
2025

Virtual mitigation of coherent non-adiabatic transitions by echo verification

Benjamin F. Schiffer[1], Dyon van Vreumingen[2,3], Jordi Tura[4], and Stefano Polla[4,5]

[1]Max-Planck-Institut für Quantenoptik, Hans-Kopfermann-Str. 1, D-85748 Garching, Germany
[2]Institute of Physics, University of Amsterdam, Science Park 904, 1098 XH Amsterdam, The Netherlands
[3]QuSoft, Centrum Wiskunde & Informatica (CWI), Science Park 123, 1098 XG Amsterdam, The Netherlands
[4]Instituut-Lorentz, Universiteit Leiden, P.O. Box 9506, 2300 RA Leiden, The Netherlands
[5]Google Quantum AI, 80636 München, Germany

arXiv:2307.10358v4 [quant-ph] 5 Sep 2024

Transitions out of the ground space limit the performance of quantum adiabatic algorithms, while hardware imperfections impose stringent limitations on the circuit depth. We propose an adiabatic echo verification protocol which mitigates both coherent and incoherent errors, arising from non-adiabatic transitions and hardware noise, respectively. Quasi-adiabatically evolving forward and backward allows for an echo-verified measurement of any observable. In addition to mitigating hardware noise, our method uses positive-time dynamics only. Crucially, the estimator bias of the observable is reduced when compared to standard adiabatic preparation, achieving up to a quadratic improvement.

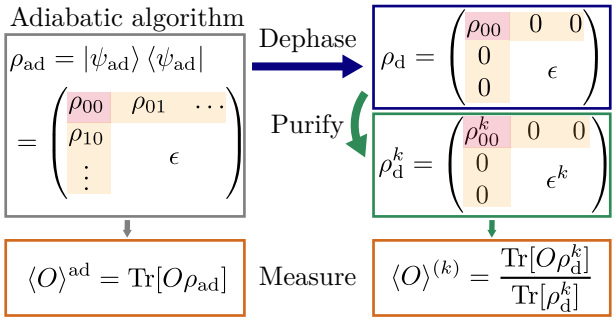


Figure 1: Schematic overview of the method. Density matrices are expressed in the energy eigenbasis of the target Hamiltonian. The pure state after the adiabatic evolution (ρ_{ad}) approximates the true ground state. Via a dephasing operation, the coherent error is promoted to an incoherent error in ρ_{d} such that error mitigation techniques can be applied. This allows measuring the kth degree purified observable $\langle O\rangle^{(k)}$ which yields a lower bias than evaluating the state directly after the adiabatic preparation $\left[\langle O\rangle^{\mathrm{ad}}\right]$.

1 Introduction

The study of quantum many-body systems requires the precise estimation of observables. Quantum state preparation is naturally a prerequisite to this end, which is the rationale behind quantum computers or quantum simulators. The adiabatic algorithm has demonstrated large success in a variety of platforms [1, 2]. Still, the performance of current devices is hindered by noise, which cannot be error corrected, yet. Therefore, error mitigation techniques have been explored both theoretically and experimentally and can significantly improve the estimation of observables [3–5]. Surprisingly, there have been few synergies jointly considering error mitigation for the adiabatic algorithm.

Any quantum circuit can be efficiently simulated by the adiabatic algorithm [6]. In adiabatic quantum computation, the system is initialized in the ground state of a trivial Hamiltonian and one seeks to prepare the ground state of the final Hamiltonian by slowly interpolating between the two. The success of the algorithm is determined by the speed of the adiabatic passage and spectral properties of the Hamiltonians [7, 8]. More precisely, the total evolution time, or circuit depth, depends inverse polynomially on the minimum spectral gap between the ground state and the first excited state along the adiabatic path. These relations are quantified by the adiabatic theorem

Benjamin F. Schiffer: benjamin.schiffer@mpq.mpg.de
Dyon van Vreumingen: d.vanvreumingen@uva.nl
Jordi Tura: tura@lorentz.leidenuniv.nl
Stefano Polla: polla@lorentz.leidenuniv.nl