

2022–
2024

Distinguishing Graph States by the Properties of Their Marginals

Lina Vandré*,[1] Jarn de Jong*,[2] Frederik Hahn,[2] Adam Burchardt,[3] Otfried Gühne,[1] and Anna Pappa[2]

[1] *Naturwissenschaftlich-Technische Fakultät, Universität Siegen, Walter-Flex-Straße 3, 57068 Siegen, Germany*
[2] *Electrical Engineering and Computer Science Department, Technische Universität Berlin, 10587 Berlin, Germany*
[3] *QuSoft, CWI and University of Amsterdam, Science Park 123, 1098 XG Amsterdam, the Netherlands*

(Dated: June 12, 2025)

Graph states are a class of multi-partite entangled quantum states that are ubiquitous in quantum information. We study equivalence relations between graph states under local unitaries (LU) to obtain distinguishing methods both in local and in networked settings. Based on the marginal structure of graph states, we introduce a family of easy-to-compute LU-invariants. We show that these invariants uniquely identify the entanglement classes of every graph state up to 8 qubits and discuss their reliability for larger numbers of qubits. To handle larger graphs, we generalize tools to test for local Clifford (LC) equivalence of graph states that work by condensing large graphs into smaller graphs. In turn, we show that statements on the equivalence of these smaller graphs (which are easier to compute) can be used to infer statements on the equivalence of the original, larger graphs. We analyze LU-equivalence in two key settings - with and without allowing for the permutation of qubits. We identify entanglement classes, whose marginal structure does not allow us to distinguish them. As a result, we increase the bound on the number of qubits where the LU-LC conjecture holds from 8 to 10 qubits in the setting where qubit permutations are allowed.

arXiv:2406.09956v2 [quant-ph] 11 Jun 2025

I. INTRODUCTION

Multipartite entanglement plays an important role in many applications of quantum information; it is used for example to generate secret keys between multiple parties in quantum networks [1] and as a resource for measurement based quantum computing [2] and error correction [3] schemes. However, characterizing entanglement between more than three parties is not at all straightforward [4, 5]. A fundamental challenge is that the size of the density matrix increases exponentially with the number of parties, making it difficult to simulate large entangled states on classical computers.

Graph states [6] are a subset of multipartite entangled states with useful properties. They have a convenient graphical representation, and, even though they are not as computationally hard to classically simulate as general entangled states, they are used in many of the above-mentioned applications. Graph states can be treated with respect to associated graphs; the association between graphs and graph states (Fig. 1) will be analyzed later.

In general, the protocols that use entangled states implement specific operations that can be classified as either local or global. Local operations affect single qubits and are easier to perform. In contrast, global operations target multiple qubits. They are more involved and especially require them to be in close proximity to be feasible. In scenarios such as key generation, where participants are separated by distance, one is typically limited to local operations. In such remote settings, it is relevant to determine whether a given entangled state can be transformed into a different state by applying local operations,

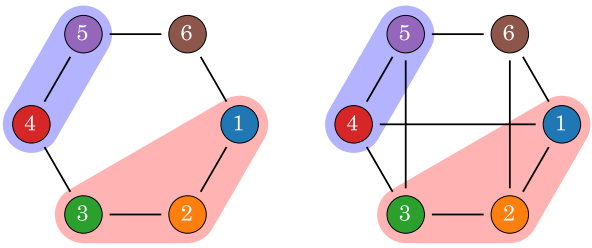


Figure 1. *Graph states* are a certain kind of multipartite entangled states where qubits are represented by nodes of a graph, and the graphs' edges represent entangling gates. We are interested in finding out which graphs correspond to states that share the same entanglement properties, or more precise, if they are equivalent under local unitary operations. In our methods of determining equivalence an integer number d can be assigned to every subset of nodes, which is necessarily the same if the corresponding states have the same entanglement properties. The subsets highlighted in purple have the same number $d_{\{4,5\}}$ for both graphs in the figure, so no conclusion can be drawn yet. However the two graphs have different number $d_{\{1,2,3\}}$ for the subsets highlighted in red. Thus, the two associated graph states cannot be equivalent under local unitary operations.

possibly assisted by classical communication, a setting commonly known as *LOCC*, or *SLOCC* when stochastic transformations are considered that succeed with a non-unit probability. In a first approximation, one can consider merely the set of local unitary (LU) operations, which do not make use of communication between the parties, neither quantum nor classical. In scenarios such as quantum computing, which are carried out at one location, the set of operations may still be limited. Single qubit gates in general have a much better fidelity than multi qubit gates [7]. Furthermore, unitary operations

*These authors contributed equally to this work.