


2016–
2021

arXiv:2108.02175v3 [quant-ph] 23 Dec 2022

Variational quantum eigensolver for the Heisenberg antiferromagnet on the kagome lattice

Joris Kattemölle[1,2,3] and Jasper van Wezel[1,2]

[1] *Institute for Theoretical Physics, University of Amsterdam, Science Park 904, Amsterdam, Netherlands*
[2] *QuSoft, CWI, Science Park 123, Amsterdam, Netherlands*
[3] *Department of Physics, University of Konstanz, D-78457 Konstanz, Germany*

Establishing the nature of the ground state of the Heisenberg antiferromagnet (HAFM) on the kagome lattice is well known to be a prohibitively difficult problem for classical computers. Here, we give a detailed proposal for a Variational Quantum Eigensolver (VQE) intending to solve this physical problem on a quantum computer. At the same time, this VQE constitutes an explicit experimental proposal for showing a useful quantum advantage on Noisy Intermediate-Scale Quantum (NISQ) devices because of its natural hardware compatibility. We classically emulate noiseless and noisy quantum computers with either 2D-grid or all-to-all connectivity and simulate patches of the kagome HAFM of up to 20 sites. In the noiseless case, the ground-state energy, as found by the VQE, approaches the true ground-state energy exponentially as a function of the circuit depth. Furthermore, VQEs for the HAFM on any graph can inherently perform their quantum computations in a decoherence-free subspace that protects against collective longitudinal and collective transversal noise, adding to the noise-resilience of these algorithms. Nevertheless, the extent of the effects of other noise types suggests the need for error mitigation and performance targets alternative to high-fidelity ground-state preparation, even for essentially hardware-native VQEs.

I. INTRODUCTION

Despite decades of developments in numerical methods, the ground-state properties of the Heisenberg antiferromagnet (HAFM) on the kagome lattice (Fig. 1) remain elusive, owing to its geometrical frustration. The kagome HAFM is the prime candidate for exhibiting a new phase of magnetism, the quantum spin liquid (QSL) [1–3], and forms a model for the magnetic properties of minerals like Herbertsmithite [4]. Approaches towards solving this ground-state problem include exact diagonalization of finite-size patches [5] and the density matrix renormalization group (DMRG) method [2]. Next to the QSL, a Valence Bond Crystal (VBC) has been proposed as the ground state of the kagome HAFM [6–10]. (See Ref. [5] and references therein for a more complete overview of the techniques and proposals.) All classical methods for finding the ground state of the kagome HAFM are ultimately limited, for example by the inability to treat large patches (exact diagonalization), or the inability to describe highly entangled states (DMRG).

Quantum computation is a new player in this field that brings with it entirely novel possibilities. One method for finding ground states on a quantum computer is the Variational Quantum Eigensolver (VQE) [11, 12]. VQEs are especially suited for Noisy Intermediate-Scale Quantum (NISQ) [13] devices because of their relatively mild circuit depth requirements and inherent noise resilience [11, 12, 14, 15]. A VQE is a variational method. What sets the VQE apart from classical variational methods is that the parametrized state is obtained by applying a parametrized quantum circuit to some easy-to-prepare reference state of the quantum computer's register. The energy of the resulting state is obtained by performing measurements on many copies of that state. (Generally, the classical simulation of state preparation and measurement is intractable.) Parameter variation and optimization are still performed by a classical routine. So, a VQE can be seen as a classical variational method that uses a quantum computer as a subroutine for its function calls to the energy landscape.

Quantum computers can already outperform classical computers, and have hence obtained what is called quantum supremacy or a quantum advantage [16, 17]. However, the tasks for which quantum computers can currently outperform classical computers have no known application; these tasks were designed purely for showing a quantum advantage. The milestone of a *useful* quantum advantage, where a quantum computer performs a useful task that cannot be performed on any classical computer, is still ahead [16, 17].

In this paper, we design a VQE for the kagome HAFM

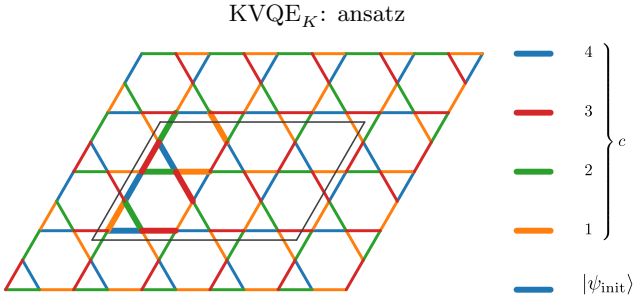


Figure 1. The kagome lattice, with edges colored according to a minimal edge coloring with the smallest possible coloring unit cell (thicker lines). The ansatz of KVQE$_K$, with initial state $|\psi_{\text{init}}\rangle$ and circuit cycle c, is derived from this edge coloring by identifying every subset of edges having the same color with a layer of parametrized gates. The gray parallelogram delineates a periodic patch that is simulated in this paper.