

2022–
2024

arXiv:2410.03961v2 [quant-ph] 12 Feb 2025

Algorithm to Verify Local Equivalence of Stabilizer States

Adam Burchardt,[1,*] Jarn de Jong,[2] and Lina Vandré[3]

[1] *QuSoft, CWI and University of Amsterdam, Science Park 123, 1098 XG Amsterdam, the Netherlands*
[2] *Electrical Engineering and Computer Science Department, Technische Universität Berlin, 10587 Berlin, Germany*
[3] *Naturwissenschaftlich-Technische Fakultät, Universität Siegen, Walter-Flex-Straße 3, 57068 Siegen, Germany*

(Dated: February 14, 2025)

We present an algorithm for verifying the local unitary (LU) equivalence of graph and stabilizer states. Our approach reduces the problem to solving a system of linear equations in modular arithmetic. Furthermore, we demonstrate that any LU transformation between two graph states takes a specific form, naturally generalizing the class of local Clifford (LC) transformations. Lastly, using existing libraries, we verify that for up to $n = 11$, the number of LU and LC orbits of stabilizer states is identical.

I. INTRODUCTION

Stabilizer states are a key class of pure multipartite states, which are powerful resources for various quantum tasks and are efficiently implementable [1–5]. A notable subclass of stabilizer states are graph states, which can be visually represented by graphs: vertices correspond to qubits, and edges represent controlled two-qubit operations used in their experimental realization on quantum computers [6–9].

Entanglement properties are independent of the local basis which motivates to study local unitary (LU) equivalence of states. LU equivalent states are useful for exactly the same tasks. For graph states it has turned out that two different graphs may describe the same state up to LU operations [10].

A natural subclass of LU operations on both stabilizer and graph states are local Clifford (LC) operations, which are fault-tolerant and easy to implement, making them well-suited for current quantum hardware [10–14]. Additionally, there is an efficient algorithm for verifying LC equivalence between two stabilizer states, with a complexity of $\mathcal{O}(n^4)$ in the number of qubits n [15–17].

For a long time, it was conjectured that all local unitary (LU) transformations on stabilizer states could be implemented via LC operations [18, 19]. This hypothesis, known as the "LU=LC conjecture", represents a key open problem concerning the entanglement structure of stabilizer states [20]. Early work supported the conjecture for large subclasses of stabilizer states and linked it to quadratic forms [21]. It was shown to hold for graph states of up to 9 qubits [22, 23]. However, a numerical search uncovered a counterexample involving 27 qubits, which remains the smallest known example of such graphs to date [24]. Subsequently, a more systematic approach for constructing pairs of graph states that are LU-equivalent but not LC-equivalent was proposed [25, 26].

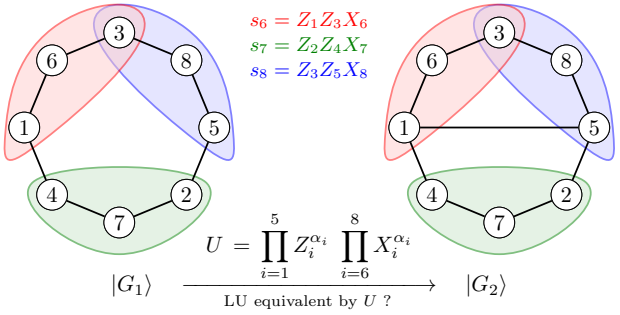


Figure 1: Examples of two graph states that are not LU-equivalent. There exists an efficient algorithm exists to verify LC-equivalence between any two graph states. This paper introduces an algorithm to verify LU-equivalence between graph states, which appears efficient in practice. Using this algorithm, we verify that for $n \leq 11$, no instances of LU- but not LC-equivalent graph states are found. The algorithm relies on the following observations: using minimal local sets and corresponding stabilizers, we show that any LU-equivalence must have a very specific form. Subsequently, verification of the existence of such an equivalence can be reduced to solving a linear system of equations.

In this paper, we introduce an algorithm to verify LU equivalence between any two stabilizer states. Since any stabilizer state is LC equivalent to a graph state [10], we can restrict our problem to determining LU equivalence between graph states. Our algorithm is constructive: for two input graphs G and G', it either outputs the exact form of the LU equivalence between the corresponding graph states $|G\rangle$ and $|G'\rangle$, or returns "NO" if the states are not LU equivalent. It builds upon several recent results concerning graph states [23, 27–29]. While the algorithm appears borderline efficient, we do not yet have a formal proof of this statement.

As a consequence, we show that any countrexample to "LU=LC conjecture" must be of a specific form. Moreover, we show that the LU transformations between two LU equivalent graph states take a specific form that naturally generalizes the class of local Clifford (LC) opera-

* adam.burchardt.uam@gmail.com