Part 0

browser → server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/notes

server → browser: HTML-code

browser → server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/main.css

server → browser: main.css

browser → server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/main.js

server → browser: spa.js

Note: browser starts executing js-code that requests JSON data from server

browser → server: HTTP GET https://studies.cs.helsinki.fi/exampleapp/data.json

server → browser: [{ content: "HTML is easy", date: "2019-05-23" }, ...]

Note: browser executes the event handler that renders notes to display

browser → server: HTTP POST https://studies.cs.helsinki.fi/exampleapp/new_note_spa
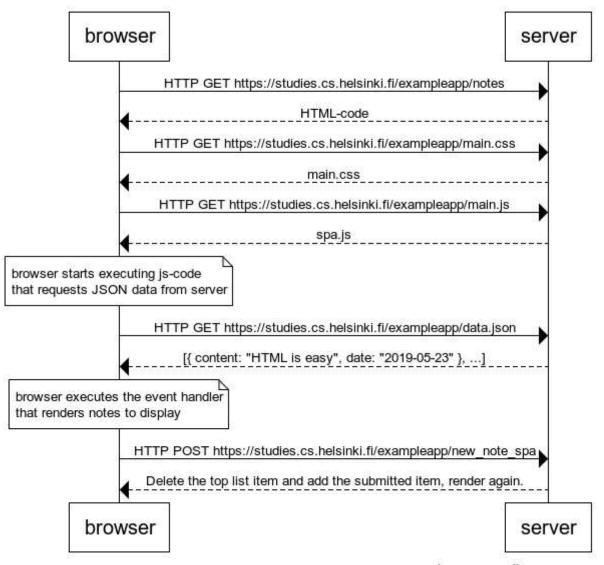
server → browser: Delete the top list item and add the submitted item, render again.

www.websequencediagrams.com