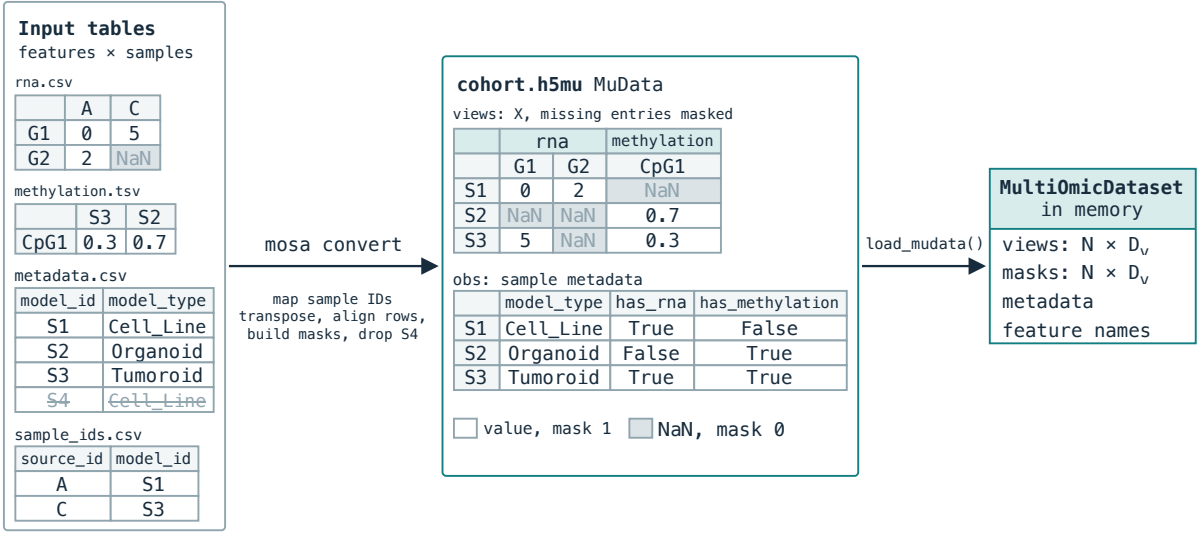


Input tables
features × samples

rna.csv

	A	C
G1	0	5
G2	2	NaN

methylation.tsv

	S3	S2
CpG1	0.3	0.7

metadata.csv

model_id	model_type
S1	Cell_Line
S2	Organoid
S3	Tumoroid
~~S4~~	~~Cell_Line~~

sample_ids.csv

source_id	model_id
A	S1
C	S3

mosa convert

map sample IDs transpose, align rows, build masks, drop S4

cohort.h5mu MuData

views: X, missing entries masked

	rna		methylation
	G1	G2	CpG1
S1	0	2	NaN
S2	NaN	NaN	0.7
S3	5	NaN	0.3

obs: sample metadata

	model_type	has_rna	has_methylation
S1	Cell_Line	True	False
S2	Organoid	False	True
S3	Tumoroid	True	True

value, mask 1 NaN, mask 0

load_mudata()

MultiOmicDataset
in memory

views: N × D_v
masks: N × D_v
metadata
feature names