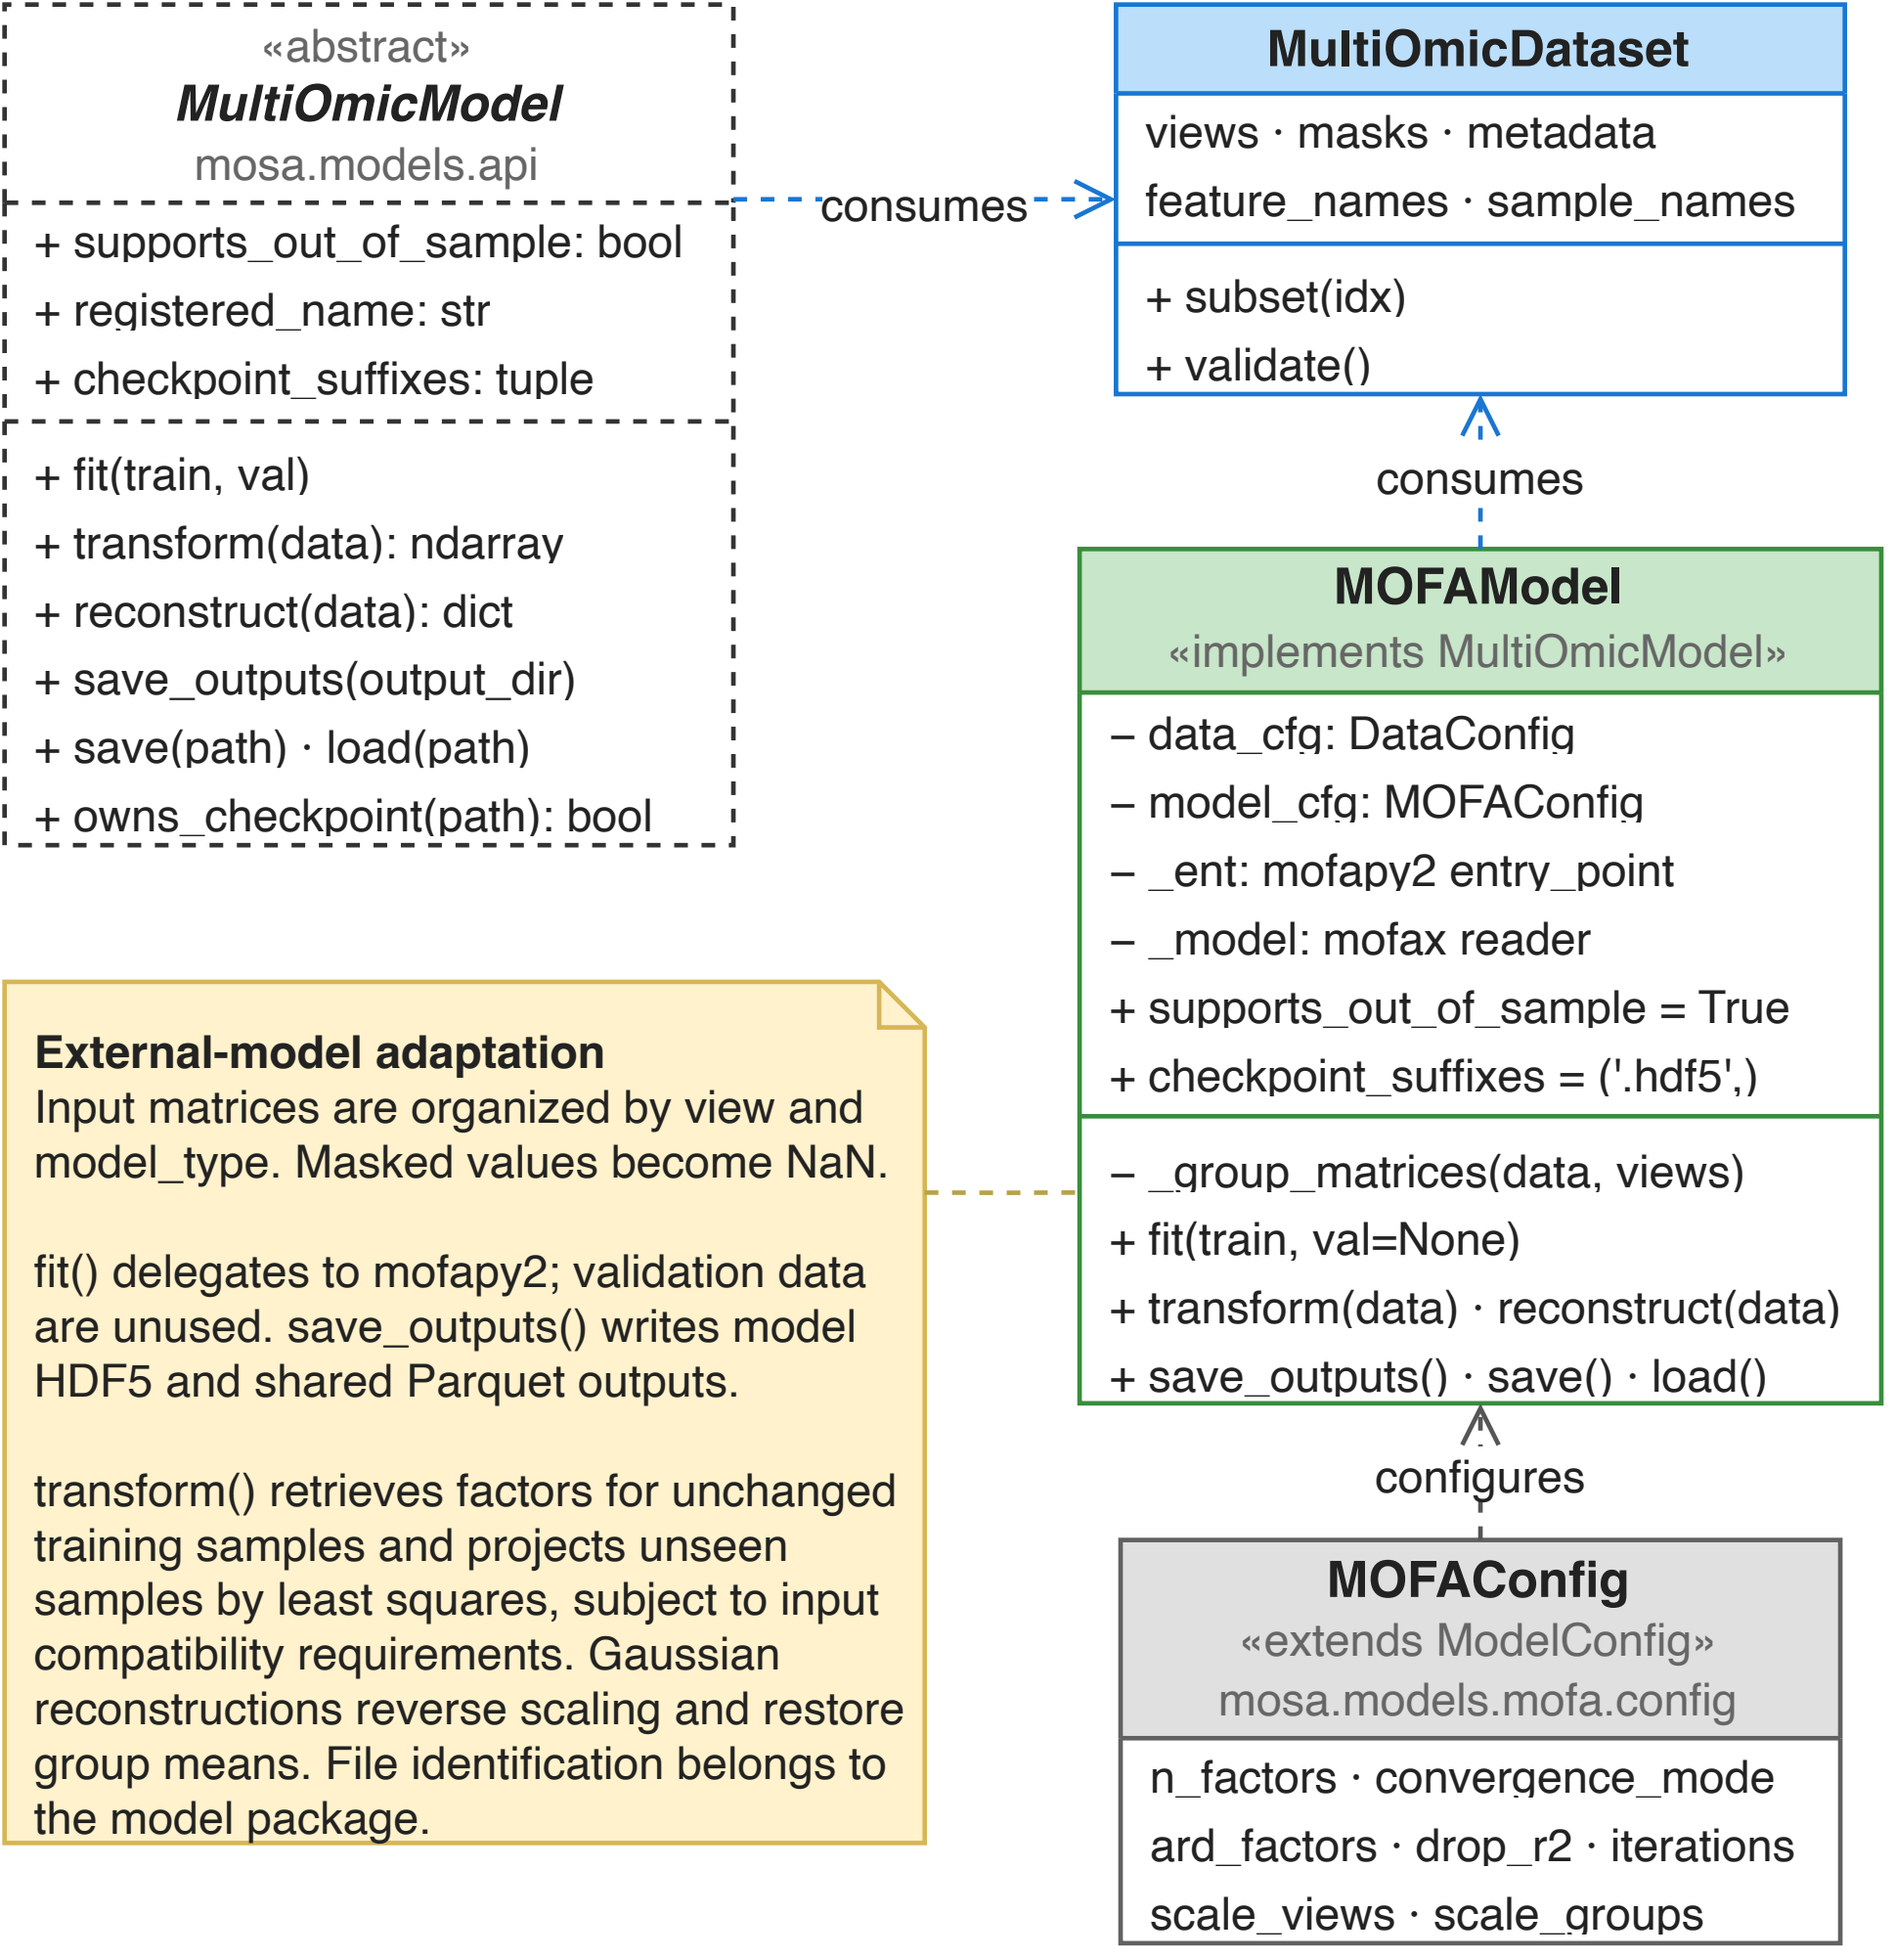
«abstract»
MultiOmicModel
mosa.models.api
+ supports_out_of_sample: bool
+ registered_name: str
+ checkpoint_suffixes: tuple
+ fit(train, val)
+ transform(data): ndarray
+ reconstruct(data): dict
+ save_outputs(output_dir)
+ save(path) · load(path)
+ owns_checkpoint(path): bool
consumes
MultiOmicDataset
views · masks · metadata
feature_names · sample_names
+ subset(idx)
+ validate()
consumes
MOFAModel
«implements MultiOmicModel»
– data_cfg: DataConfig
– model_cfg: MOFAConfig
– _ent: mofapy2 entry_point
– _model: mofax reader
+ supports_out_of_sample = True
+ checkpoint_suffixes = ('.hdf5',)
– _group_matrices(data, views)
+ fit(train, val=None)
+ transform(data) · reconstruct(data)
+ save_outputs() · save() · load()
configures
MOFAConfig
«extends ModelConfig»
mosa.models.mofa.config
n_factors · convergence_mode
ard_factors · drop_r2 · iterations
scale_views · scale_groups
External-model adaptation
Input matrices are organized by view and model_type. Masked values become NaN.
fit() delegates to mofapy2; validation data are unused. save_outputs() writes model HDF5 and shared Parquet outputs.
transform() retrieves factors for unchanged training samples and projects unseen samples by least squares, subject to input compatibility requirements. Gaussian reconstructions reverse scaling and restore group means. File identification belongs to the model package.