



# Dynamic Memory Allocation: Basic Concepts


These slides adapted from materials provided by the textbook authors.


# **Dynamic Memory Allocation**

- Basic concepts
- Implicit free lists

# **Dynamic Memory Allocation**

- Programmers use dynamic memory allocators (such as malloc) to acquire VM at run time.
  - For data structures whose size is only known at runtime.
- Dynamic memory allocators manage an area of process virtual memory known as the heap.

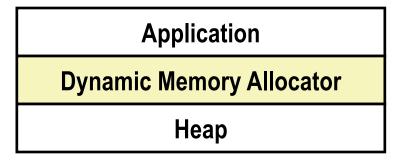

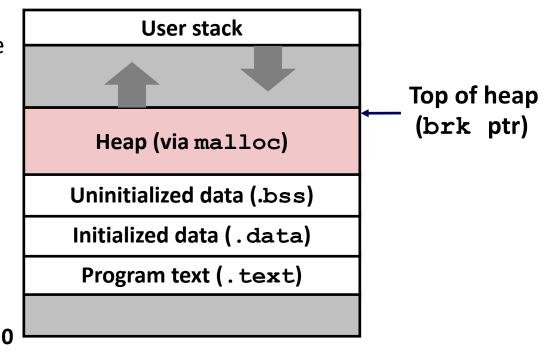

# **Dynamic Memory Allocation**

- Allocator maintains heap as collection of variable sized blocks, which are either allocated or free
- Types of allocators
  - Explicit allocator: application allocates and frees space
    - E.g., malloc and free in C
  - Implicit allocator: application allocates, but does not free space
    - E.g. garbage collection in Java, ML, and Lisp
- Will discuss simple explicit memory allocation first

# The malloc Package

```
#include <stdlib.h>
void *malloc(size_t size)
```

- Successful:
  - Returns a pointer to a memory block of at least size bytes aligned to an 8-byte (x86) or 16-byte (x86-64) boundary
  - If size == 0, returns NULL
- Unsuccessful: returns NULL (0) and sets errno

#### void free(void \*p)

- Returns the block pointed at by p to pool of available memory
- p must come from a previous call to malloc or realloc

#### Other functions


- calloc: Version of malloc that initializes allocated block to zero.
- realloc: Changes the size of a previously allocated block.
- **sbrk:** Used internally by allocators to grow or shrink the heap

### malloc Example

```
#include <stdio.h>
#include <stdlib.h>
void foo(int n) {
    int i, *p;
    /* Allocate a block of n ints */
    p = (int *) malloc(n * sizeof(int));
    if (p == NULL) {
        perror("malloc");
        exit(0);
    }
    /* Initialize allocated block */
    for (i=0; i<n; i++)
       p[i] = i;
    /* Return allocated block to the heap */
    free(p);
```


# **Assumptions Made**

- Memory is word addressed.
- Words are int-sized.

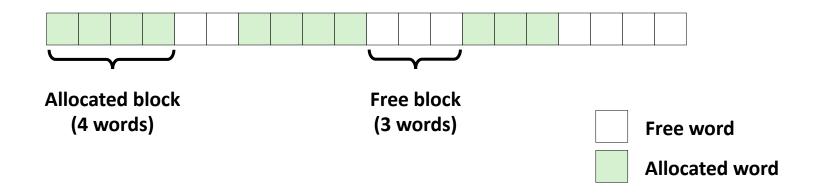

# **Allocation Example**

$$p1 = malloc(4)$$



$$p2 = malloc(5)$$




$$p3 = malloc(6)$$



free (p2)



$$p4 = malloc(2)$$



### **Constraints**

#### Applications

- Can issue arbitrary sequence of malloc and free requests
- free request must be to a malloc'd block

#### Allocators

- Can't control number or size of allocated blocks
- Must respond immediately to malloc requests
  - *i.e.*, can't reorder or buffer requests
- Must allocate blocks from free memory
  - *i.e.*, can only place allocated blocks in free memory
- Must align blocks so they satisfy all alignment requirements
  - 8-byte (x86) or 16-byte (x86-64) alignment on Linux boxes
- Can manipulate and modify only free memory
- Can't move the allocated blocks once they are malloc'd
  - i.e., compaction is not allowed

# **Performance Goal: Throughput**

- Given some sequence of malloc and free requests:
  - $R_0, R_1, ..., R_k, ..., R_{n-1}$
- Goals: maximize throughput and peak memory utilization
  - These goals are often conflicting
- Throughput:
  - Number of completed requests per unit time
  - Example:
    - 5,000 malloc calls and 5,000 free calls in 10 seconds
    - Throughput is 1,000 operations/second

# Performance Goal: Peak Memory Utilization


- Given some sequence of malloc and free requests:
  - $R_0, R_1, ..., R_k, ..., R_{n-1}$
- Def: Aggregate payload P<sub>k</sub>
  - malloc(p) results in a block with a payload of p bytes
  - After request  $R_k$  has completed, the **aggregate payload**  $P_k$  is the sum of currently allocated payloads
- Def: Current heap size H<sub>k</sub>
  - Assume  $H_k$  is monotonically nondecreasing
    - i.e., heap only grows when allocator uses sbrk
- Def: Peak memory utilization after k+1 requests
  - $U_k = (\max_{i < =k} P_i) / H_k$

# Fragmentation

- Poor memory utilization caused by fragmentation
  - internal fragmentation
  - external fragmentation

# **Internal Fragmentation**

 For a given block, internal fragmentation occurs if payload is smaller than block size

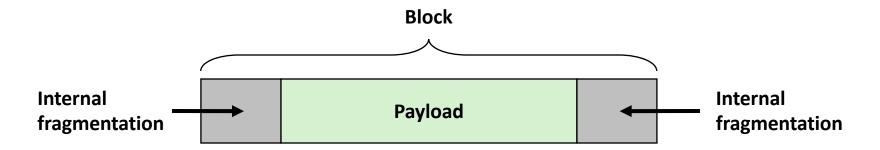


#### Caused by

- Overhead of maintaining heap data structures
- Padding for alignment purposes
- Explicit policy decisions

   (e.g., to return a big block to satisfy a small request)
- Depends only on the pattern of previous requests
  - Thus, easy to measure

# **External Fragmentation**

Occurs when there is enough aggregate heap memory,
 but no single free block is large enough

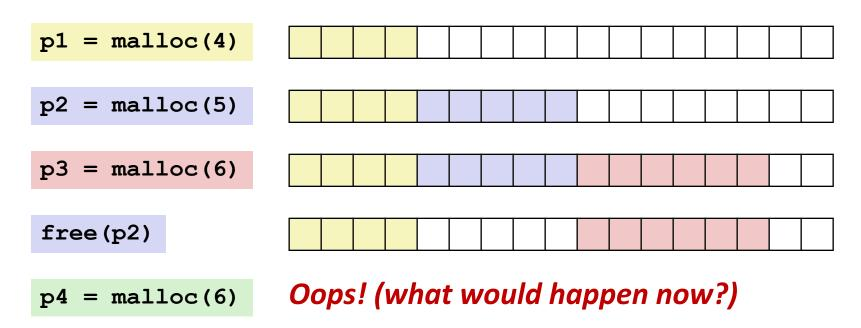

- Depends on the pattern of future requests
  - Thus, difficult to measure


# Implementation Issues

- How do we know how much memory to free given just a pointer?
- How do we keep track of the free blocks?
- What do we do with the extra space when allocating a structure that is smaller than the free block it is placed in?
- How do we pick a block to use for allocation -- many might fit?
- How do we reinsert freed block?

# **Knowing How Much to Free**

#### Standard method

- Keep the length of a block in the word preceding the block.
  - This word is often called the *header field* or *header*
- Requires an extra word for every allocated block

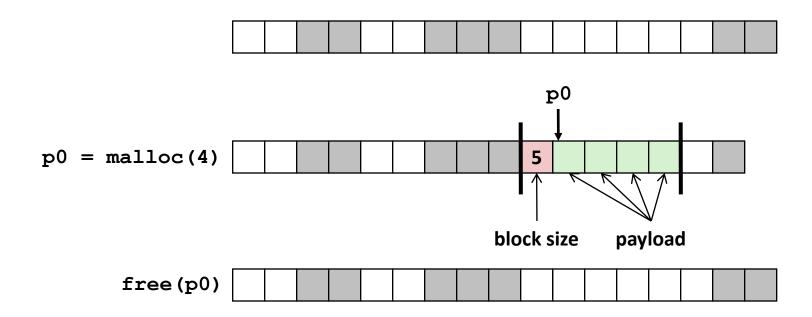

# **Keeping Track of Free Blocks**

Method 1: Implicit list using length—links all blocks



Method 2: Explicit list among the free blocks using pointers



- Method 3: Segregated free list
  - Different free lists for different size classes
- Method 4: Blocks sorted by size
  - Can use a balanced tree (e.g. Red-Black tree) with pointers within each free block, and the length used as a key