


Search



Games: Adversarial Search- Pruning

Adversarial Search (Minimax)

- Deterministic, zero-sum games:
 - Tic-tac-toe, chess, checkers
 - One player maximizes result
 - The other minimizes result
- Minimax search:
 - A state-space search tree
 - Players alternate turns
 - Compute each node's **minimax value**: the best achievable utility against a rational (optimal) adversary

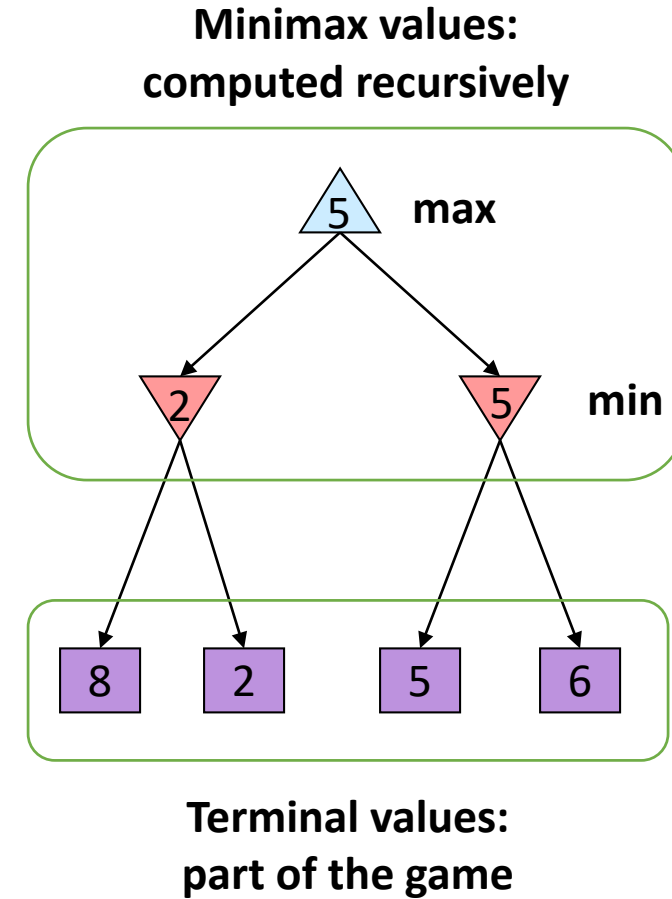

Minimax Implementation (Dispatch)

```
def value(state):
```

if the state is a terminal state: return the state's utility

if the next agent is MAX: return max-value(state)

if the next agent is MIN: return min-value(state)

```
def max-value(state):
```

initialize $v = -\infty$

for each successor of state:

$v = \max(v, \text{value}(\text{successor}))$

return v

```
def min-value(state):
```

initialize $v = +\infty$


for each successor of state:

$v = \min(v, \text{value}(\text{successor}))$


return v

Minimax Efficiency


- How efficient is minimax?
 - Just like (exhaustive) DFS
 - Time: $O(b^m)$
 - Space: $O(bm)$
- Example: For chess, $b \approx 35$, $m \approx 100$
 - Exact solution is completely infeasible
 - But, do we need to explore the whole tree?

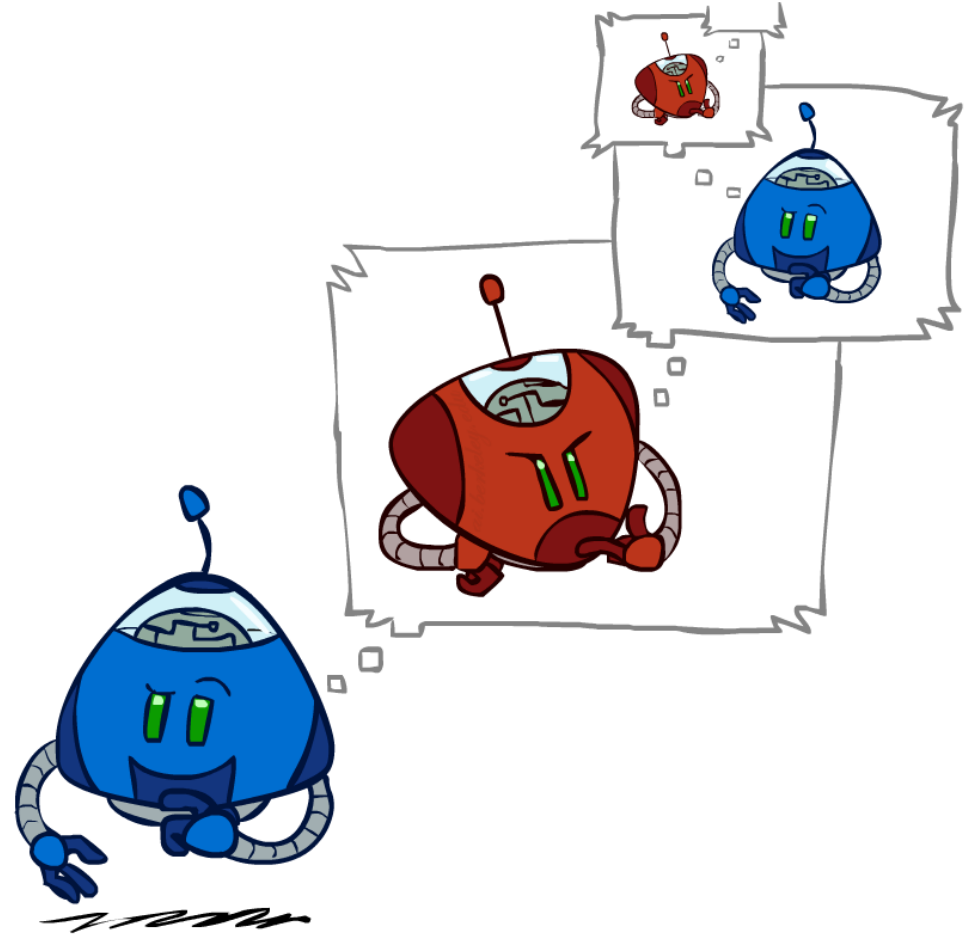

Minimax Example

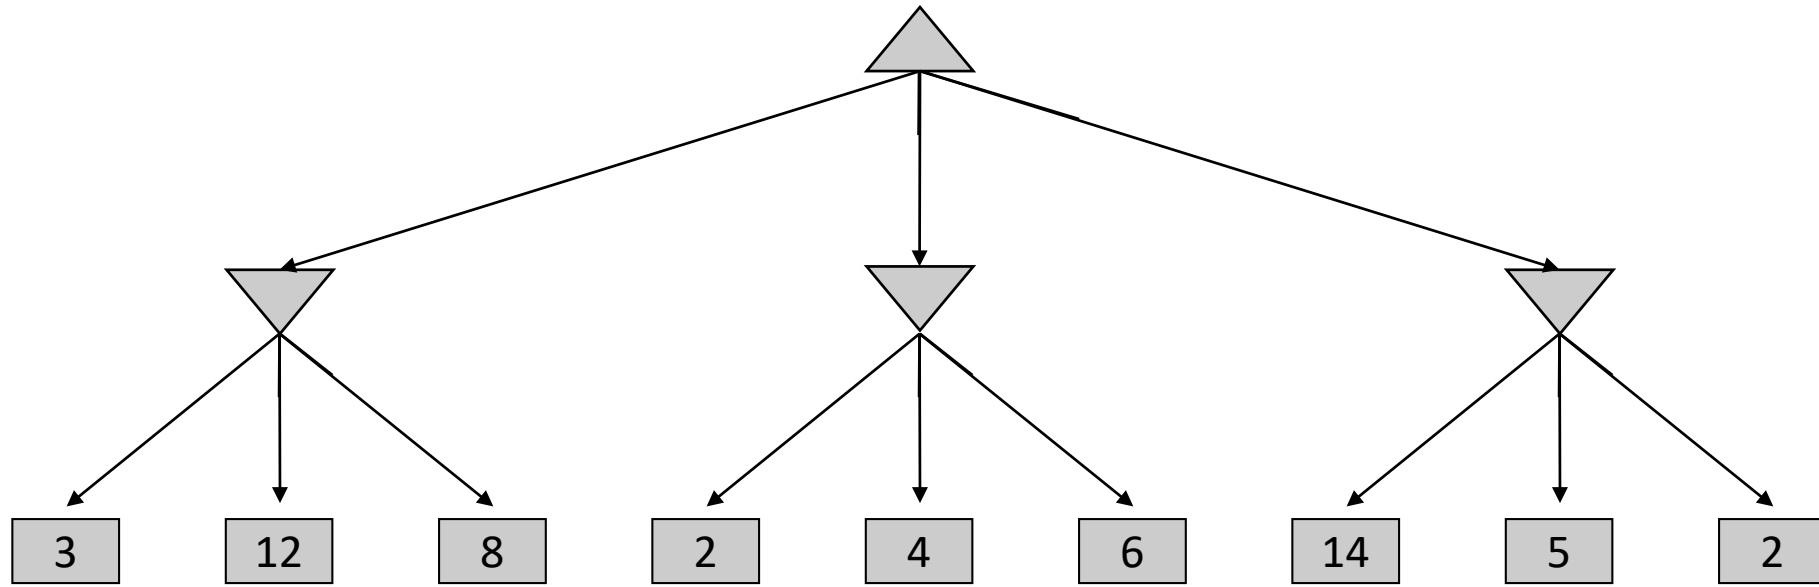


Minimax Pruning

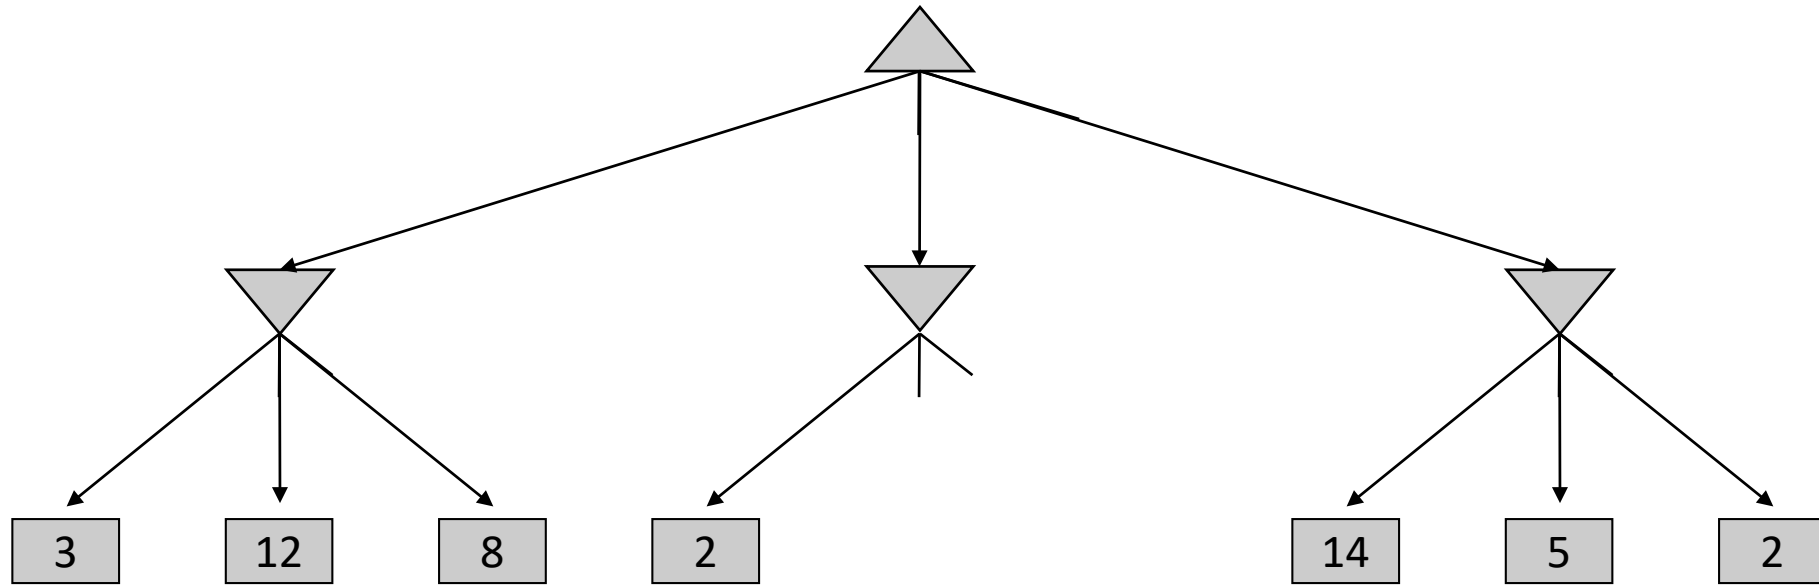

Alpha-Beta Pruning

- General configuration (MIN version)
 - We're computing the MIN-VALUE at some node n
 - We're looping over n 's children
 - n 's estimate of the childrens' min is dropping
 - Who cares about n 's value? MAX
 - Let a be the best value that MAX can get at any choice point along the current path from the root
 - If n becomes worse than a , MAX will avoid it, so we can stop considering n 's other children (it's already bad enough that it won't be played)
- MAX version is symmetric

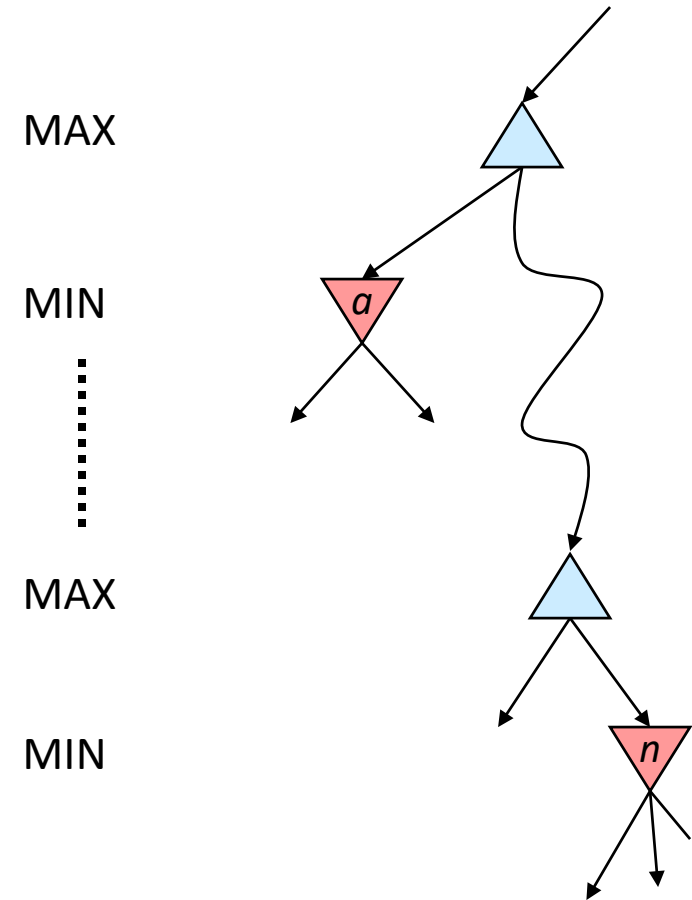

Alpha-Beta Implementation


α : MAX's best option on path to root
 β : MIN's best option on path to root

```
def max-value(state,  $\alpha$ ,  $\beta$ ):  
    initialize  $v = -\infty$   
    for each successor of state:  
         $v = \max(v, \text{value}(\text{successor}, \alpha, \beta))$   
        if  $v \geq \beta$  return  $v$   
         $\alpha = \max(\alpha, v)$   
    return  $v$ 
```


```
def min-value(state,  $\alpha$ ,  $\beta$ ):  
    initialize  $v = +\infty$   
    for each successor of state:  
         $v = \min(v, \text{value}(\text{successor}, \alpha, \beta))$   
        if  $v \leq \alpha$  return  $v$   
         $\beta = \min(\beta, v)$   
    return  $v$ 
```

Alpha-Beta Pruning Properties


- This pruning has **no effect** on minimax value computed for the root!
- Values of intermediate nodes might be wrong
 - Important: children of the root may have the wrong value
 - So the most naïve version won't let you do action selection
- Good child ordering improves effectiveness of pruning
- With “perfect ordering”:
 - Time complexity drops to $O(b^{m/2})$
 - Doubles solvable depth!
 - Full search of, e.g. chess, is still hopeless...
- This is a simple example of **metareasoning** (computing about what to compute)

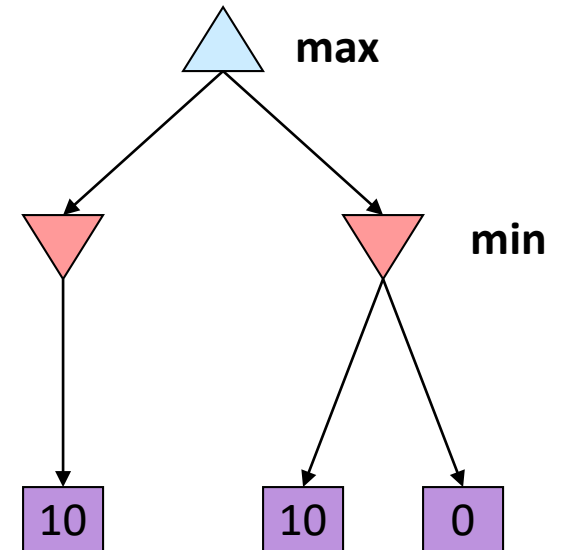

Alpha-Beta Quiz

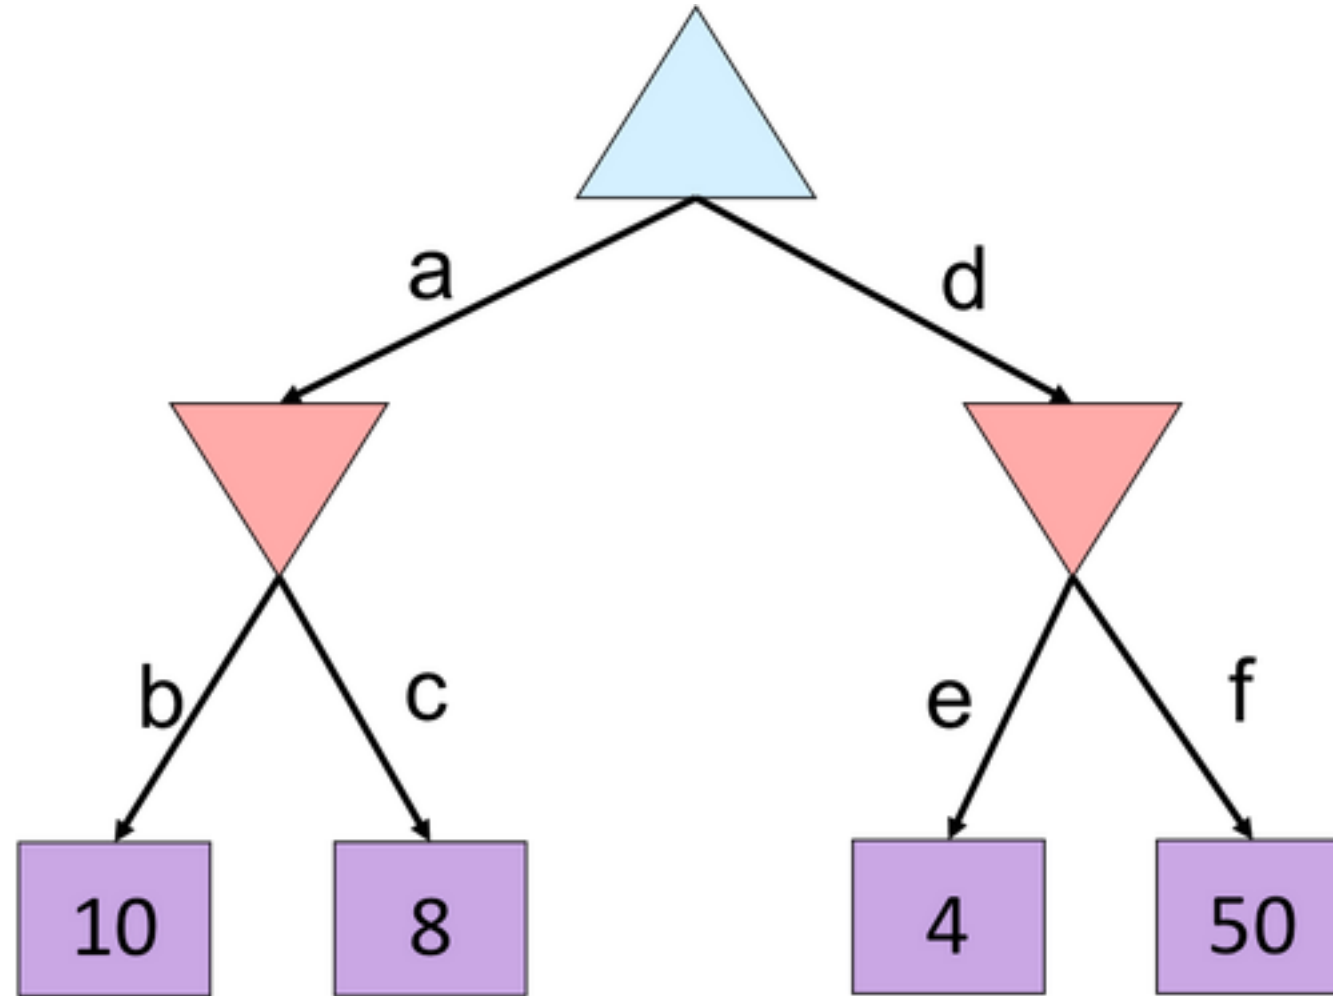


Alpha-Beta Quiz 2

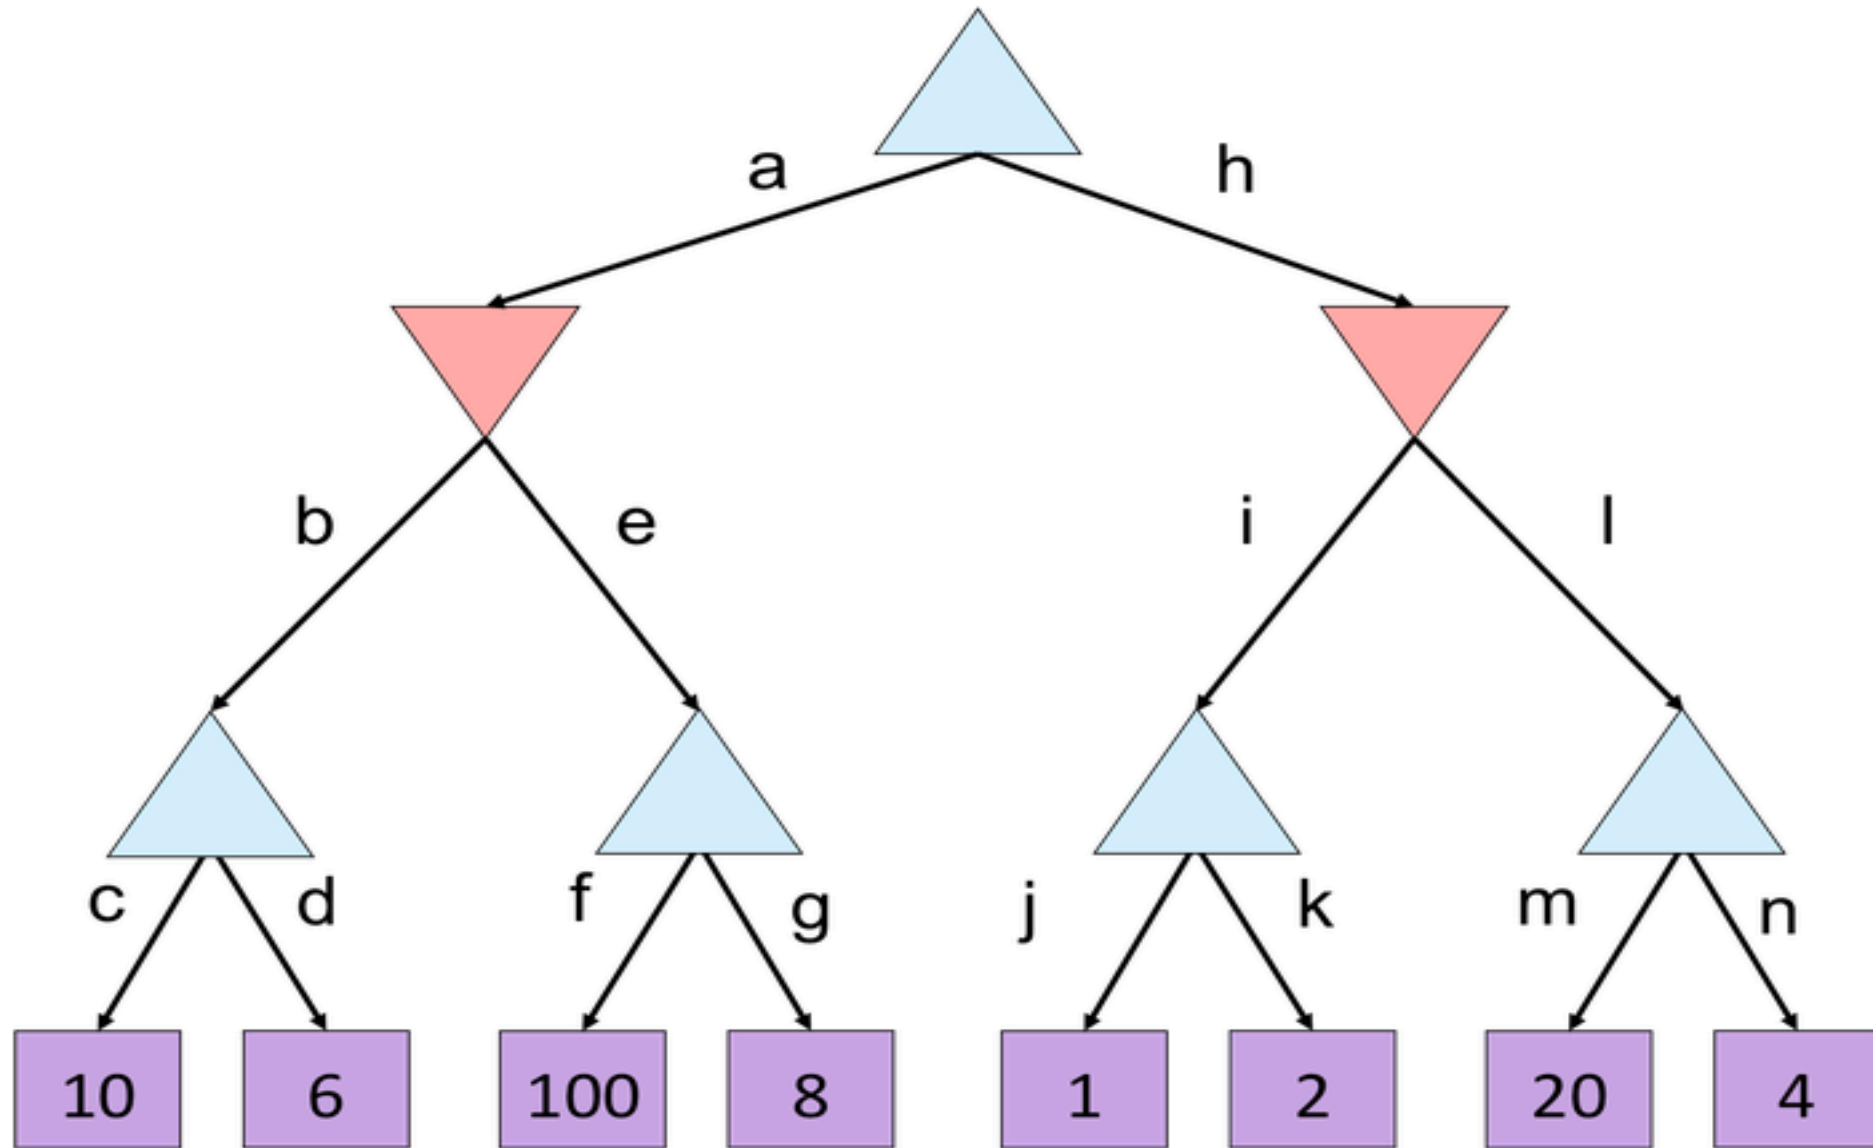


Resource Limits

- Problem: In realistic games, cannot search to leaves!
- Solution: Depth-limited search
 - Instead, search only to a limited depth in the tree
 - Replace terminal utilities with an evaluation function for non-terminal positions
- Example:
 - Suppose we have 100 seconds, can explore 10K nodes / sec
 - So can check 1M nodes per move
 - α - β reaches about depth 8 – decent chess program
- Guarantee of optimal play is gone
- More plies makes a BIG difference
- Use iterative deepening for an anytime algorithm

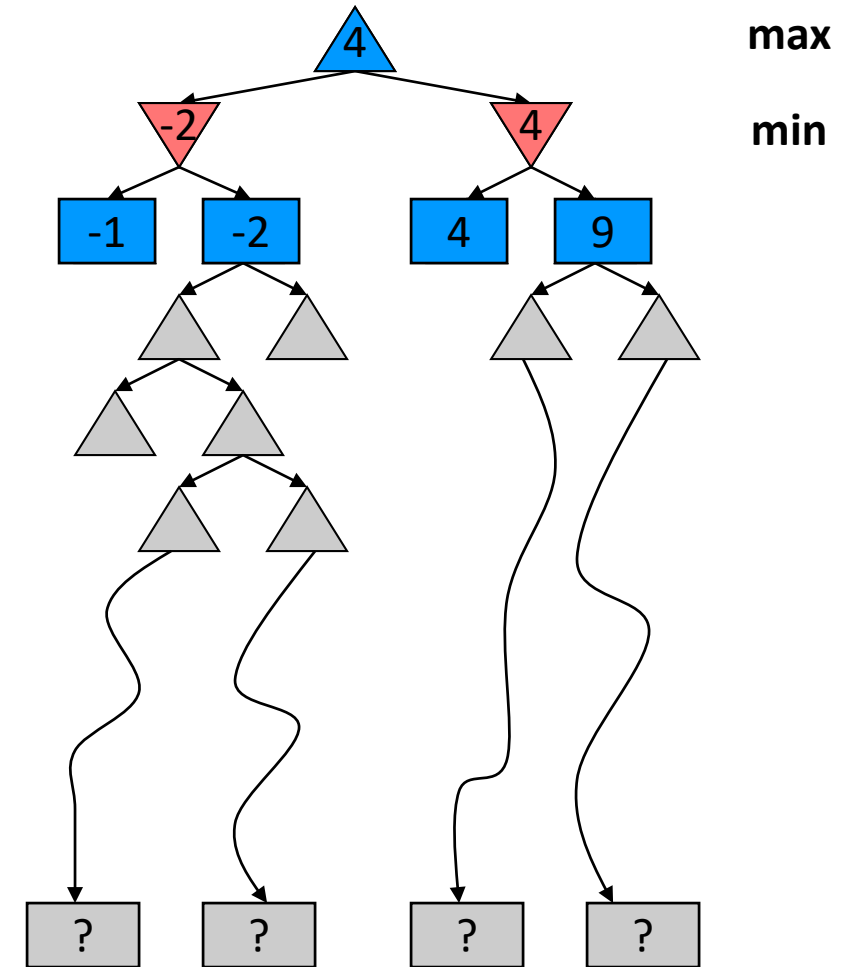

Evaluation Functions

- Evaluation functions score non-terminals in depth-limited search

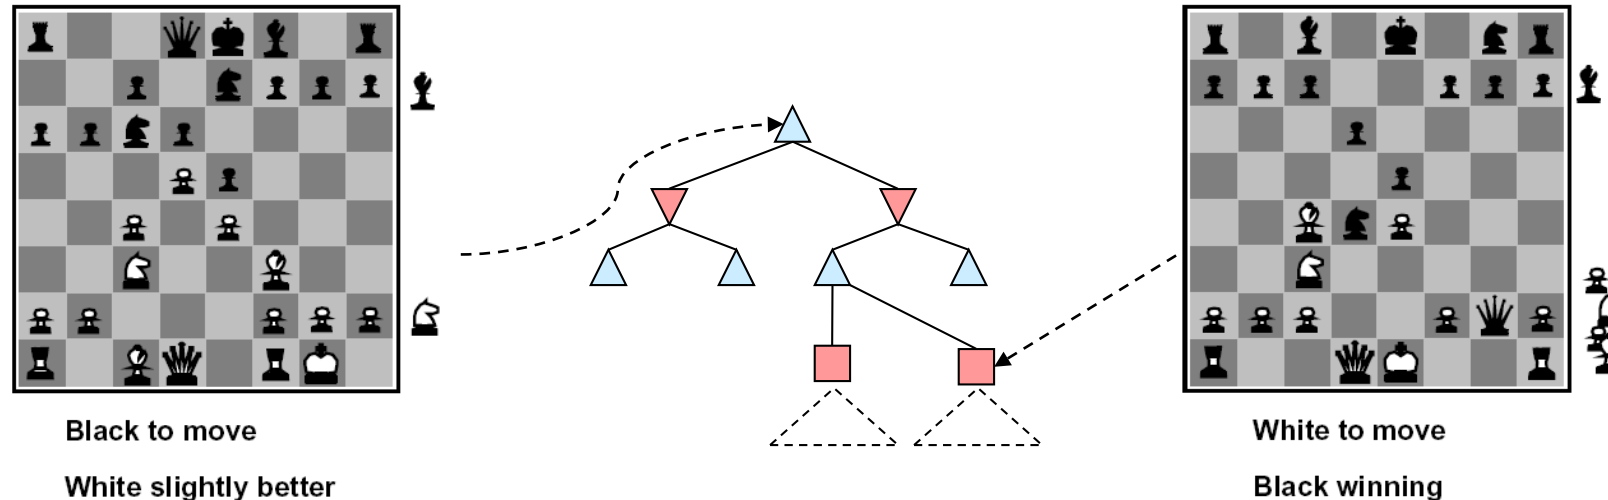

- Ideal function: returns the actual minimax value of the position
- In practice: typically weighted linear sum of features:

$$Eval(s) = w_1 f_1(s) + w_2 f_2(s) + \dots + w_n f_n(s)$$



- e.g. $f_1(s) = (\text{num white queens} - \text{num black queens})$, etc.

$c_1 * \text{material} + c_2 * \text{mobility} + c_3 * \text{king safety} + c_4 * \text{center control} + c_5 * \text{pawn structure} + c_6 * \text{king tropism} + \dots$

Queen=9, Rook=5; Knight or Bishop=3; Pawn=1

Depth Matters

- Evaluation functions are always imperfect
- The deeper in the tree the evaluation function is buried, the less the quality of the evaluation function matters
- An important example of the tradeoff between complexity of features and complexity of computation

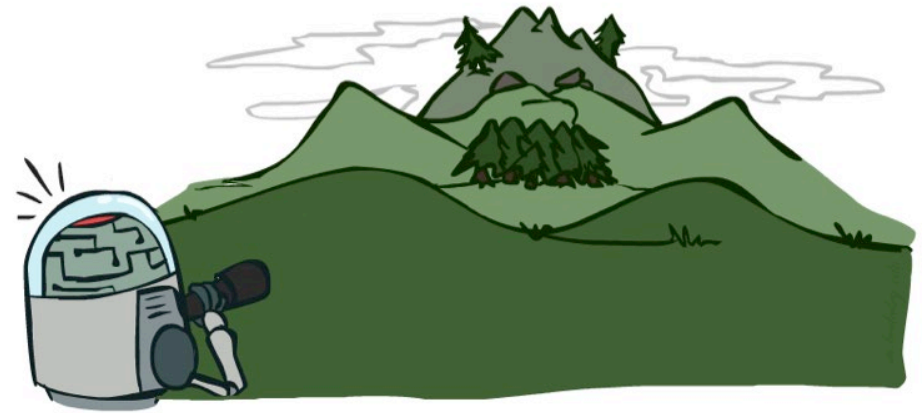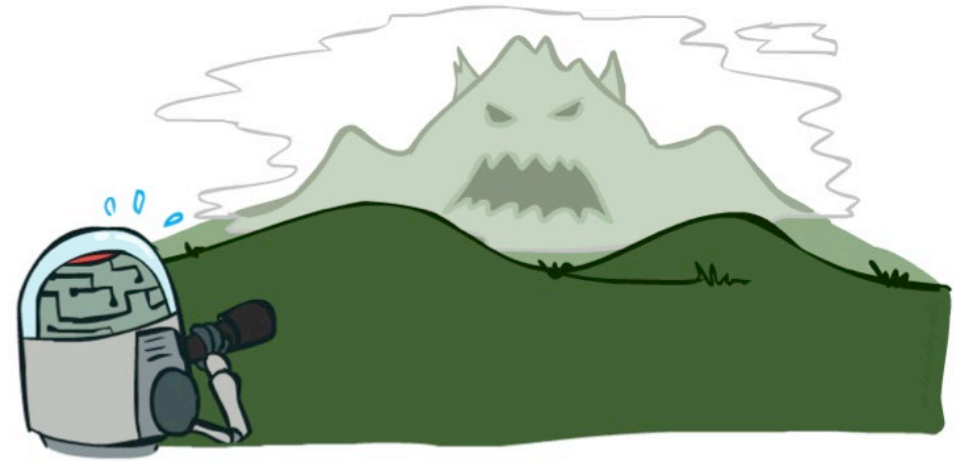

Synergies between Evaluation Function and Alpha-Beta?

- Alpha-Beta: amount of pruning depends on expansion ordering
 - Evaluation function can provide guidance to expand most promising nodes first (which later makes it more likely there is already a good alternative on the path to the root)
 - (somewhat similar to role of A* heuristic, CSPs filtering)
- Alpha-Beta: (similar for roles of min-max swapped)
 - Value at a min-node will only keep going down
 - Once value of min-node lower than better option for max along path to root, can prune
 - Hence: IF evaluation function provides upper-bound on value at min-node, and upper-bound already lower than better option for max along path to root THEN can prune