


Drop the two columns the corpus provides, and the signal falls in 5 of 6 cells

`reasoning\_difficulty` is the strongest single covariate in 5 of 6 of the 20-feature fits — it is an annotation shipped with the task config, not something a router could read at serving time. WebArena carries neither column at all (see F4), which is why the matched set exists.

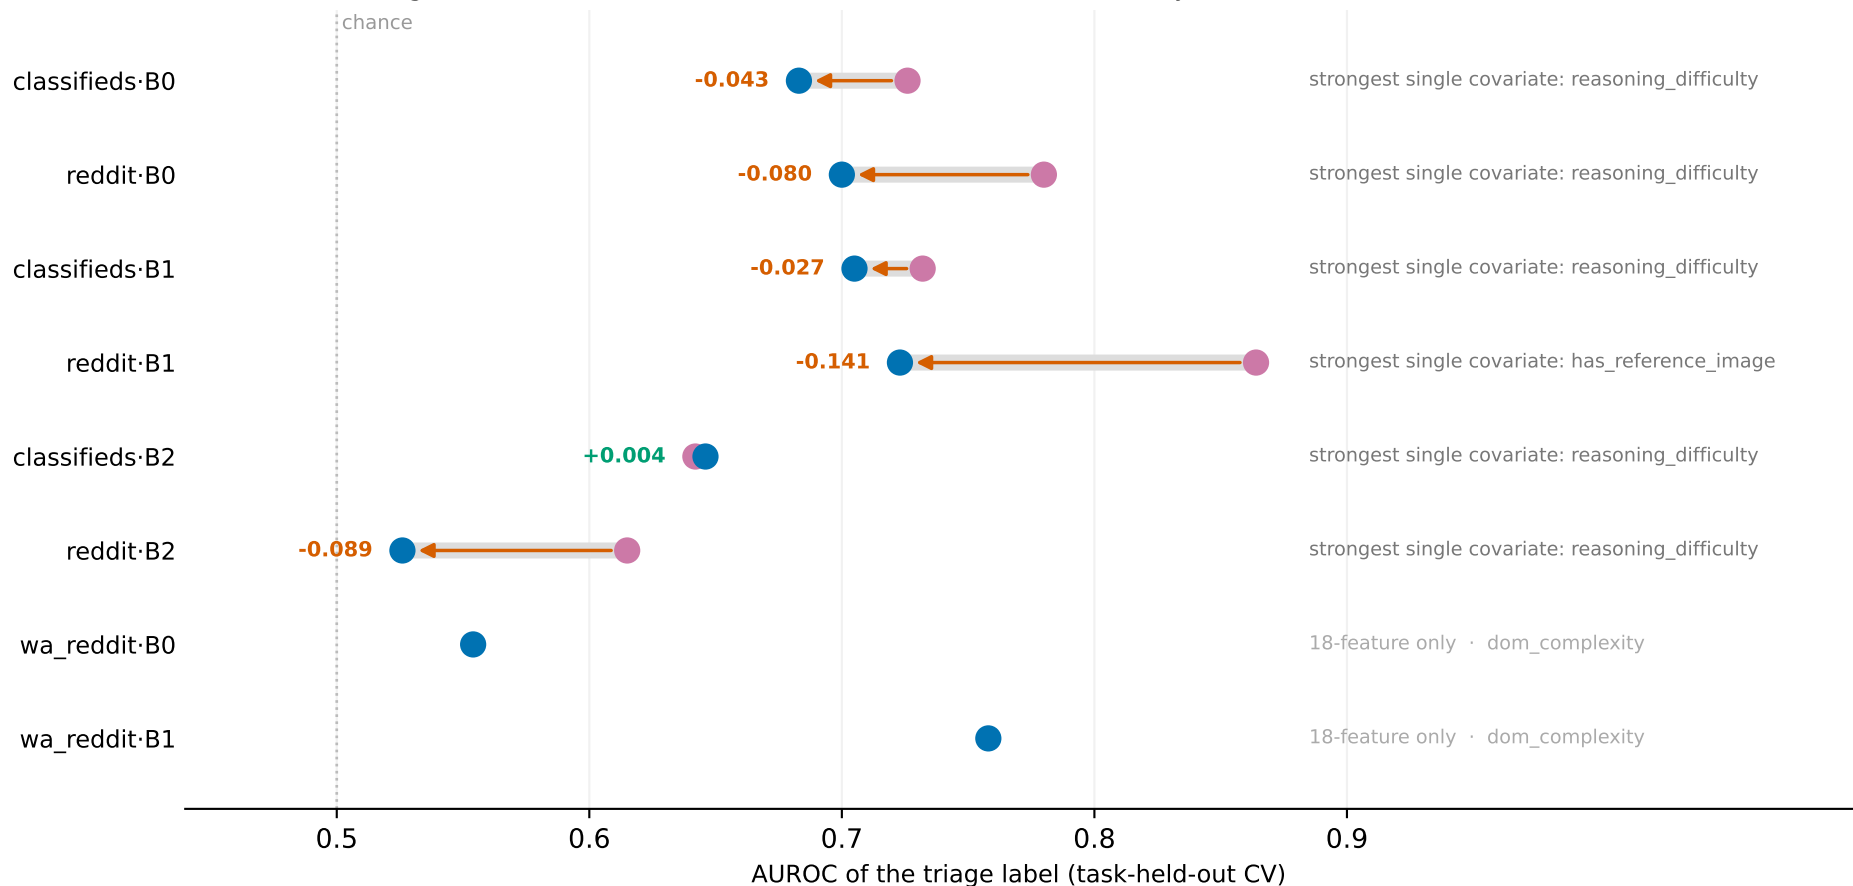

Sources: router_triage_learnability.md (20-feature, VWA) and router_triage_learnability_with_wa.md (18-feature, matched). The 18-feature fits are NOT a subset — every cell was refitted.

- 20 features — includes the corpus's own difficulty label and reference-image flag
- 18 features — those two dropped on every cell (what a deployment could actually use)