


Section V.A — Finite-shot tomography: F_{msg} and p_{succ}
(noiseless AerSimulator, 8 message states, $N_{\text{bootstrap}} = 2000$)

(a) Output fidelity per message state
(bars = finite-shot tomo $\pm$ 95% bootstrap CI;
diamonds = statevector ideal)



(b) Post-selection rate per message state
(95% Clopper-Pearson CI, 20,000 shots/basis)

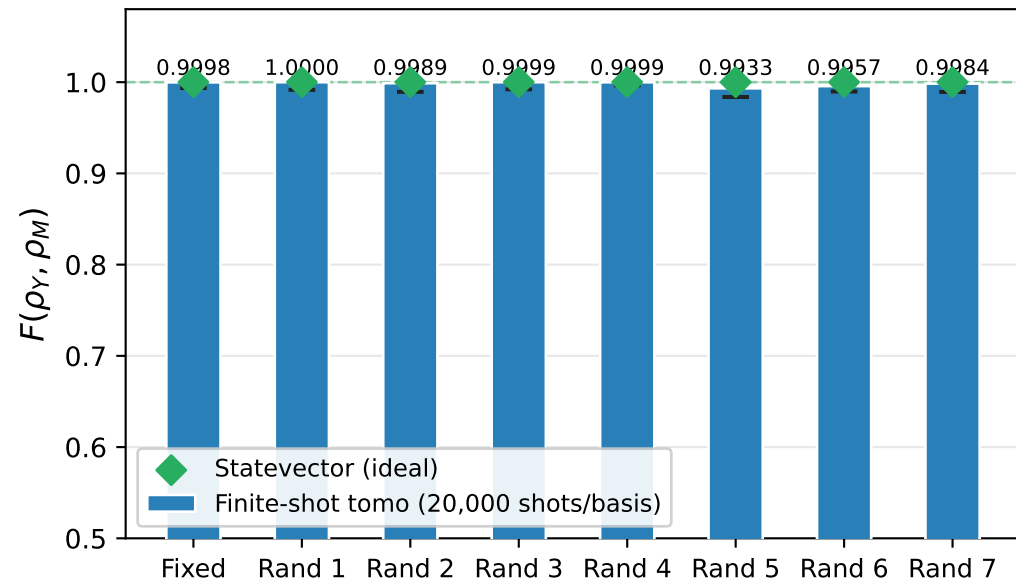