

HOW TO MEASURE AN ADBLOCKER PLUGIN

BY QUENTIN MONCHARMONT

DIGITAL ANALYTICS CONSULTANT

SUMMARY

SUMMARY		
1.	CONTEXT	3
2.	INTEGRATION	3
2.1.	CLICK METHOD	3
3.	ANALYSIS	3
3.1.	CLICK METHOD	3



1. CONTEXT

Over the last years, the number of visitors with an adblocker plugin has grown exponentially. If the business model for a website is based on advertisement, it's important to know how many visitors block this source of income and if they have a specific behaviour.

2. INTEGRATION

The detection will be always based on the same "fuckadblock.js" methods. The following points present different functionalities to get this information in your AT Internet Analytics Solution.

2.1. CLICK METHOD

This method is based on the Click event. If a visitor is browsing on your website with an adblocker plugin, we will send a click event hit with some information:

- The click name
- The click type

What are the benefits?

- Click event (no settings required).
- The click hit sent is **independently from the page hit** (no risk of losing some page data)
- Possibility to apply a **specific segment** based on this click (to understand the different behaviours of these visitors).



3. ANALYSIS

3.1. CLICK METHOD


In our example, we would like to know the behaviours of some of the visitors who used an adblocker plugin:

- How many visits on your website are done with an adblocker plugin?
- The visitors **deactivate** the adblocker plugin during the visit?

With the Data Query tool, build a template based on your click (filter on the name – example: "adblock") and select the different metrics that you need (visits, clicks, etc.)



1st question: Results extraction of clicks

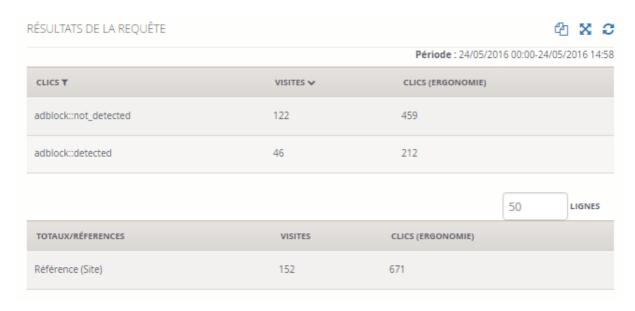

In your example we can conclude upon the following results:

.1

30% of visits had an adblocker plugin activated at least once during the visit.

2nd question: Results extraction

RÉSULTATS DE LA REQUÊTE				എ ∺ ≎
			Période: 24/05	5/2016 00:00-24/05/2016 15:42
VISITEURS UNIQUES ID	VISITES ID	CLICS ▼	VISITES 🗸	CLICS (ERGONOMIE)
-8954354730992410980	4	adblock::not_detected	1	2
-7714606814740455829	3	adblock::detected	1	2
-6592766843230979406	2	adblock::not_detected	1	6
-4915673792651514328	1	adblock::detected	1	1
-4915673792651514328	1	adblock::not_detected	1	6
				50 LIGNES
TOTAUX/RÉFERENCES		VISITES	CLICS (ERGONOMIE)	
Référence (Site)		4	18	

In this example, we use the dimensions:

- **Unique visitor ID**: Unique numeric ID from AT Internet enabling the recognition of unique visitors
- Visit ID: Visit ID. These IDs are reset to zero each day

With this template we can identify if a visitor has turn off / on his plugin during his visit on the website. In red, we can find this behavior:

- Unique visitor ID (-4915673792651514328) is the same, so we know that it is the same visitor.
- Visit ID (1) indicates the visit number. In this case we can deduce that visitors have turned on or off their plugin during their navigation.

It is possible to get this result directly in your template if you create a **segment** based on:

- Visits that have seen both clicks (detected and not detected)



In your example we can conclude upon the following results:

Concerning visits from browsers with ad blockers, it occurs for **47%** of visits that the user changes the state of their adblock plugin.



If you want apply another segment (based on a source for example), you can create a "Custom Metric" based on the visits metric segmented with your segment.





API rest call:

https://apirest.atinternet-

solutions.com/data/v2/html/getData?&columns={d_click,m_visits,m_clicks}&sort={-m_visits}&filter={\$OR:{d_click:{\$eq:'[your detected click name]'},d_click:{\$eq:'[your not detected click name]'}}}&space={s:[Id_site]}&period={D:{start:'[AAAA-MM-DD]',end:'[AAAA-MM-DD]'}}&max-results=10000&page-num=1&include={reference:space}

https://apirest.atinternet-

solutions.com/data/v2/html/getData?&columns={d_uv_id,d_visit_id,d_click,m_visits,m_clicks}&sort={-m_visits}&filter={\$OR:{d_click:{\$eq:'adblock%3A%3Adetected'},d_click:{\$eq:'adblock%3A%3Anot_detected'}}}}}}&space={s:[Id_site]}&period={D:{start:'[AAAA-MM-DD]',end:'[AAAA-MM-DD]'}}&max-results=10000&page-num=1&include={reference:space}

With the segment:

https://apirest.atinternet-

solutions.com/data/v2/html/getData?&columns={d_site,m_visits,m_clicks}&sort={-m_visits}&segment=[Id_segment]&space={s:[Id_site]}&period={D:{start:'[AAAA-MM-DD]',end:'[AAAA-MM-DD]'}}&max-results=50&page-num=1





Quentin Moncharmont

Digital Analytics Consultant

Applied Technologies Internet SAS (France) Siège social : 8, impasse Rudolf Diesel, 33700 Mérignac France - Montant du capital social : 619 200 € - RCS Bordeaux B 403 261 258 ; Siret : 403 261 258 000 38 – AT Internet LTD (United Kingdom) c/o Natixis Pramex International Ltd, 11 Old Jewry , 8th Floor South - London EC2R 8DU − UK - Registered in England and Wales N° 6740401 − Applied Technologies Internet Spain SL (España) c/o Sire Mexia, Calle Ponzano 39 (4i), 28003 Madrid - España - Registro Mercantil de Madrid. N.I.F. Y11865606 − Applied Technologies Internet GmbH (Deutschland) Schleißheimer Str. 4, 80333 München, Deutschland - HRB 194384 Amtsgericht München Geschäftsführer: Mathieu Llorens − Applied Technologies Internet Brasil Consultoria em Tecnologia Digital Ltda (Brasil) c/o Pramex International do Brasil Consultoria Ltda, Avenida Paulista, n°283, 12°andar, Bela Vista, 01311-000 São Paulo, SP −Brazil, CNPJ: 18.578.870/0001-08, NIRE 3522776255-9 São Paulo − Applied Technologies Internet Singapore Pte. Ltd (Singapore) c\old Altios Singapore, 51 Goldhill Plaza #22-06/07, Singapore 308900, Singapore, Reg. No 201332366G − AT Internet LLC (Russia) Registered address: Gruzinskiy val Street, 11, bld 8 - 123056 Moscow, Office: 1 Letnikovskaya Street, 11/10, bld. 12 - 15114 Moscow, State registration number (ОГРН): 5147746461869 - Individual taxpayer number (ИНН): 7703823554, Tax registration reason code (КПП): 770301001

