

1.1. docker build

```
C:\Users\user\Desktop\current_projects\ci-cd-lab>docker build -t quilartt-ci-cd-lab:latest .
[+] Building 29.9s (8/8) FINISHED                                                                docker:desktop-linux
 => [internal] load build definition from Dockerfile                                                              0.1s
 => => transferring dockerfile: 104B                                                                              0.0s
 => [internal] load metadata for docker.io/library/nginx:alpine                                                  12.9s
 => [auth] library/nginx:pull token for registry-1.docker.io                                                      0.0s
 => [internal] load .dockerignore                                                                                 0.0s
 => => transferring context: 2B                                                                                   0.0s
 => [internal] load build context                                                                                 0.0s
 => => transferring context: 376B                                                                                 0.0s
 => [1/2] FROM docker.io/library/nginx:alpine@sha256:785835ea65db4bba6f021acc0f3be91b0fef76a53fe41f8588c6698d2ae  16.4s
 => => resolve docker.io/library/nginx:alpine@sha256:785835ea65db4bba6f021acc0f3be91b0fef76a53fe41f8588c6698d2aed  0.0s
 => => sha256:b9b388a21ecfde6ac80505f23f527146a2129dfb104e79b029bbd00d4cc1a919 20.53MB / 20.53MB                   6.5s
 => => sha256:9b0f7dfe35b2711a17f60dadd6d4035dc0cdee152538cc5c0987029e94679548 1.40kB / 1.40kB                    1.8s
 => => sha256:2ec5fb117ffa9a78b15fb6a78745ffc569c8da0aee9f36ace4cd67a44b1fef79 1.21kB / 1.21kB                    2.2s
 => => sha256:26185d08a3ec318dd85a6c9f2172e714ec13cececd7f33c533b40b1689f9fedb 404B / 404B                        2.8s
 => => sha256:7cc330898115ce55acccb0cc1e7dd091df4410c8c5f3c540710ee0ac689f5fcb 964B / 964B                        1.0s
 => => sha256:657023555a2a19dc6036468198bb350d2c7feaac7f2d0a3901b4dd3cb25e40c5 629B / 629B                        2.4s
 => => sha256:12b85cff06fd7d383d36a9c96503fe049c9d4bf3dfda5cbb9ffa6ae99b9c07a6 1.94MB / 1.94MB                    3.6s
 => => sha256:7b229517ed222597277036d94892173207d01a731ab3a88eeb1de2e963a2c788 3.85MB / 3.85MB                   12.4s
 => => extracting sha256:7b229517ed222597277036d94892173207d01a731ab3a88eeb1de2e963a2c788                         0.2s
 => => extracting sha256:12b85cff06fd7d383d36a9c96503fe049c9d4bf3dfda5cbb9ffa6ae99b9c07a6                         0.1s
 => => extracting sha256:657023555a2a19dc6036468198bb350d2c7feaac7f2d0a3901b4dd3cb25e40c5                         0.0s
 => => extracting sha256:7cc330898115ce55acccb0cc1e7dd091df4410c8c5f3c540710ee0ac689f5fcb                         0.0s
 => => extracting sha256:26185d08a3ec318dd85a6c9f2172e714ec13cececd7f33c533b40b1689f9fedb                         0.0s
 => => extracting sha256:2ec5fb117ffa9a78b15fb6a78745ffc569c8da0aee9f36ace4cd67a44b1fef79                         0.0s
 => => extracting sha256:9b0f7dfe35b2711a17f60dadd6d4035dc0cdee152538cc5c0987029e94679548                         0.0s
 => => extracting sha256:b9b388a21ecfde6ac80505f23f527146a2129dfb104e79b029bbd00d4cc1a919                         0.5s
 => [2/2] COPY index.html /usr/share/nginx/html/index.html                                                        0.1s
 => exporting to image                                                                                            0.3s
 => => exporting layers                                                                                           0.1s
 => => exporting manifest sha256:4ad339b980cb451cb17971ff58489281738284914ca8def44f3dfe1f2c71619d                 0.0s
 => => exporting config sha256:7e8c4714bc3a58cdcbd4079036f6b41403af1770c506533d39f951c408425069                   0.0s
 => => exporting attestation manifest sha256:d133162ab16282601886f955ee095d419889e545d8d859123114b398a74f8d33     0.0s
 => => exporting manifest list sha256:567be929b1e391eb26ecab38b22600aedce42ed35073ce8bcec0f75b215e8536            0.0s
 => => naming to docker.io/library/quilartt-ci-cd-lab:latest                                                      0.0s
 => => unpacking to docker.io/library/quilartt-ci-cd-lab:latest                                                   0.0s
```


1.2. docker run + http://localhost:8080

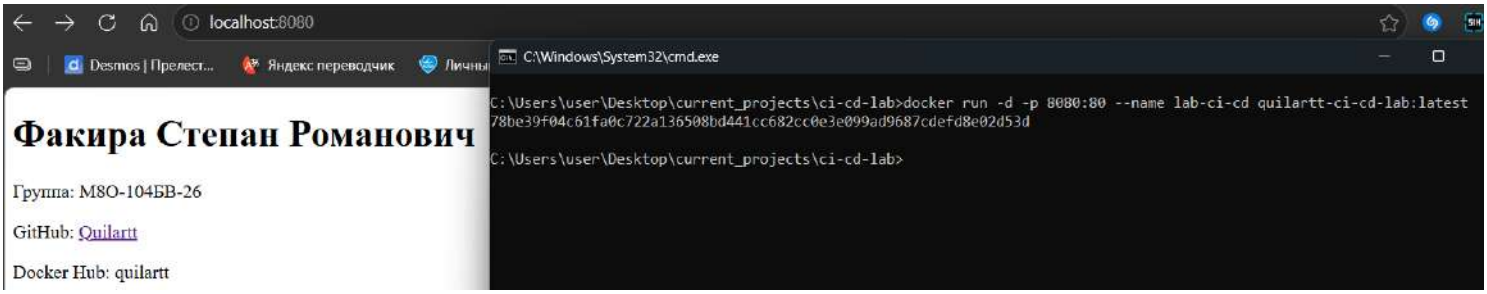


1.3. Workflow Pipeline: job ci, Smoke test container

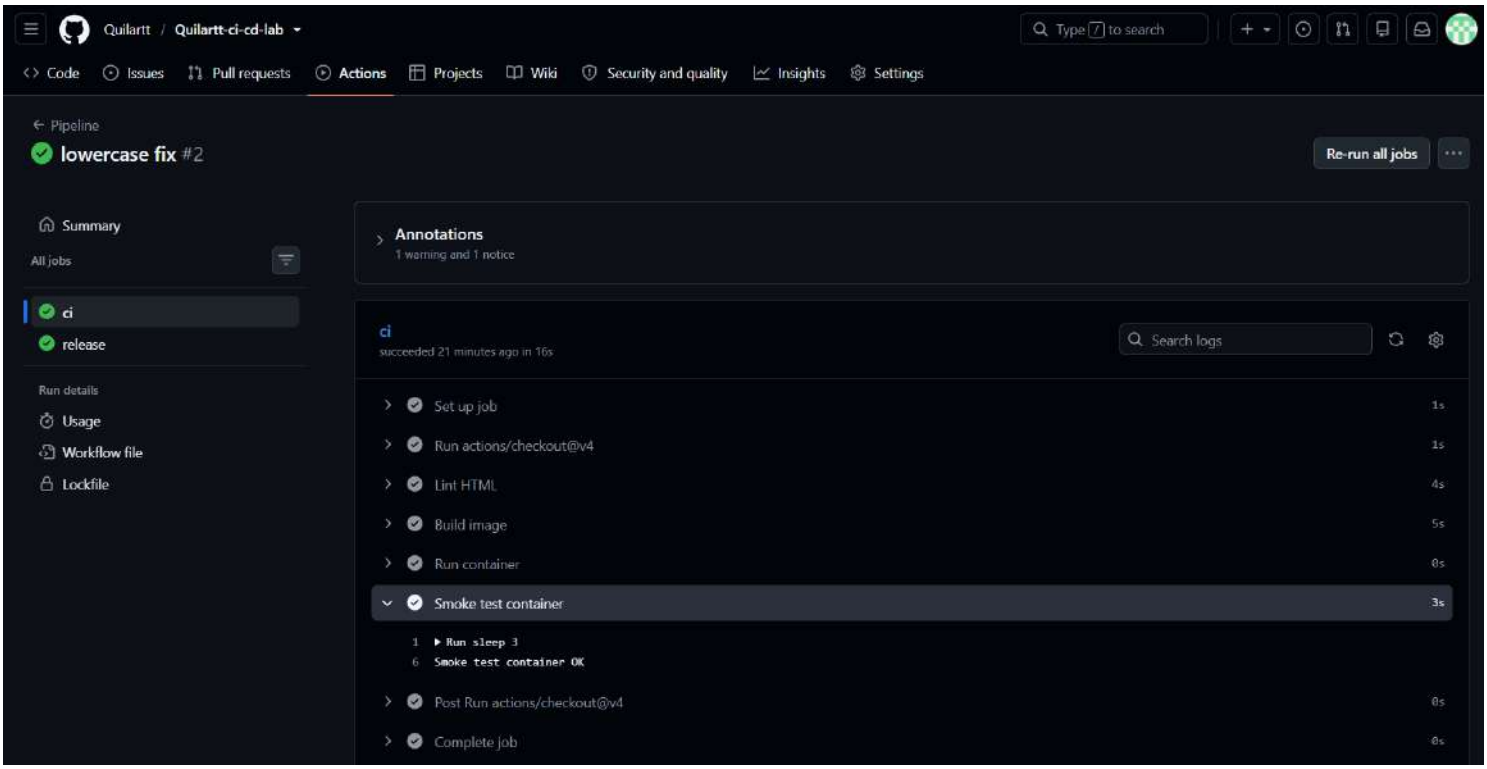


1.4. Job release: Build and push

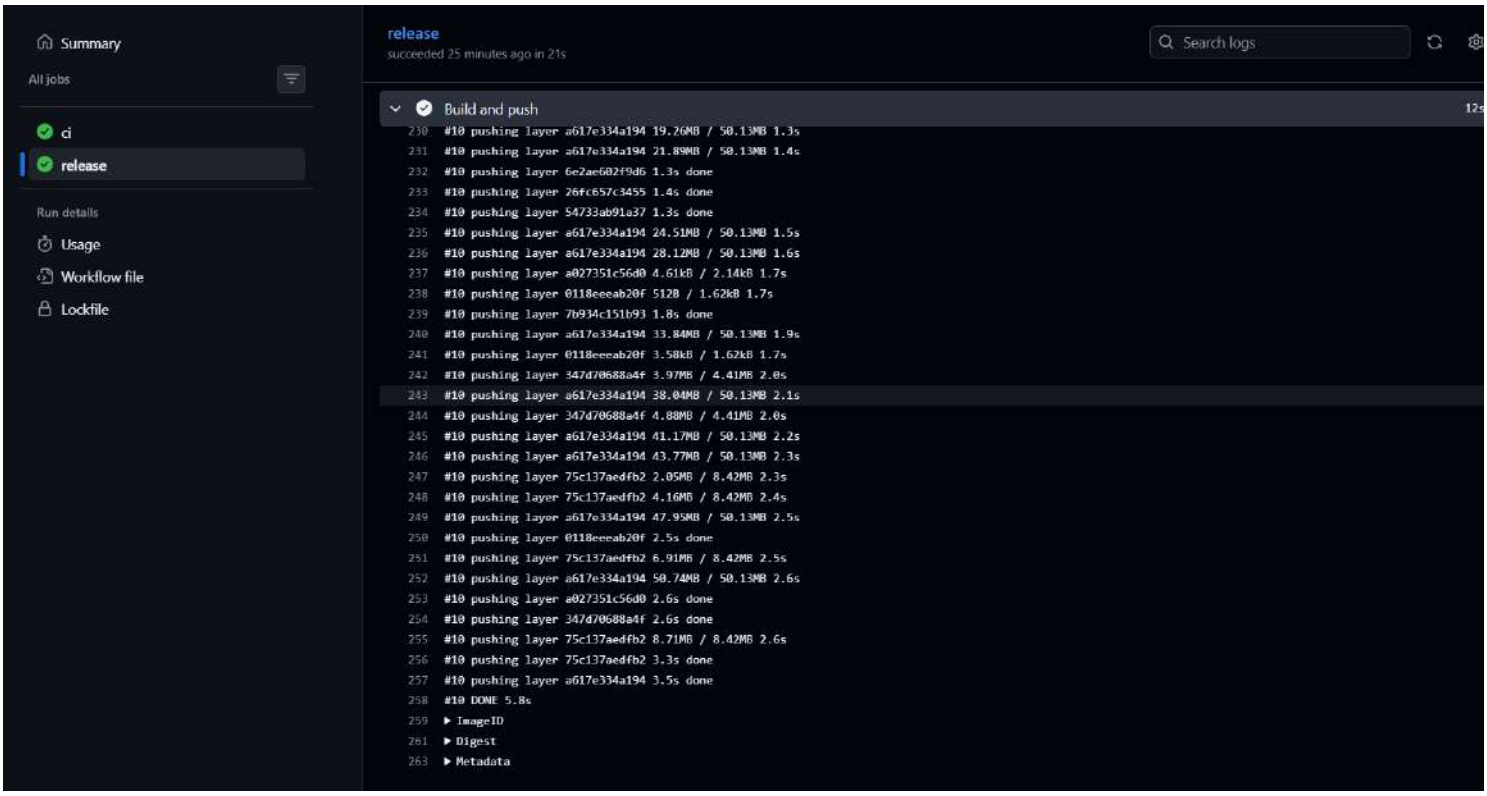


1.5. Страница пакета в GitHub Packages

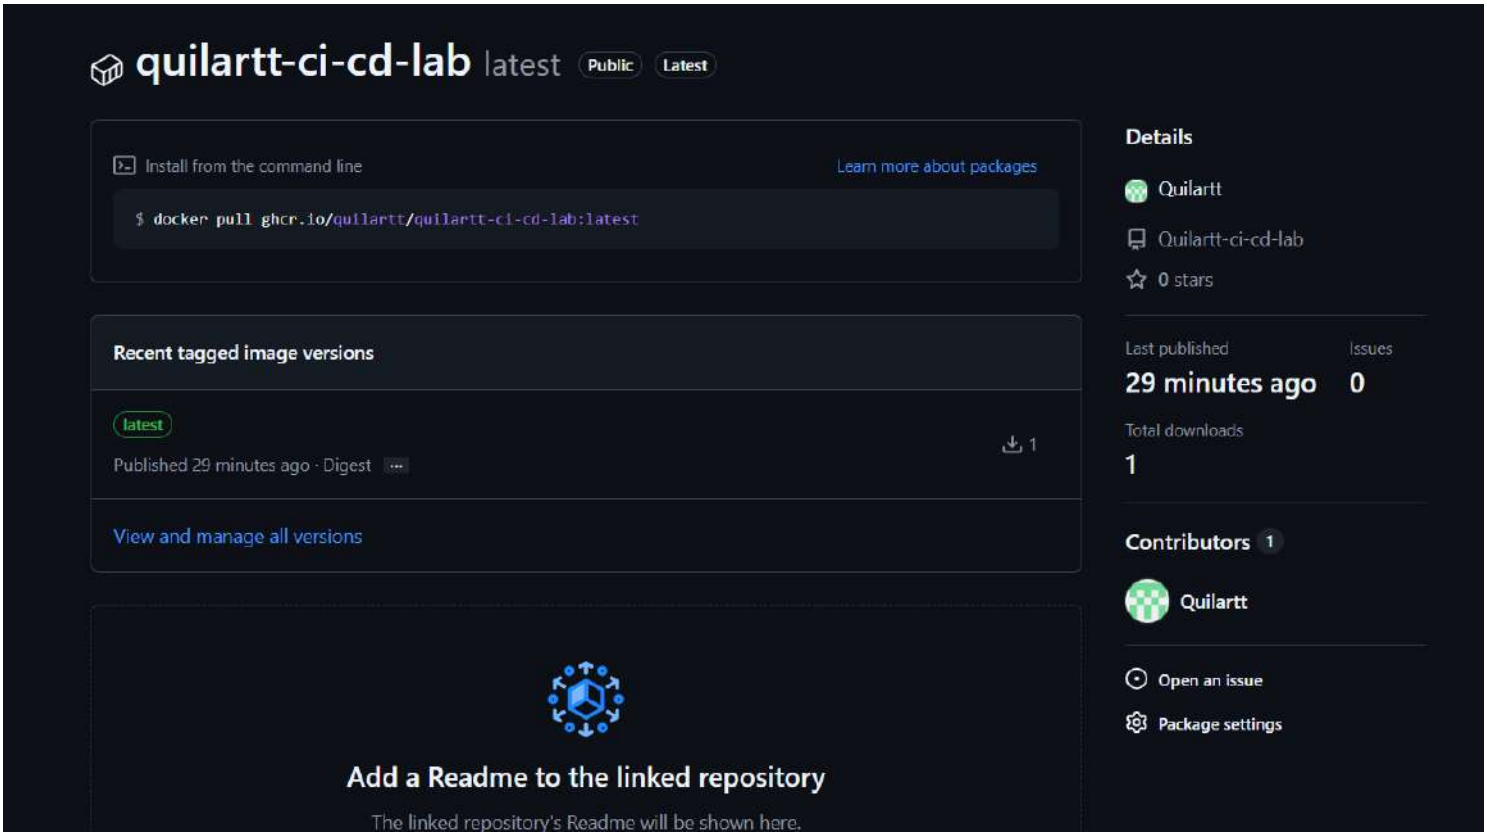

1.6. docker pull + запуск + http://localhost:8081

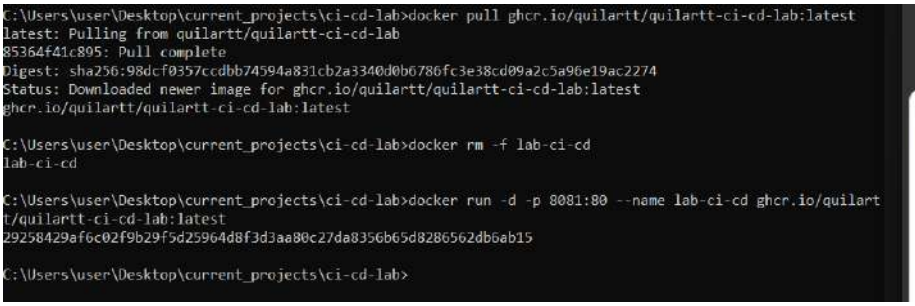

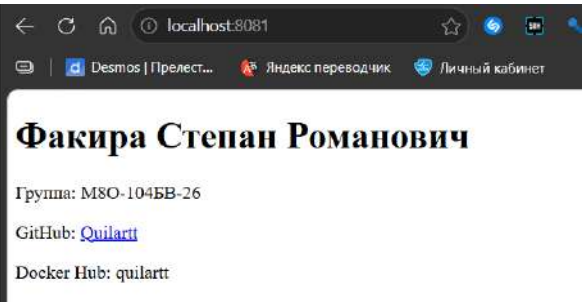

2.1. Содержимое pipeline.yml

Quilartt lowercase fix

Code Blame 50 lines (44 loc) · 1.22 KB

```yaml
name: Pipeline

on:
  push:
    branches: [main]
  pull_request:
    branches: [main]

jobs:
  ci:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - name: Lint HTML
        run: npx --yes htmlhint index.html
      - name: Build image
        run: docker build -t my-app:ci .
      - name: Run container
        run: docker run -d -p 8080:80 --name test-app my-app:ci
      - name: Smoke test container
        run: |
          sleep 3
          curl -s http://localhost:8080 | grep -q "Факира" || (echo "Smoke test failed" && exit 1)
          echo "Smoke test container OK"

  release:
    runs-on: ubuntu-latest
    needs: ci
    permissions:
      contents: read
      packages: write
    steps:
      - uses: actions/checkout@v4

      - name: Lowercase repository name
        run: echo "REPO_LC=${GITHUB_REPOSITORY,,}" >> $GITHUB_ENV

      - name: Login to GHCR
        uses: docker/login-action@v3
        with:
          registry: ghcr.io
          username: ${{ github.actor }}
          password: ${{ secrets.GITHUB_TOKEN }}

      - name: Build and push
        uses: docker/build-push-action@v5
        with:
          context: .
          push: true
          tags: ghcr.io/${{ env.REPO_LC }}:latest
```

2.2. Ветка break-html и коммит со сломанным HTML

index.html > html

```
2   <html lang="ru">
7   <body>
8     <h1>Факира Степан Романович</h1>
9     <p>Группа: М8О-104БВ-26</p>
10    <p>GitHub: <a href="https://github.com/Quilartt">Quilartt</a></p>
11    <p>Docker Hub: quilartt</p>
12  </body>
13
```

Проблемы | Выходные данные | Консоль отладки | Терминал | Порты


```
PS C:\Users\user\Desktop\current_projects\ci-cd-lab> git checkout -b break-html
Switched to a new branch 'break-html'
PS C:\Users\user\Desktop\current_projects\ci-cd-lab> git add index.html
PS C:\Users\user\Desktop\current_projects\ci-cd-lab> git commit -m  "break html"
[break-html af98ce0] break html
 1 file changed, 1 deletion(-)
PS C:\Users\user\Desktop\current_projects\ci-cd-lab> git push
fatal: The current branch break-html has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin break-html


To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

PS C:\Users\user\Desktop\current_projects\ci-cd-lab> git push --set-upstream origin break-html
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 282 bytes | 282.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'break-html' on GitHub by visiting:
remote:      https://github.com/Quilartt/Quilartt-ci-cd-lab/pull/new/break-html
remote:
To https://github.com/Quilartt/Quilartt-ci-cd-lab
 * [new branch]      break-html -> break-html
branch 'break-html' set up to track 'origin/break-html'.
PS C:\Users\user\Desktop\current_projects\ci-cd-lab>
```


2.3. PR break-html → main, CI красный

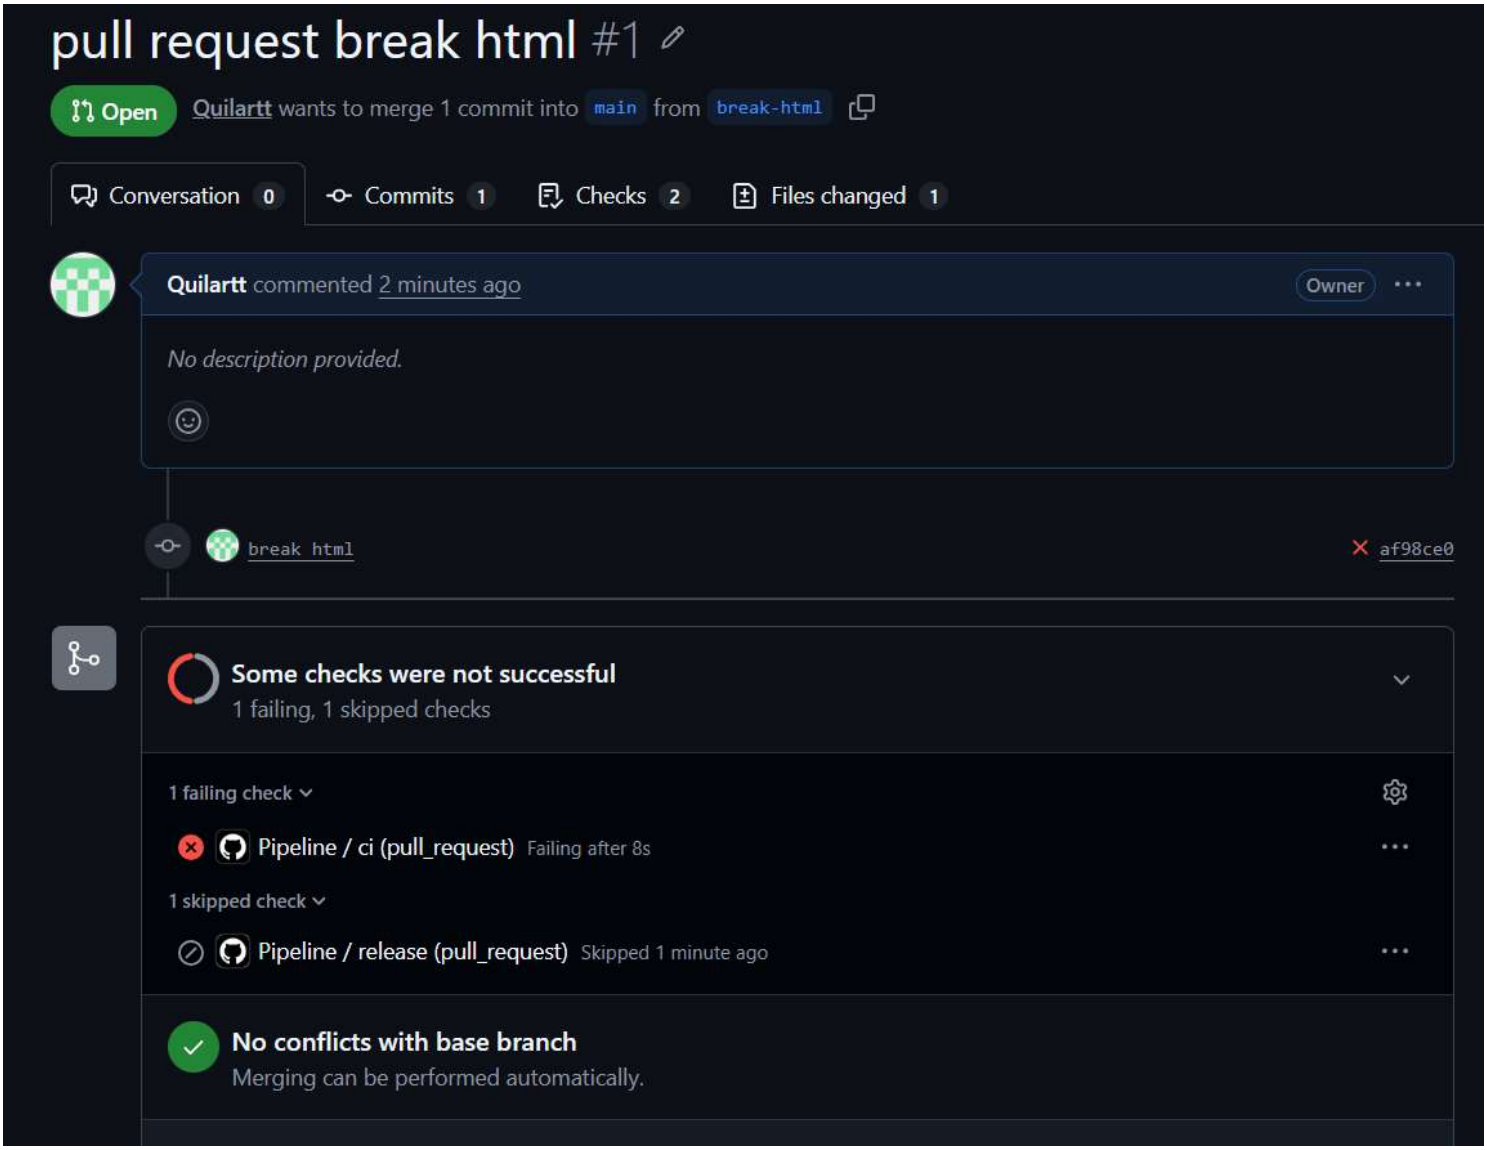


2.4. Job release не запустился (Skipped)

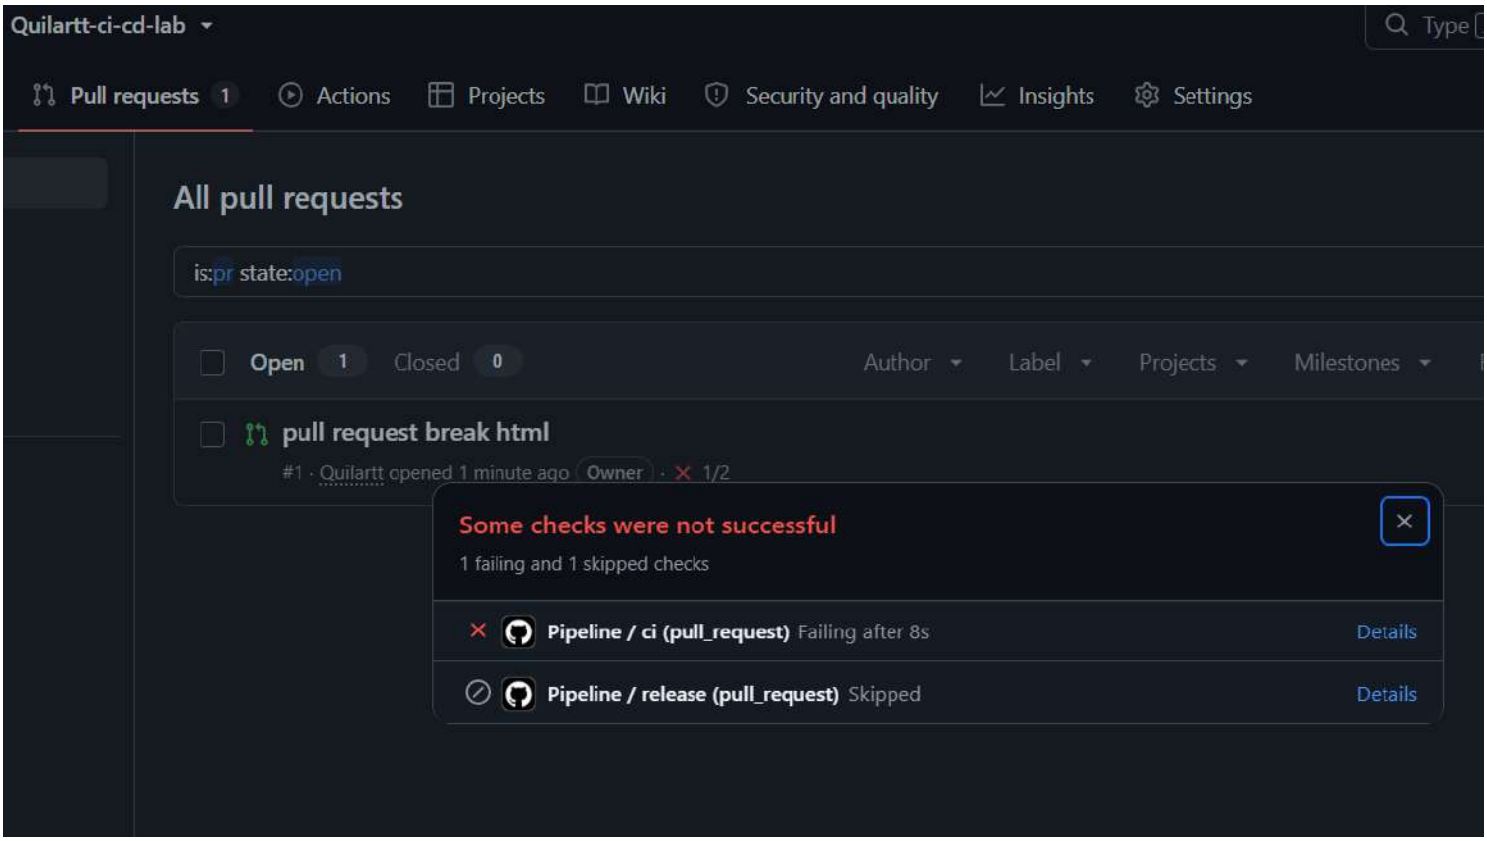


2.5. Лог упавшего CI: линтер и Smoke test container

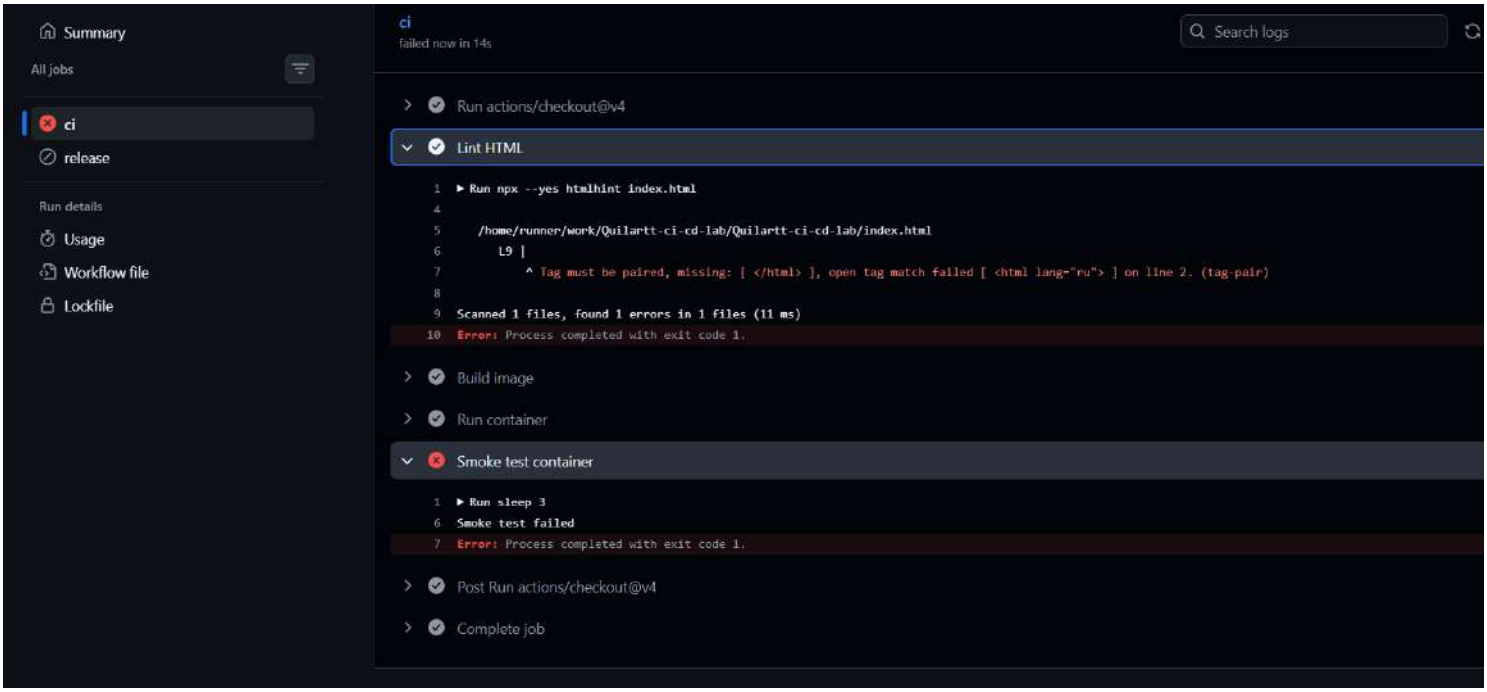


2.6. Исправление: CI в PR зелёный

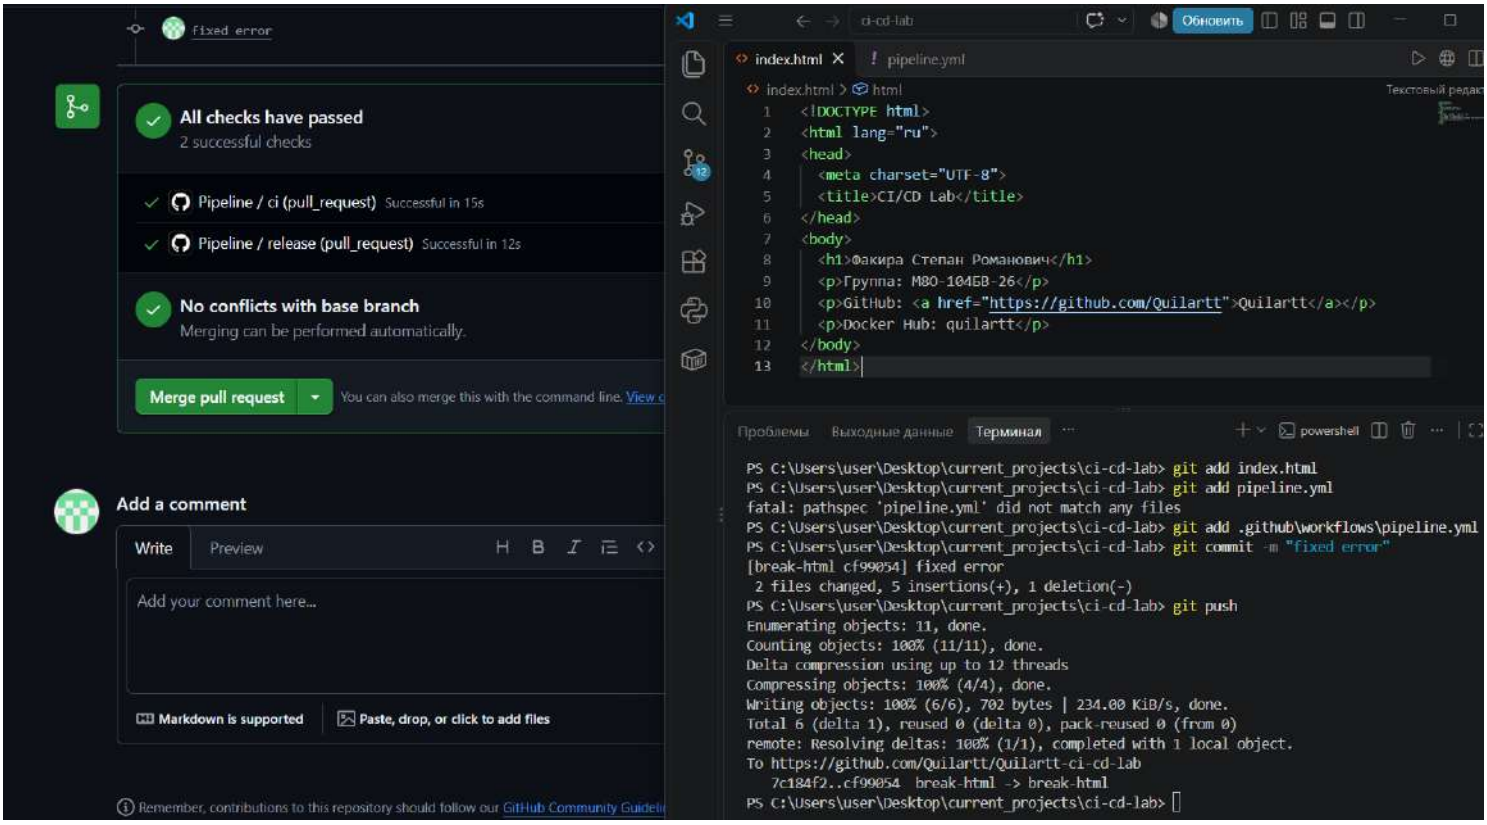

2.7. Merge pull request в main

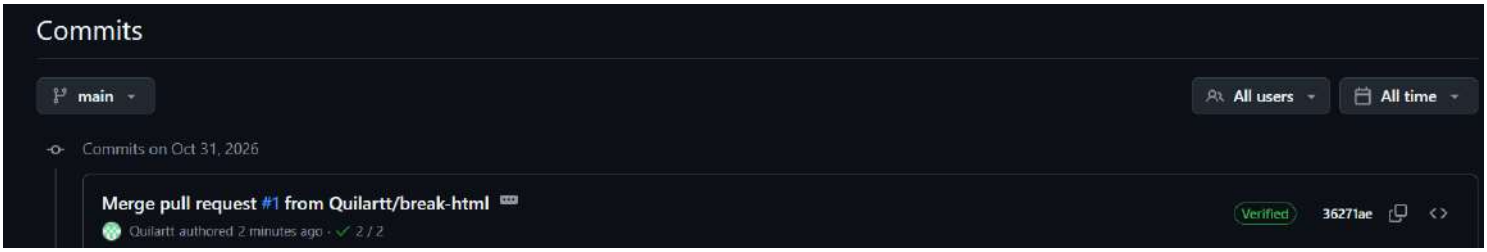

3.1. Settings → Pages (Source = GitHub Actions)

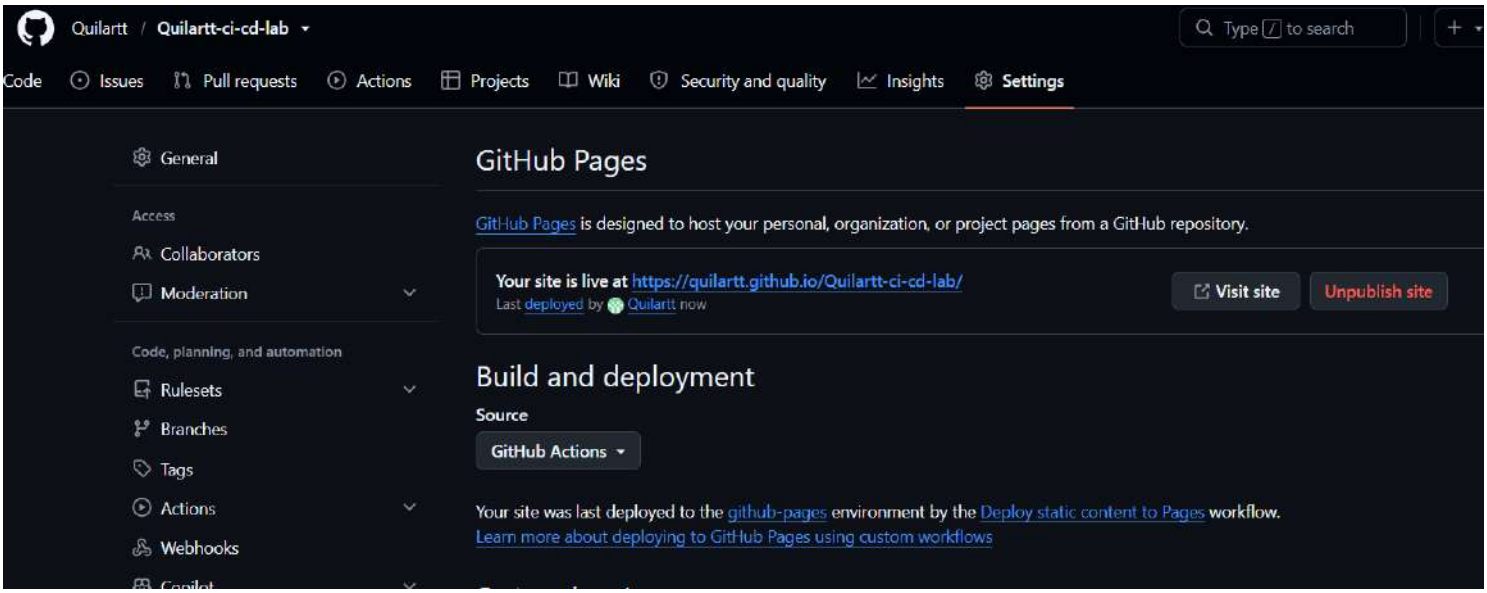

3.2. Содержимое pages.yml

index.html | pages.yml | Расширение: GitHub Actions | pipeline.yml

.github > workflows > pages.yml

```yaml
# Simple workflow for deploying static content to GitHub Pages
name: Deploy static content to Pages

on:
  # Runs on pushes targeting the default branch
  push:
    branches: ["main"]


  # Allows you to run this workflow manually from the Actions tab
  workflow_dispatch:

# Sets permissions of the GITHUB_TOKEN to allow deployment to GitHub Pages
permissions:
  contents: read
  pages: write
  id-token: write


# Allow only one concurrent deployment, skipping runs queued between the run in-progress and latest queued.
# However, do NOT cancel in-progress runs as we want to allow these production deployments to complete.
concurrency:
  group: "pages"
  cancel-in-progress: false

jobs:
  # Single deploy job since we're just deploying
  deploy:
    environment:
      name: github-pages
      url: ${{ steps.deployment.outputs.page_url }}
    runs-on: ubuntu-latest
    steps:
      - name: Checkout
        uses: actions/checkout@v4
      - name: Setup Pages
        uses: actions/configure-pages@v5
      - name: Upload artifact
        uses: actions/upload-pages-artifact@v3
        with:
          # Upload entire repository
          path: '.'
      - name: Deploy to GitHub Pages
        id: deployment
        uses: actions/deploy-pages@v5
```


3.3. Успешный run Pages

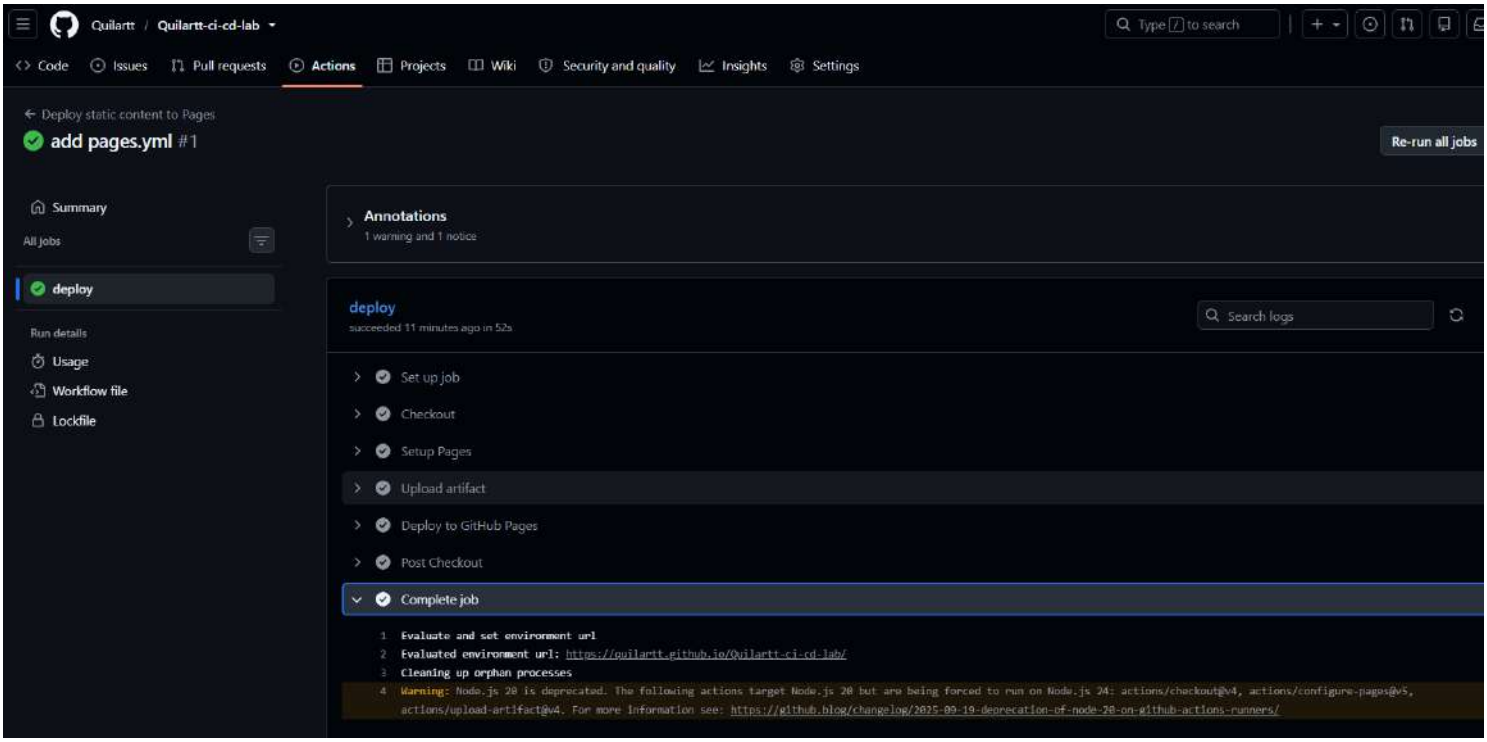


3.4. Публичный URL сайта

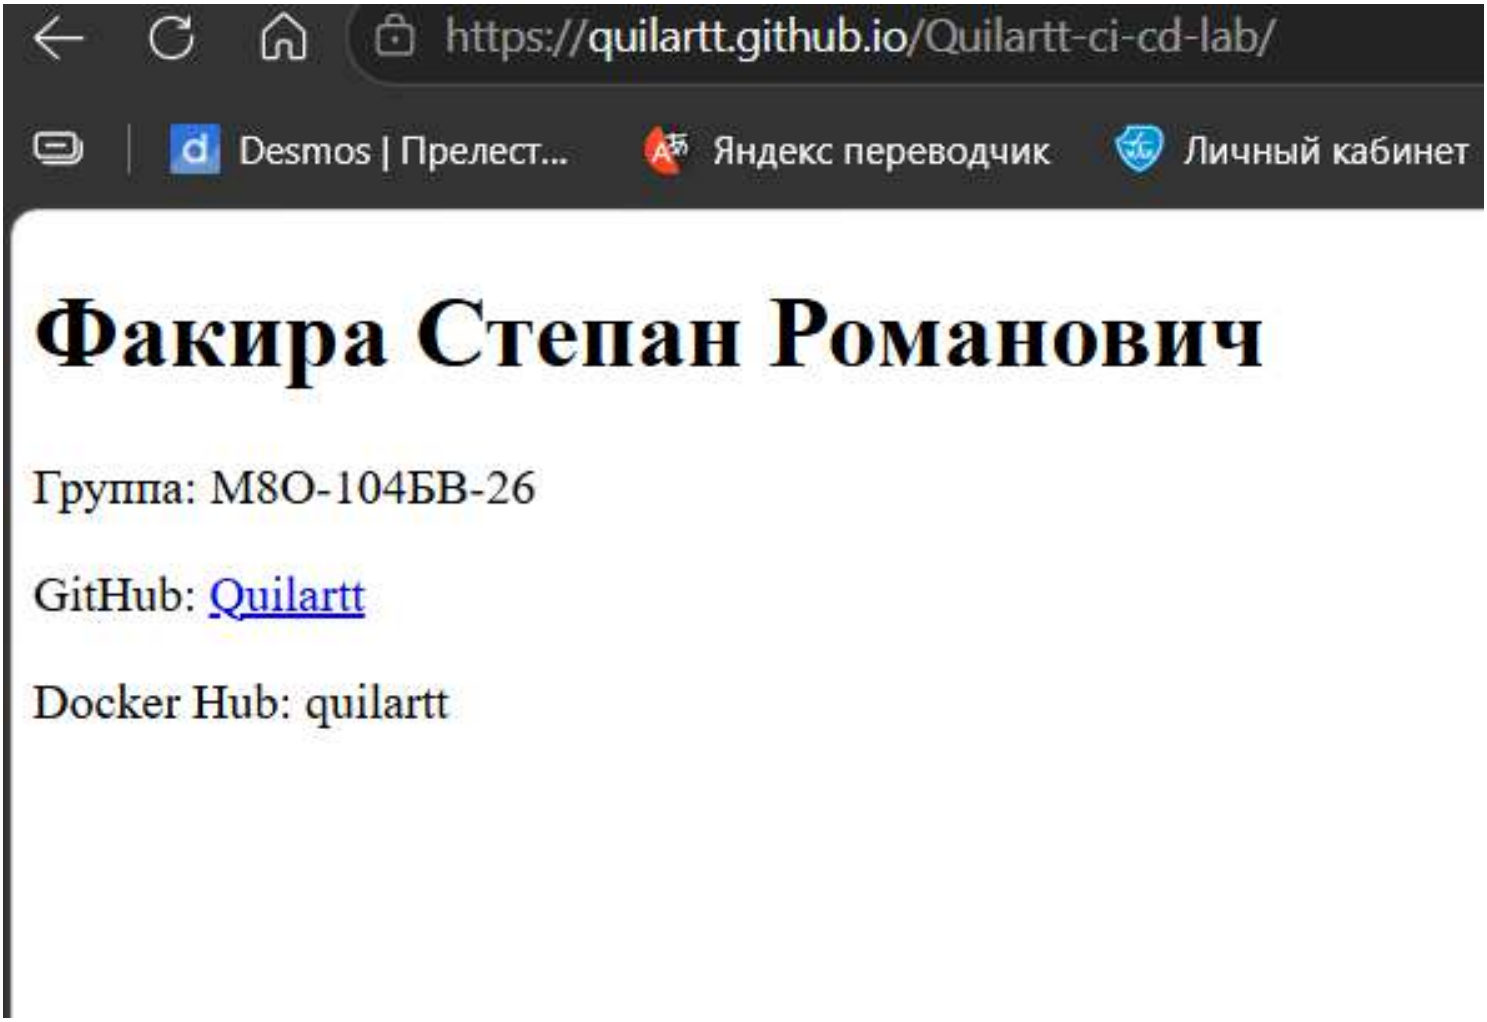


3.5. Обновление публичного сайта

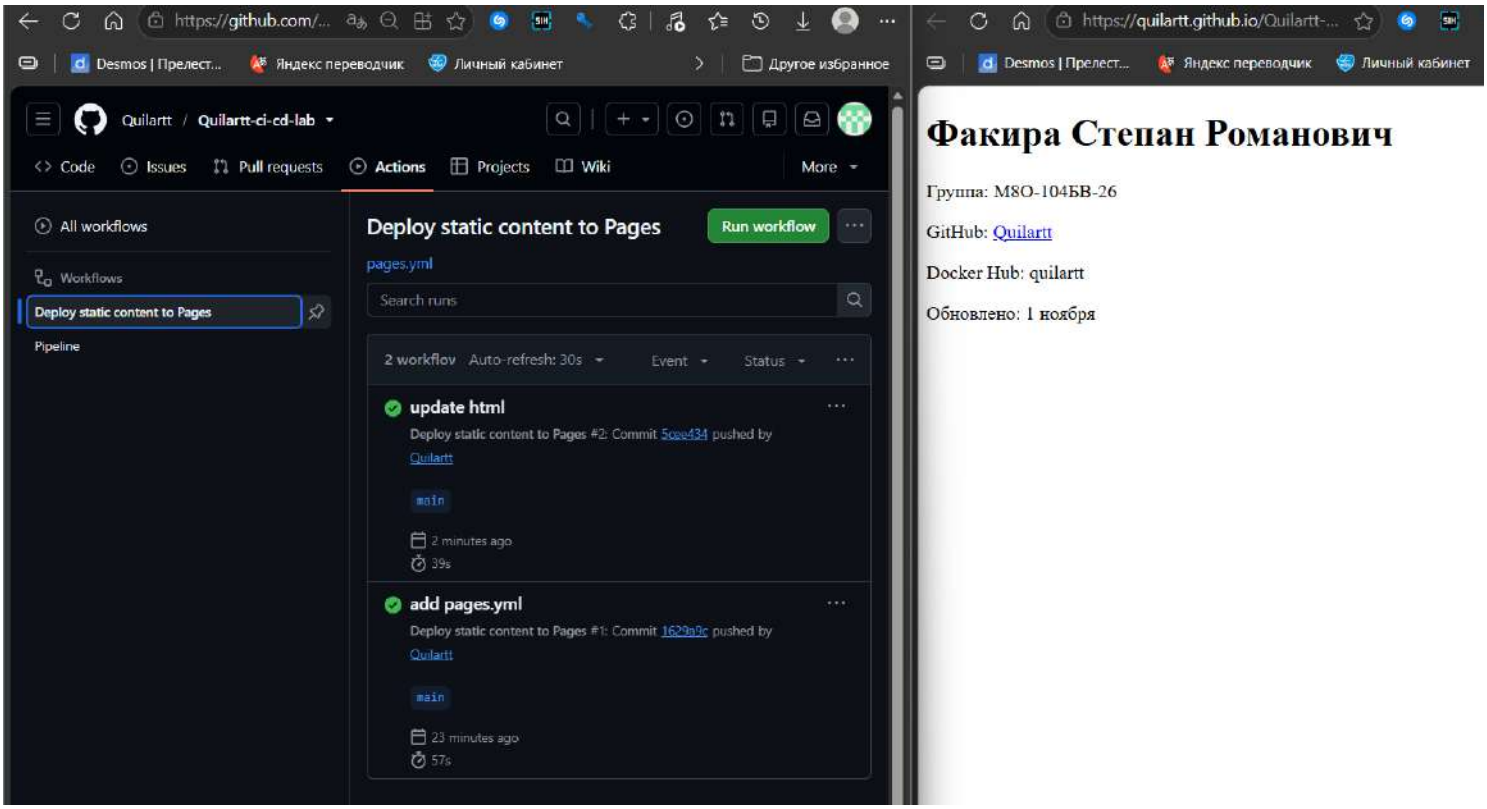

4.1. Вкладка Actions: зелёные run-ы

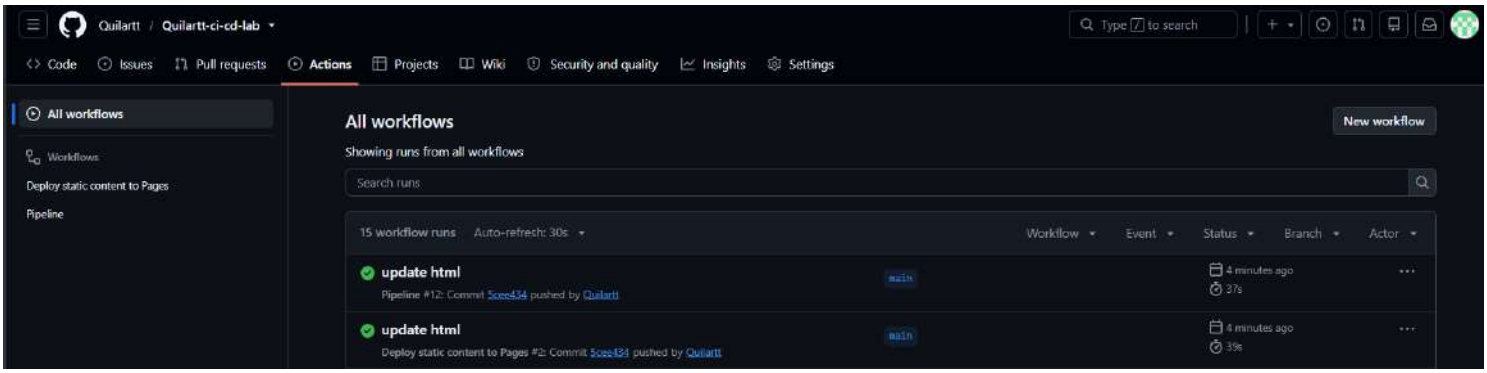

4.2. История коммитов

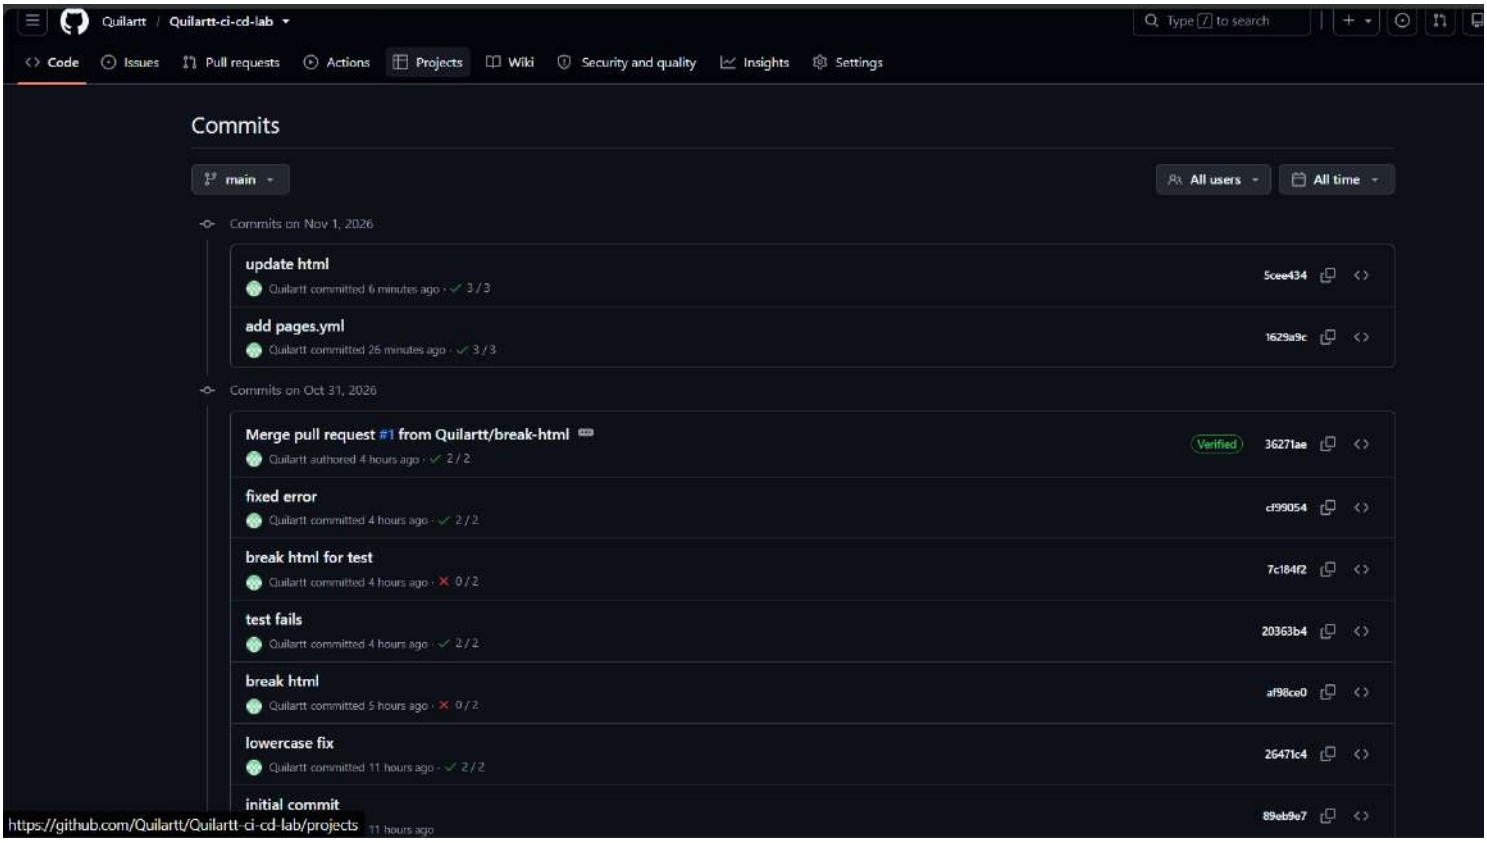

4.3. Структура репозитория

