RLumCarlo: Tedious features - fine examples

Sebastian Kreutzer, Johannes Friedrich, Vasilis Pagonis, Christoph Schmidt

RLumCarlo: v0.1.0.9000.137 | Last modified: 2019-12-02

1 Scope

RLumCarlo is a collection of energy-band models to simulate luminescence signals in dosimeteric materials using Monte-Carlo (MC) methods for various stimulation modes. This document aims at supplementing the package documentation and it elaborates the package examples.

2 The models in RLumCarlo

The following table lists all models implemented in RLumCarlo along with the **R** function call and the corresponding R (*.R) and C++ (*.cpp) files. The modelling takes place in the C++ functions which are wrapped by the R functions with a similar name. If you, however, want to cross-check the code, you should inspect files with the ending `.cpp`.

MODEL_NAME	R_CALL	CORRESPONDING_FILES
MC_CW_IRSL_LOC	run_MC_CW_IRSL_LOC()	R/run_MC_CW_IRSL_LOC.R src/MC_C_MC_CW_IRSL_LOC.cpp
MC_CW_IRSL_TUN	run_MC_CW_IRSL_TUN()	R/run_MC_CW_IRSL_TUN.R src/MC_C_MC_CW_IRSL_TUN.cpp
MC_CW_OSL_DELOC	run_MC_CW_OSL_DELOC()	R/run_MC_CW_OSL_DELOC.R src/MC_C_MC_CW_OSL_DELOC.cpp
MC_ISO_DELOC	run_MC_ISO_DELOC()	R/run_MC_ISO_DELOC.R src/MC_C_MC_ISO_DELOC.cpp
MC_ISO_LOC	run_MC_ISO_LOC()	R/run_MC_ISO_LOC.R src/MC_C_MC_ISO_LOC.cpp
MC_ISO_TUN	run_MC_ISO_TUN()	R/run_MC_ISO_TUN.R src/MC_C_MC_ISO_TUN.cpp
MC_LM_OSL_DELOC	run_MC_LM_OSL_DELOC()	R/run_MC_LM_OSL_DELOC.R src/MC_C_MC_LM_OSL_DELOC.cpp
MC_LM_OSL_LOC	run_MC_LM_OSL_LOC()	R/run_MC_LM_OSL_LOC.R src/MC_C_MC_LM_OSL_LOC.cpp
MC_LM_OSL_TUN	run_MC_LM_OSL_TUN()	R/run_MC_LM_OSL_TUN.R src/MC_C_MC_LM_OSL_TUN.cpp
MC_TL_DELOC	run_MC_TL_DELOC()	R/run_MC_TL_DELOC.R src/MC_C_MC_TL_DELOC.cpp
MC_TL_LOC	run_MC_TL_LOC()	R/run_MC_TL_LOC.R src/MC_C_MC_TL_LOC.cpp
MC_TL_TUN	run_MC_TL_TUN()	R/run_MC_TL_TUN.R src/MC_C_MC_TL_TUN.cpp

Each model is run by calling one of the **R** functions starting with `run_`. Currently, three different model types (TUN: tunnelling, LOC: localised transition, DELOC: delocalised transition) are implemented for the stimulation types TL, IRSL, LM-OSL, and ISO (isothermal). Please note that each model has different parameters and requirements.

3   RLumCarlo model parameters and variables

The following table summarises the parameters used in the implemented MC models along with their physical meaning, units and the range of realistic values. This range represents just a rough guideline and might be exceeded for particular cases.

```
## Warning in scan(file = file, what = what, sep = sep, quote = quote, dec = dec, :
## EOF within quoted string

## Warning in scan(file = file, what = what, sep = sep, quote = quote, dec = dec, :
## number of items read is not a multiple of the number of columns
```

Stimulation mode	Parameter	Parameter description	Unit	Realistic values
Delocalized TL	E	Thermal activation energy of the trap	eV	0.5–3,
	s	Frequency factor of the trap	1/s	1E8–1E16,
	times	Sequence of time steps for simulation (heating rate is 1 K/s)	s	0–700 ,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Total number of electron traps available	1	2–1E5,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	R	Delocalized retrapping ratio	1	0–1,
Delocalized CW-IRSL	A	Optical excitation rate from trap to conduction band	1/s	1E-3–1,
	times	Sequence of time steps for simulation	s	0–500,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Total number of electron traps available	1	2–1E5,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	R	Delocalized retrapping ratio	1	0–1,
Delocalized ISO	E	Thermal activation energy of the trap	eV	0.5–3,
	s	Frequency factor of the trap	1/s	1E8–1E16,
	T	Temperature of the isothermal process	°C	20–300,
	times	Sequence of time steps for simulation	s	0–1000,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Number of electrons	1	2–1E5,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	R	Delocalized retrapping ratio	1	0–1,
Delocalized LM-OSL	A	Optical excitation rate from trap to conduction band	1/s	1E-3–1,
	times	Sequence of time steps for simulation	s	0–3000,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Total number of electron traps available	1	2–1E5,

	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	R	Delocalized retrapping ratio	1	0–1,
				,
Localized TL	E	Thermal activation energy of the trap	eV	0.5–3,
	s	Frequency factor of the trap	1/s	1E8–1E16,
	times	Sequence of time steps for simulation (heating rate 1 K/s)	s	0–700 ,
	clusters	Number of MC runs	1	1E1–1E4,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	r	Localized retrapping ratio	1	0–1E5,
Localized CW-IRSL	A	Optical excitation rate from ground state of the trap to the excited state	1/s	1E-3–1,
	times	Sequence of time steps for simulation	s	0–500,
	clusters	Number of MC runs	1	1E1–1E4,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	r	Localized retrapping ratio	1	0–1E5,
Localized ISO	E	Thermal activation energy of the trap	eV	0.5–3,
	s	Frequency factor of the trap	1/s	1E8–1E16,
	T	Temperature of the isothermal process	°C	20–300,
	times	Sequence of time steps for simulation	s	0–1000,
	clusters	Number of MC runs	1	1E1–1E4,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	r	Localized retrapping ratio	1	0–1E5,
Localized LM-OSL	A	Optical excitation rate from ground state of the trap to the excited state	1/s	1E-3–1,
	times	Sequence of time steps for simulation	s	0–3000,
	clusters	Number of MC runs	1	1E1–1E4,
	n_filled	Number of filled electron traps at the beginning of the simulation	1	1–1E5,
	r	Localized retrapping ratio	1	0–1E5,
				,
TL with tunneling recombination	E	Thermal activation energy of the trap	eV	0.5–3,
	s	Effective frequency factor of the tunneling process	1/s	1E8–1E16,
	rho	Dimensionless density of recombination centers (defined as ρ' in Huntley 2006)	1	1E-7–1E-4,
	r_c	Critical distance (>0) that is to be inserted if the sample has been thermally and/or optically pretreated, so that the electron-hole pairs within r_c have already recombined	1	0–2
	times	Sequence of time steps for simulation (heating rate 1 K/s)	s	0–700,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Total number of electron traps available	1	2–1E5,

	delta.r	Increments of the unitless distance parameter r;1;1E-3–1E-1, CW-IRSL with tunneling recombination;A ;Effective optical excitation rate of the tunneling process;1/s;1E-3–1, ;rho;Dimensionless density of recombination centers (defined as ρ' in Huntley 2006);1;1E-7–1E-4, ;times;Sequence of time steps for simulation;s;0–500, ;clusters;Number of MC runs;1;1E1–1E4, ;N_e;Total number of electron traps available;1;2–1E5, ;r_c ;Critical distance (>0) that is to be inserted if the sample has been thermally and/or optically pretreated, so that the electron-hole pairs within r_c have already recombined;1;0–2 ;delta.r;Increments of the unitless distance parameter r;1;1E-3–1E-1, ISO with tunneling recombination;E;Thermal activation energy of the trap;eV;0.5–3, ;s;Effective frequency factor of the tunneling process;1/s;1E8–1E16, ;T;Temperature of the isothermal process;°C;20–300, ;rho;Dimensionless density of recombination centers (defined as ρ' in Huntley 2006);1;1E-7–1E-4, ;times;Sequence of time steps for simulation;s;0–1000, ;clusters;Number of MC runs;1;1E1–1E4, ;N_e;Total number of electron traps available;1;2–1E5, ;r_c ;Critical distance (>0) that is to be inserted if the sample has been thermally and/or optically pretreated, so that the electron-hole pairs within r_c have already recombined;1;0–2 ;delta.r;Increments of the unitless distance parameter r	1	1E-3–1E-1,
LM-OSL with tunneling recombination	A	Effective optical excitation rate of the tunneling process	1/s	1E-3–1,
	rho	Dimensionless density of recombination centers (defined as ρ' in Huntley 2006)	1	1E-7–1E-4,
	times	Sequence of time steps for simulation	s	0–3000,
	clusters	Number of MC runs	1	1E1–1E4,
	N_e	Total number of electron traps available	1	2–1E5,
	r_c	Critical distance (>0) that is to be inserted if the sample has been thermally and/or optically pretreated, so that the electron-hole pairs within r_c have already recombined	1	0–2
	delta.r	Increments of the unitless distance parameter r;1;1E-3–1E-1,		

4 Examples

The following examples illustrate the capacity of RLumCarlo, by using code-snippets deploying longer simulation times than allowed for the standard package examples, which aim at a functionality test.

4.1 Example 1: A first example

The first examples an iso-thermal curve using the tunnelling model (other models work similar). Returned are either the simulated signal or the estimated remaining charges. The Function `plot_RLumCarlo()` provides an easy way to visualise the modelling results and is here called using the tee operator `%T>` from the package `magrittr` (which is imported by RLumCarlo). Simulation results are stored in the object `results` while, at the same time, piped to the function `plot_RLumCarlo()` for the output visualisation.

4.1.1 Model the signal

The most obvious modelling output is the luminescence signal itself, our example below simulates an iso-thermal (ITL) signal for a temperature (T) of 200 °C over 5,000 s using a tunnelling transition model. Trap parameters are $E = 1.2$ eV for the trap depth and a frequency factor for 1×10^{10} (1/s). The parameter `rho` (ρ') defines the recombination centre density.

```
results <- run_MC_ISO_TUN(
  E = 1.2,
  s = 1e10,
  T = 200,
  rho = 0.007,
  times = seq(0, 5000)
) %T>%
  plot_RLumCarlo(norm = TRUE, legend = TRUE)
```
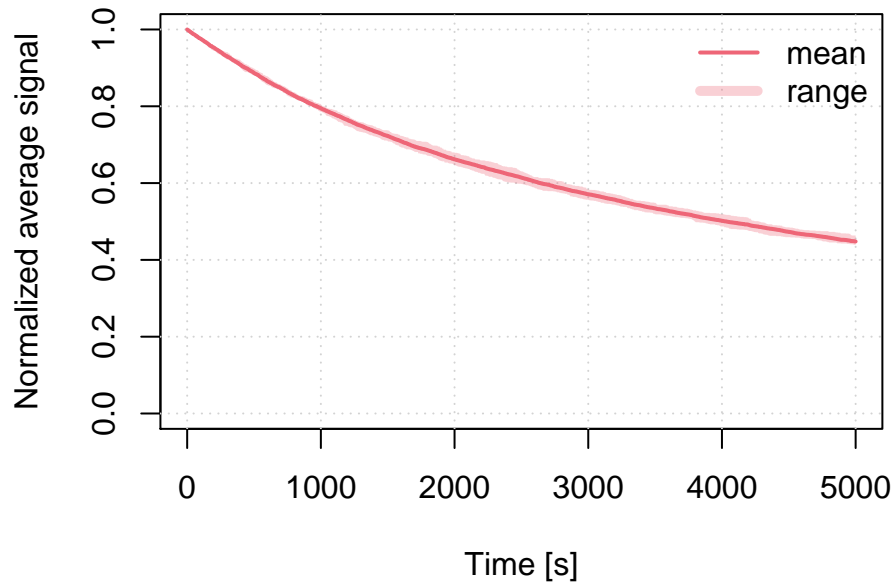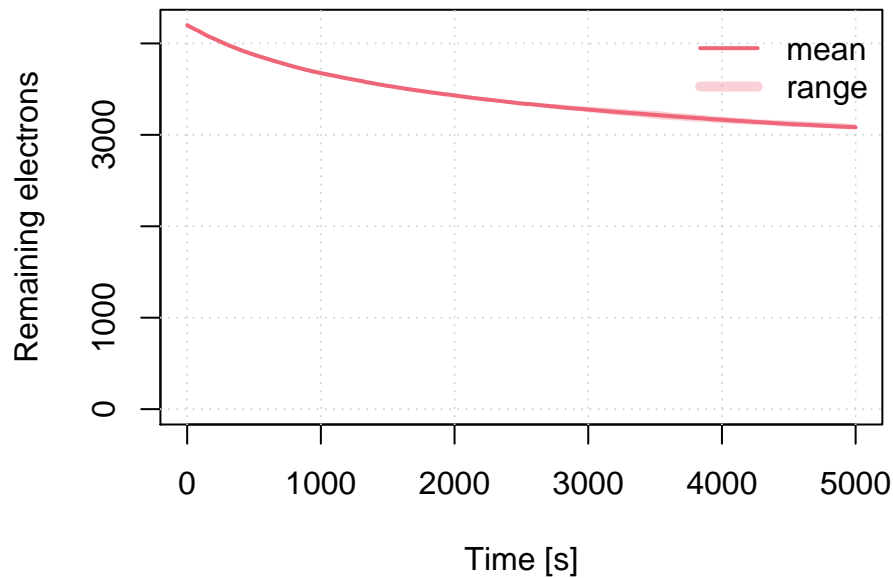

4.1.2 Model remaining charges

The first example can be slightly altered to provide alternative insight. Instead of the luminescence signal, the variant below returns the number of remaining electrons in the trap.

```
results <- run_MC_ISO_TUN(
  E = 1.2,
  s = 1e10,
  T = 200,
  rho = 0.007,
  times = seq(0, 5000),
  output = "remaining_e"
) %T>%
  plot_RLumCarlo(
    legend = TRUE,
    ylab = "Remaining electrons"
    )
```

4.1.3 Understanding the numerical output

In both cases the modelling output is an object of class `RLumCarlo_Model_Output`, which is basically a list consisting of an `array` and a `numeric` (vector).

```
str(results)
```

```
## List of 2
##  $ signal: num [1:5001, 1:21, 1:10] 200 199 199 199 199 199 199 198 197 197 ...
##   ..- attr(*, "dimnames")=List of 3
##   .. ..$ : NULL
##   .. ..$ : NULL
##   .. ..$ : NULL
##  $ time  : int [1:5001] 0 1 2 3 4 5 6 7 8 9 ...
##  - attr(*, "class")= chr "RLumCarlo_Model_Output"
##  - attr(*, "model")= chr "run_MC_ISO_TUN"
```

While this represents the full modelling output results, its interpretation might be less straight forward, and the user may want to condense the information via `summary()`. The function `summary()` is also used internally by the function `plot_RLumCarlo()` to simplify the data before there are plotted.

```
df <- summary(results)
```

```
##       time             mean            y_min            y_max              sd
##  Min.   :   0   Min.   :3083   Min.   :3058   Min.   :3118   Min.   : 0.4216
##  1st Qu.:1250   1st Qu.:3191   1st Qu.:3151   1st Qu.:3230   1st Qu.:11.9671
##  Median :2500   Median :3343   Median :3323   Median :3358   Median :13.6561
##  Mean   :2500   Mean   :3425   Mean   :3400   Mean   :3451   Mean   :15.6721
##  3rd Qu.:3750   3rd Qu.:3602   3rd Qu.:3587   3rd Qu.:3617   3rd Qu.:20.0953
##  Max.   :5000   Max.   :4200   Max.   :4199   Max.   :4200   Max.   :24.8068
##       var
##  Min.   :  0.1778
##  1st Qu.:143.2111
##  Median :186.4889
##  Mean   :267.7090
##  3rd Qu.:403.8222
##  Max.   :615.3778
```

```
head(df)
```

```
##   time   mean y_min y_max        sd       var
## 1    0 4199.8  4199  4200 0.4216370 0.1777778
## 2    1 4198.6  4197  4200 1.0749677 1.1555556
## 3    2 4197.9  4196  4199 1.1005049 1.2111111
## 4    3 4197.5  4196  4199 1.1785113 1.3888889
## 5    4 4196.8  4196  4198 0.7888106 0.6222222
## 6    5 4196.0  4193  4198 1.3333333 1.7777778
```

The call summarises the modelling results and returns a terminal output and a `data.frame` with, e.g., the mean or the standard deviation, which can be used to create plots for further insight. For instance, the stimulation time against coefficient of variation (CV in %):

```
plot(
  x = df$time,
  y = (df$sd / df$mean) * 100,
  pch = 20,
  col = rgb(0,0,0,.1),
  xlab = "Stimulation time [s]",
  ylab = "CV [%]"
)
```
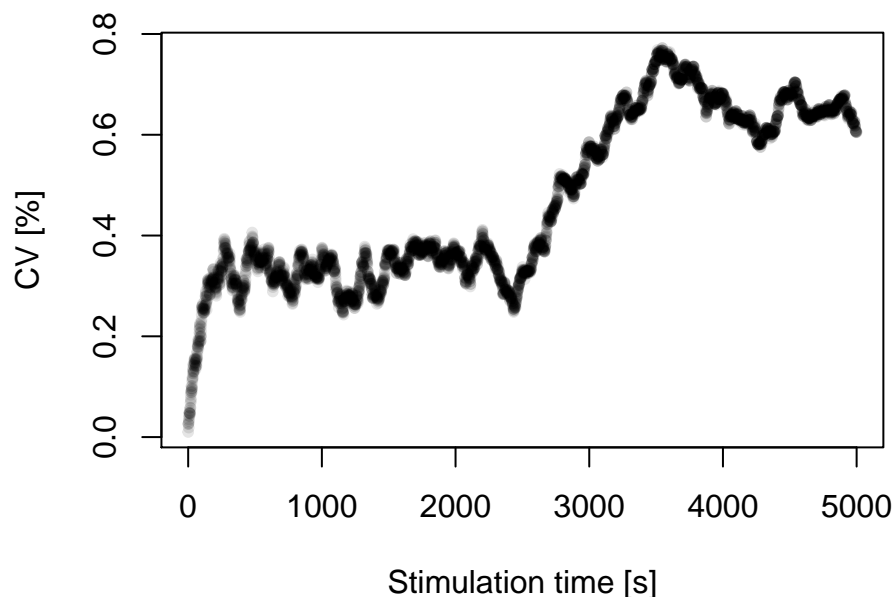

## 4.2   Example 2: Combining two plots

The following examples use again the tunnelling model but for continuous wave (CW) infrared light stimulation (IRSL), and they combine two plots in one single plot window.

```
## set time vector
times <- seq(0, 1000)

## Run MC simulation
run_MC_CW_IRSL_TUN(A = 0.12, rho = 0.003, times = times) %>%
  plot_RLumCarlo(norm = TRUE, legend = TRUE)

run_MC_CW_IRSL_TUN(A = 0.21, rho = 0.003, times = times) %>%
```

```
plot_RLumCarlo(norm = TRUE, add = TRUE)
```
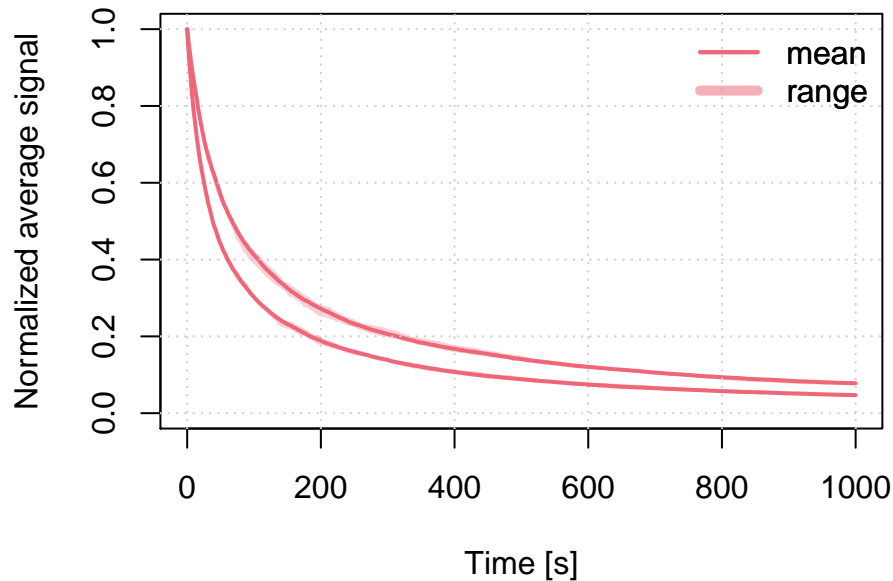

4.3   Example 3: Testing different parameters

The example above can be further extended to test the effect of different parameters. Contrary to the example above, here the results are stored in a `list` and `plot_RLumCarlo()` is called only one time and it will then iterate automatically over the results to create a combined plot.

```
s <- 3.5e12
rho <- 0.015
E <- 1.45
r_c <- c(0,0.7,0.77,0.86, 0.97)
times <- seq(100, 450) # here time = temperature
results <- lapply(r_c, function(x) {
  run_MC_TL_TUN(
    s = s,
    E = E,
    rho = rho,
    r_c = x,
    times = times
  )

})
```

The plot output can be highly customised to provide a better visual experience, e.g., the manual setting of the colours and the legend.

```
## plot curves, but without legend
plot_RLumCarlo(
  object = results,
  ylab = "normalised TL signal",
  xlab = "Temperature [\u00b0C]",
  plot_uncertainty = "range",
  col = khroma::colour("bright")(length(r_c)),
  legend = FALSE,
  norm = TRUE
```

```
)

## add legend manually
legend(
  "topleft",
  bty = "n",
  legend = paste0("r_c: ", r_c),
  lty = 1,
  col = khroma::colour("bright")(length(r_c))
)
```