


get_vector

has_interrupt

_resolve

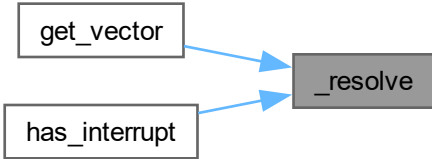

```
graph LR; A[get_vector] --> C[_resolve]; B[has_interrupt] --> C;
```

The diagram illustrates a flow where two functions, 'get_vector' and 'has_interrupt', both point to a single target function, '_resolve'. 'get_vector' is in a white box at the top left, and 'has_interrupt' is in a white box at the bottom left. Both have blue arrows pointing to the right, where a gray box contains the text '_resolve'.