


modules.io.i8259.I8259.get
_vector

modules.io.i8259.I8259.has
_interrupt

modules.io.i8259.I8259.
_resolve

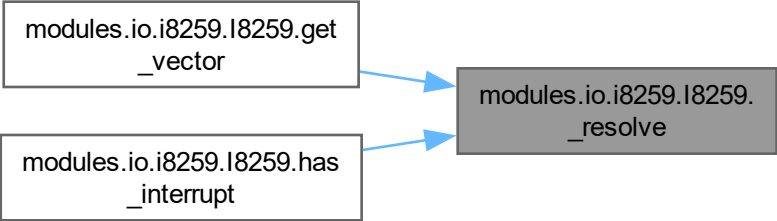

```
graph LR; A[modules.io.i8259.I8259.get_vector] --> C[modules.io.i8259.I8259._resolve]; B[modules.io.i8259.I8259.has_interrupt] --> C;
```

The diagram illustrates a mapping or resolution process. On the left, there are two white rectangular boxes with black borders. The top box contains the text 'modules.io.i8259.I8259.get_vector' and the bottom box contains 'modules.io.i8259.I8259.has_interrupt'. On the right, there is a single gray rectangular box with a black border containing the text 'modules.io.i8259.I8259._resolve'. Two blue arrows originate from the right side of the left boxes and point towards the left side of the gray box, indicating that both 'get_vector' and 'has_interrupt' are resolved to the '_resolve' method.