

[Open Api](#)[Openapi OAuth Service](#)[Get OAuth Token](#)

Get OAuth Token

Remarks

Interface Functionality:

This interface is used to obtain an access token under the OAuth 2.0 authorization framework. Through this interface, users or applications can obtain credentials to access restricted resources after authorization. The token can be used for authentication in subsequent API requests.

Applicable Scenarios:

This interface is applicable to scenarios where authorization is required to access protected resources, typically used in the OAuth 2.0 authorization flow such as "Authorization Code Grant", "Password Grant", "Client Credentials Grant", and others. It helps users or clients access APIs using tokens.

Restrictions and Considerations:

Request Parameters: Depending on the OAuth authorization mode, the following parameters may be required:

grant_type: Authorization type, such as `authorization_code`, `client_credentials`, etc.

client_id: Client ID, used to identify the caller.

client_secret: Client secret, used to authenticate the client's identity.

open_access_key: Communication key.


Token Validity Period: OAuth tokens are typically time-sensitive (24H). Users need to manage token renewal based on the token's expiration period to avoid token expiration and resource inaccessibility.


Security: To ensure security, the OAuth token must be requested over HTTPS to prevent token leakage.

Refresh Token: When the token is about to expire, a new access token can be obtained via the refresh token without re-authorization.

Call Frequency: The OAuth token retrieval interface may be subject to frequency limits. Frequent calls may trigger rate-limiting mechanisms, so it's recommended to control the number of requests appropriately.

How to obtain AK/SK: Please log in to the Developer Center to create them.

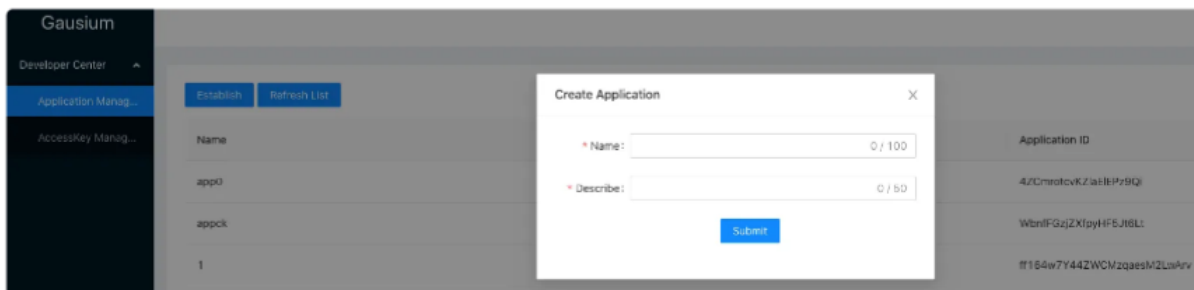

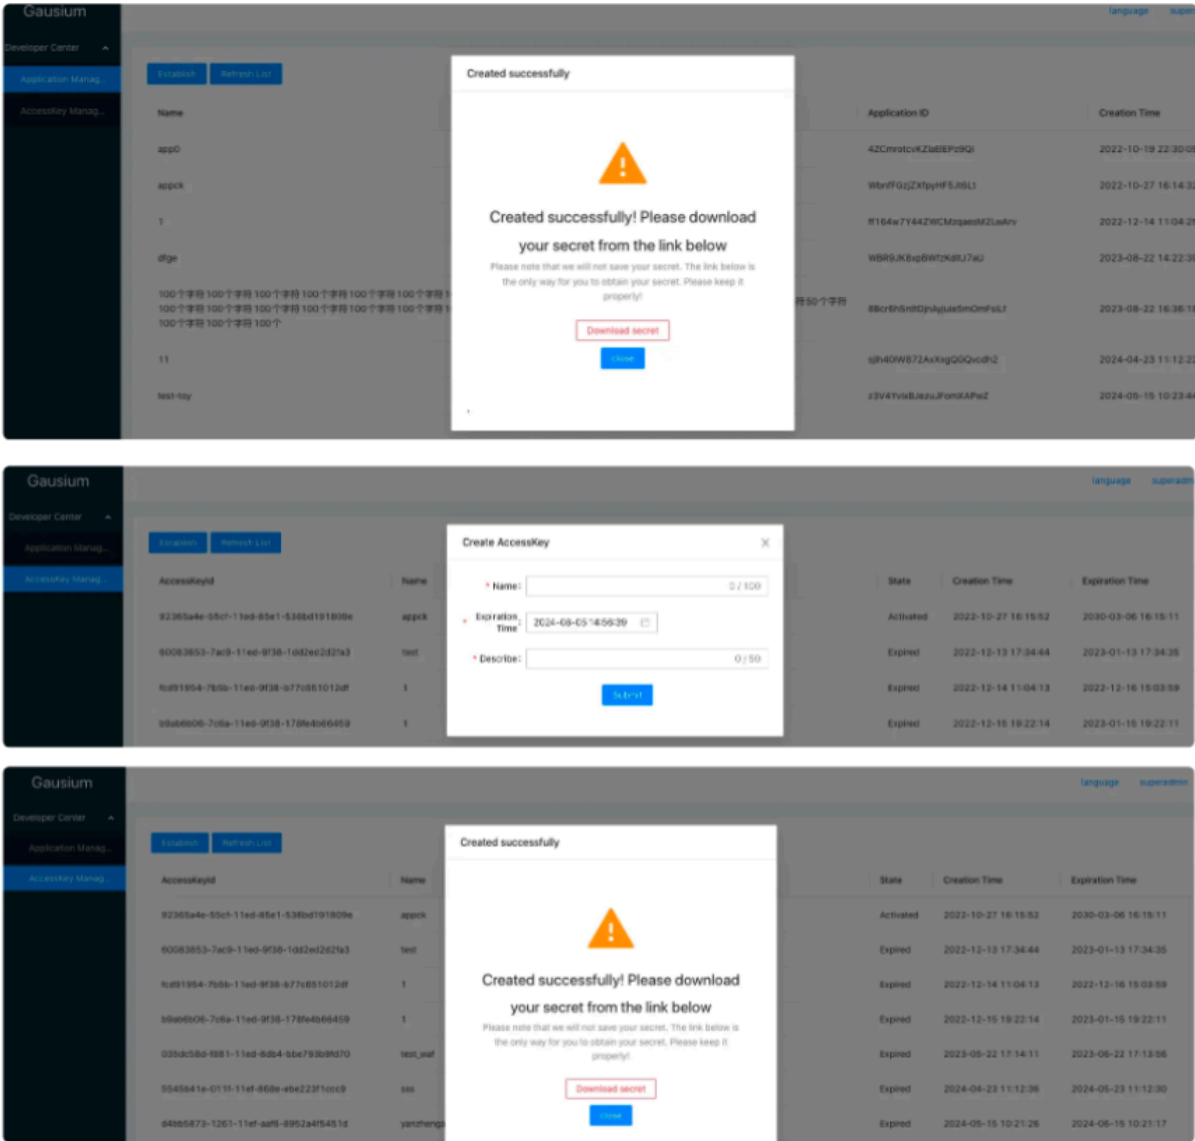

Interface Description

URL	Request Method
/gas/api/v1alpha1/oauth/token	POST

Headers

Name	Parameter Value	Required	Example	Remarks
Content-Type	application/json	Yes		

Body

Name	Type	Required	Remarks
grant_type	string		example "urn:gaussian:params:oauth:grant-type:open-access-token"
client_id	string		In the Application Management section, after establish an application, an application key file will be downloaded. The ClientID value in the file.
client_secret	string		In the Application Management section, after establishing an application, an application key file will be downloaded. The ClientSecret value in the file.
open_access_key	string		In the AccessKey Management section, after establishing an AccessKey, an AccessKey file will be downloaded. The AccessKeySecret value in the file.

Response Data

Name	Type	Remarks
token_type	string	Token Type
access_token	string	Access Token, used for security authentication when calling openapi interfaces. It is placed in the Authorization of the request header.
refresh_token	string	Refresh Token, used in conjunction with the access_token. When the access_token expires, the refresh_token enables an application to request a new access_token without requiring the user to go through the full login process again.
expires_in	null	Expiration time, UTC timestamp, unit: milliseconds

Request

```
curl --location 'https://openapi.gs-robot.com/gas/api/v1alpha1/oauth/token'
--header 'Content-Type: application/json'
--data '{
  "grant_type": "urn:gaussian:params:oauth:grant-type:open-access-token",
  "client_id": "{{client_id}}",
  "client_secret": "{{client_secret}}",
  "open_access_key": "{{open_access_key}}"
}'
```

Response

```
{
  "token_type": "bearer",
  "access_token": "{{token}}",
  "expires_in": 1726111975164,
  "refresh_token": "{{refresh_token}}"
}
```