Refer to this as the **Task-Conditioned** RL setting

5

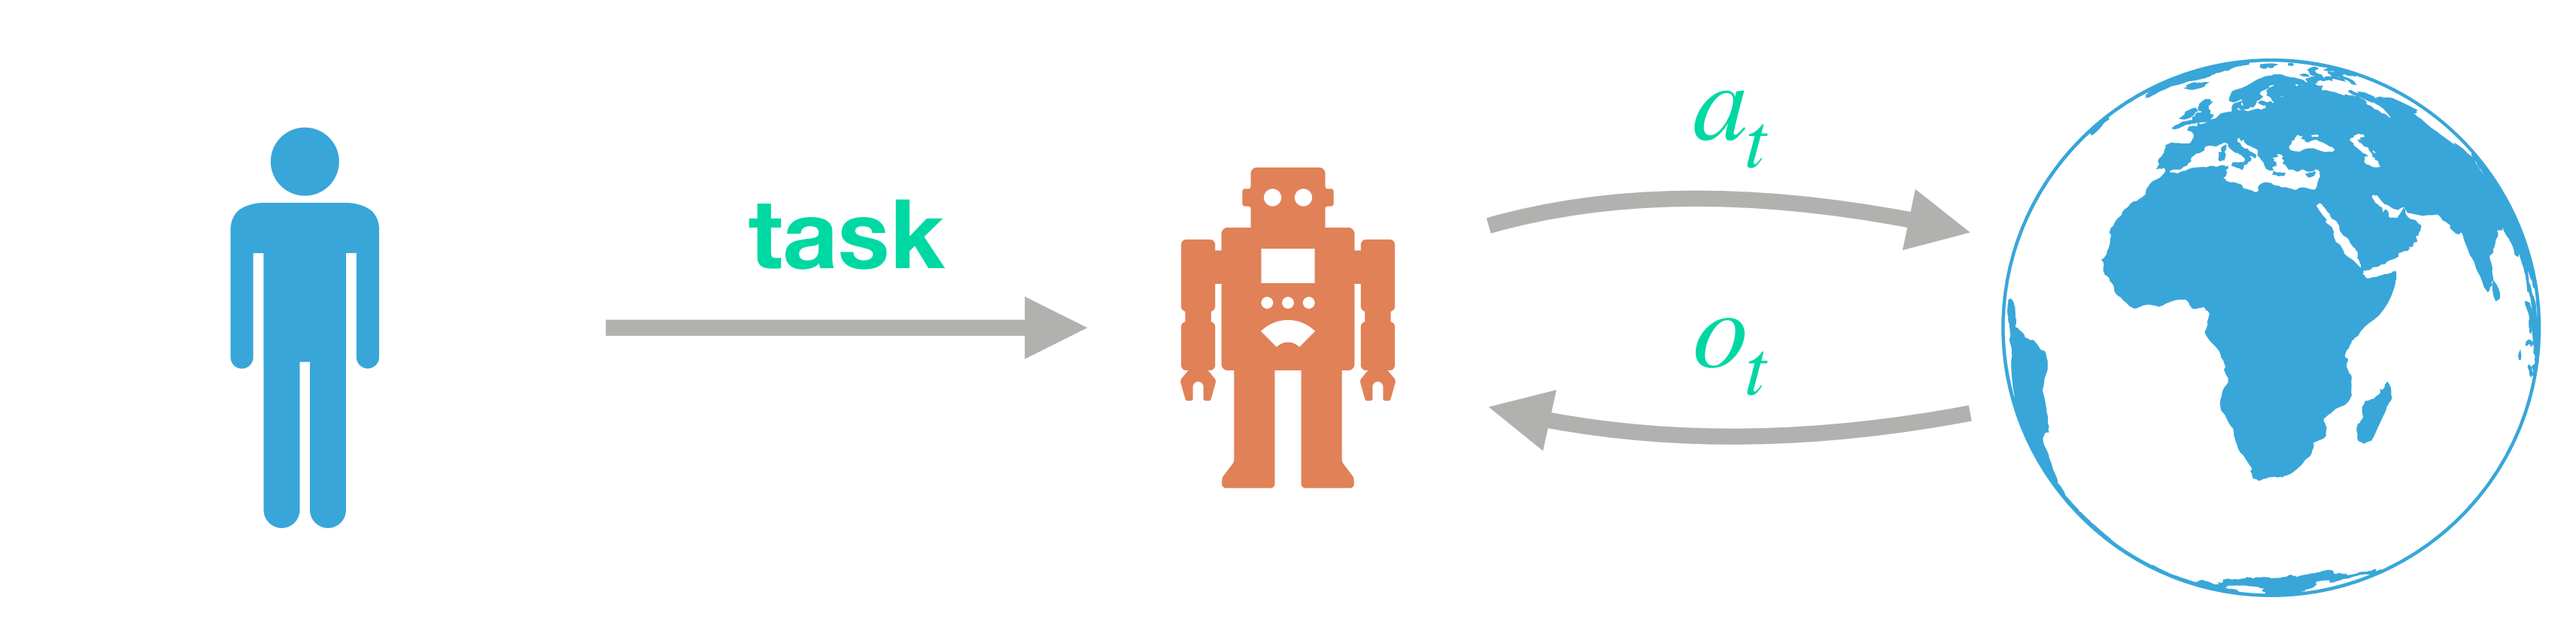
task
a_t
o_t

the agent doesn’t a priori know

what task will be asked to perform

Importantly,

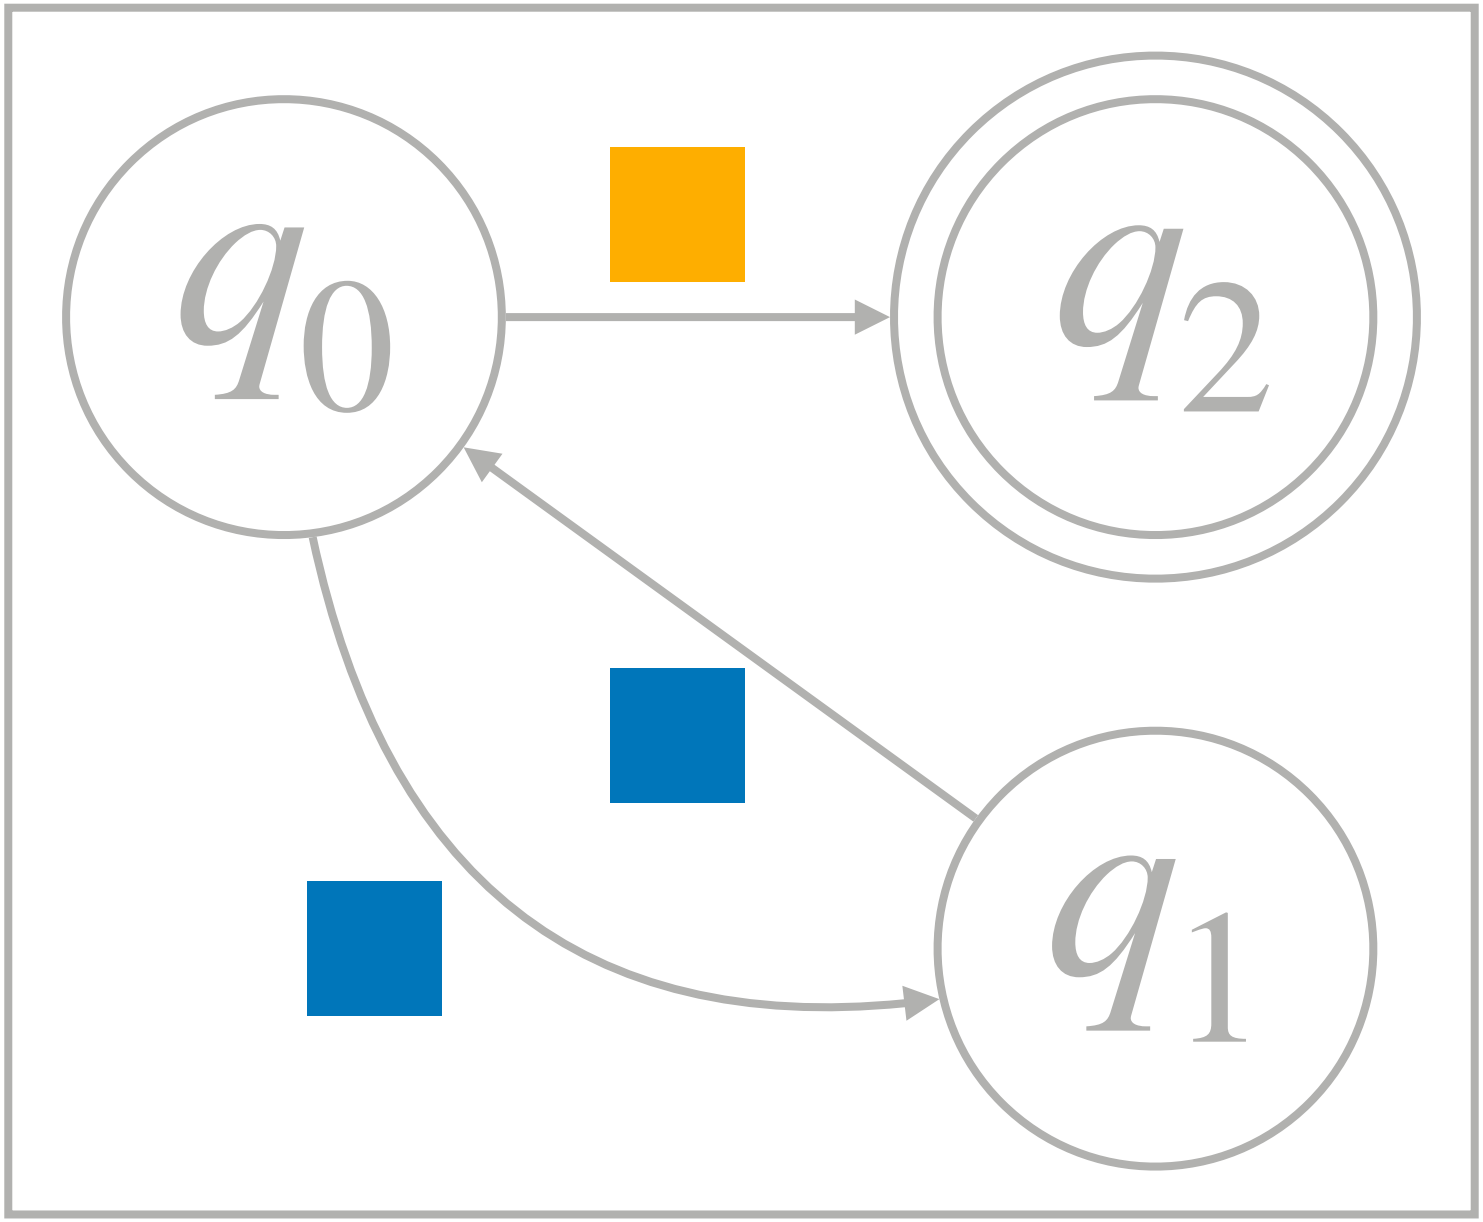
q_0
q_2
q_1

6