
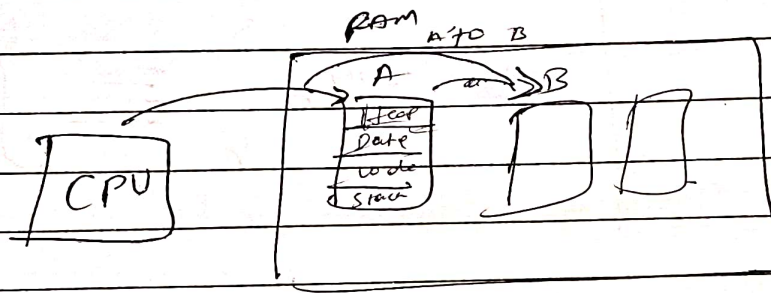


13 Process Threads part - 1


Why?

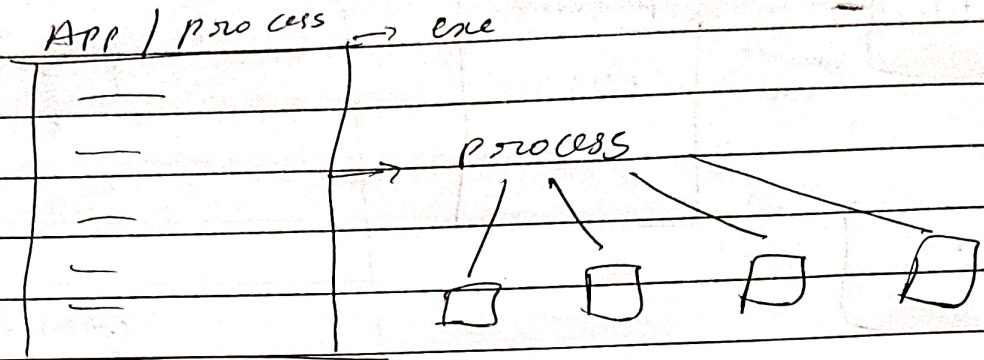


Context Switch :- when switching b/w A to B.

* IPC (Inter process communication)

- Techniques
- ↳ The process communicate each others by
 - ↳ By N/W (networking) / Sockets / Stream
 - ↳ By Messaging (1 process to other process)
 - ↳ By Shared memory

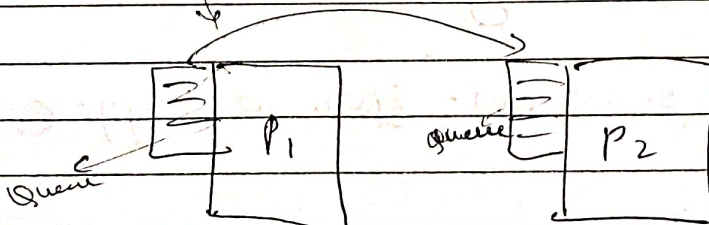

* Threads :-

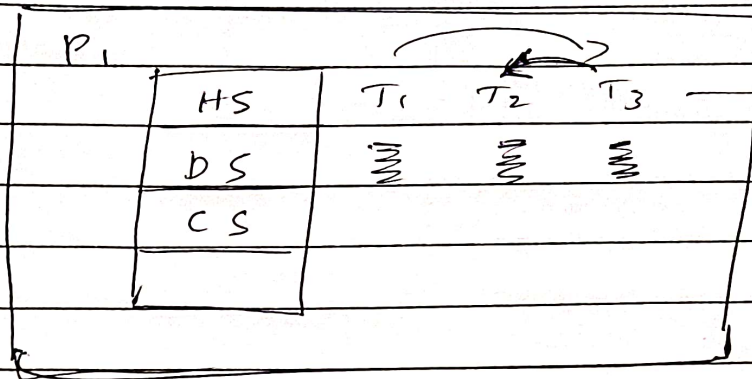

useful.

→ Context Switching

↳ low.

→ ~~EEP~~ IPC is

very easy

because of same

(heap memory).

* Thread Safe

Data Structure.



locked :. this it will use for
multithreaded.

without lock it will
corrupt.