
System containers


Current local implementation. Browser requests stay separate from offline evaluation.

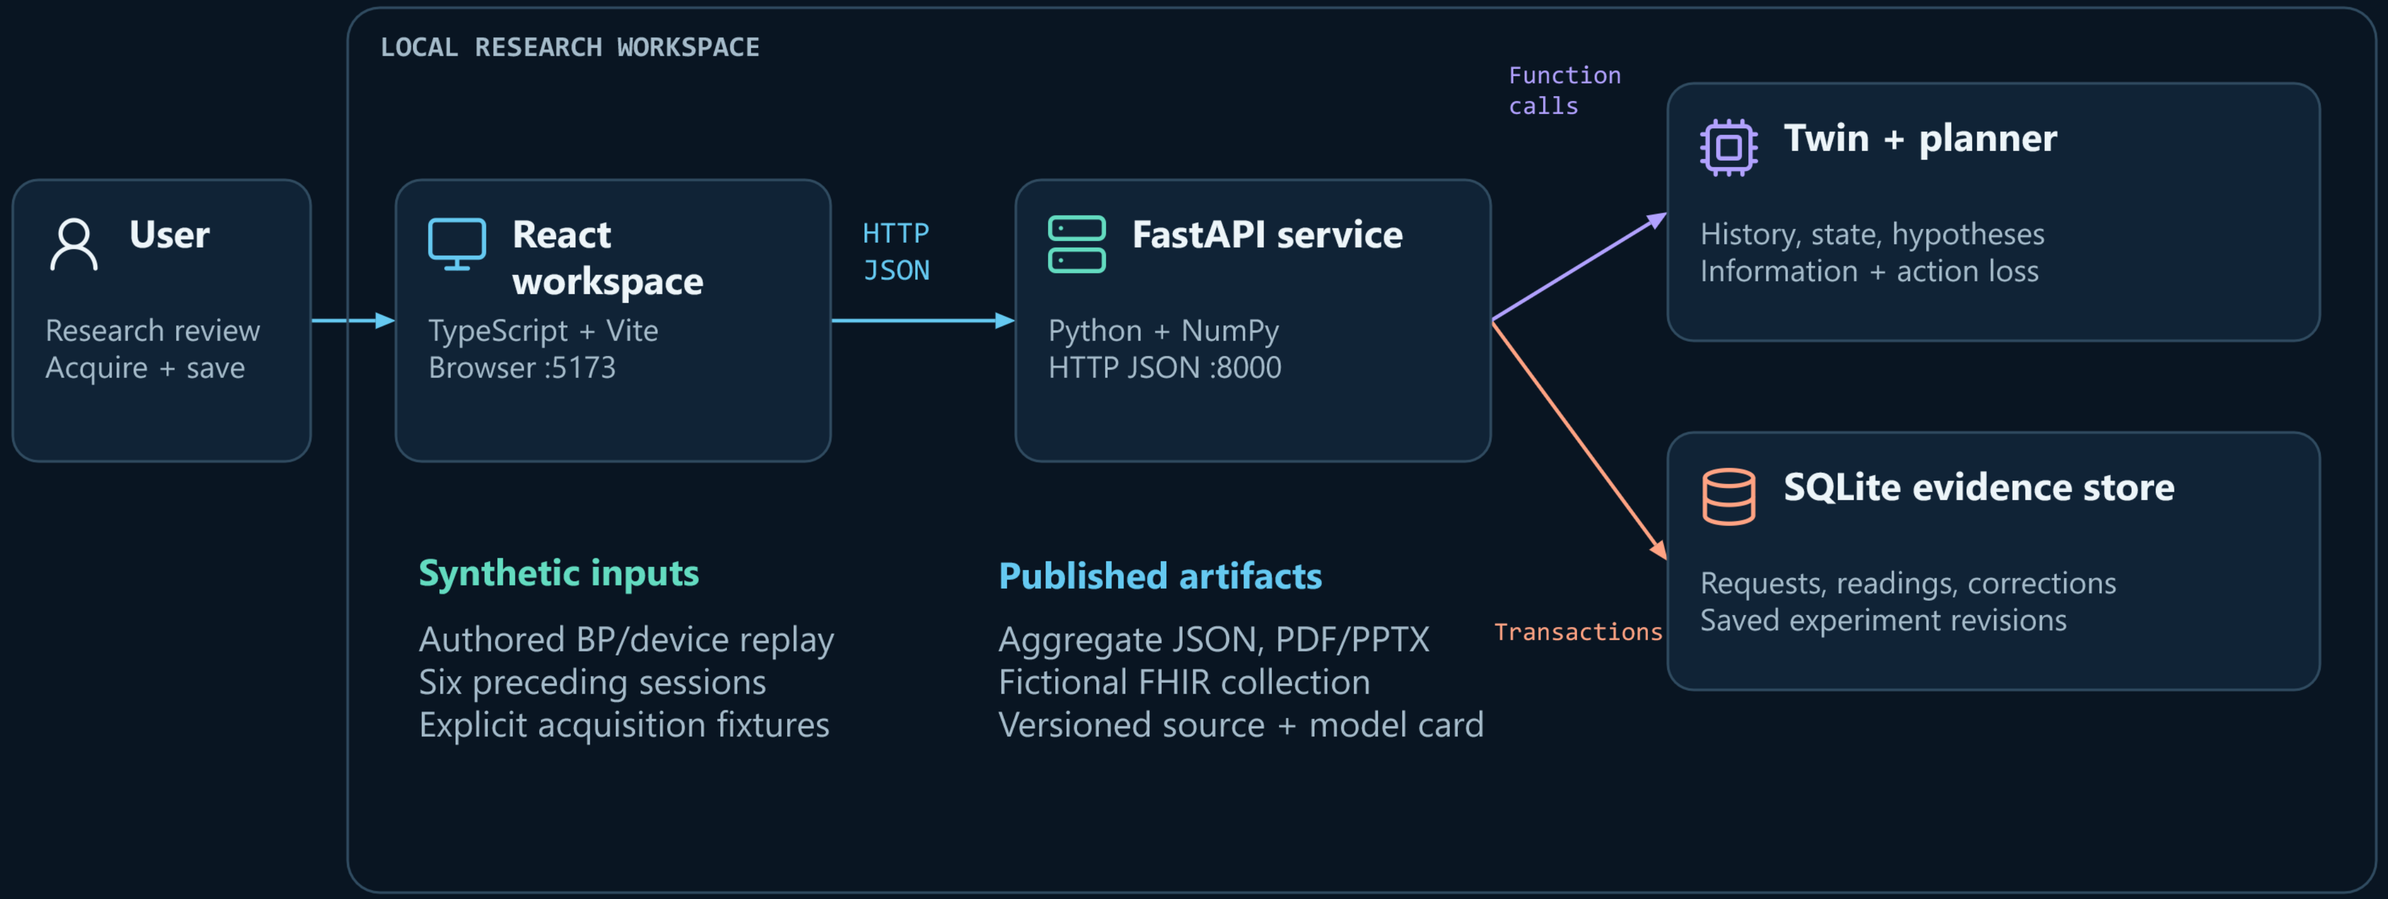

Observed HEMOBP modeling runs offline and supplies evaluation reports, not the synthetic twin state.

Inference components

One API process orchestrates distinct model and evidence responsibilities.

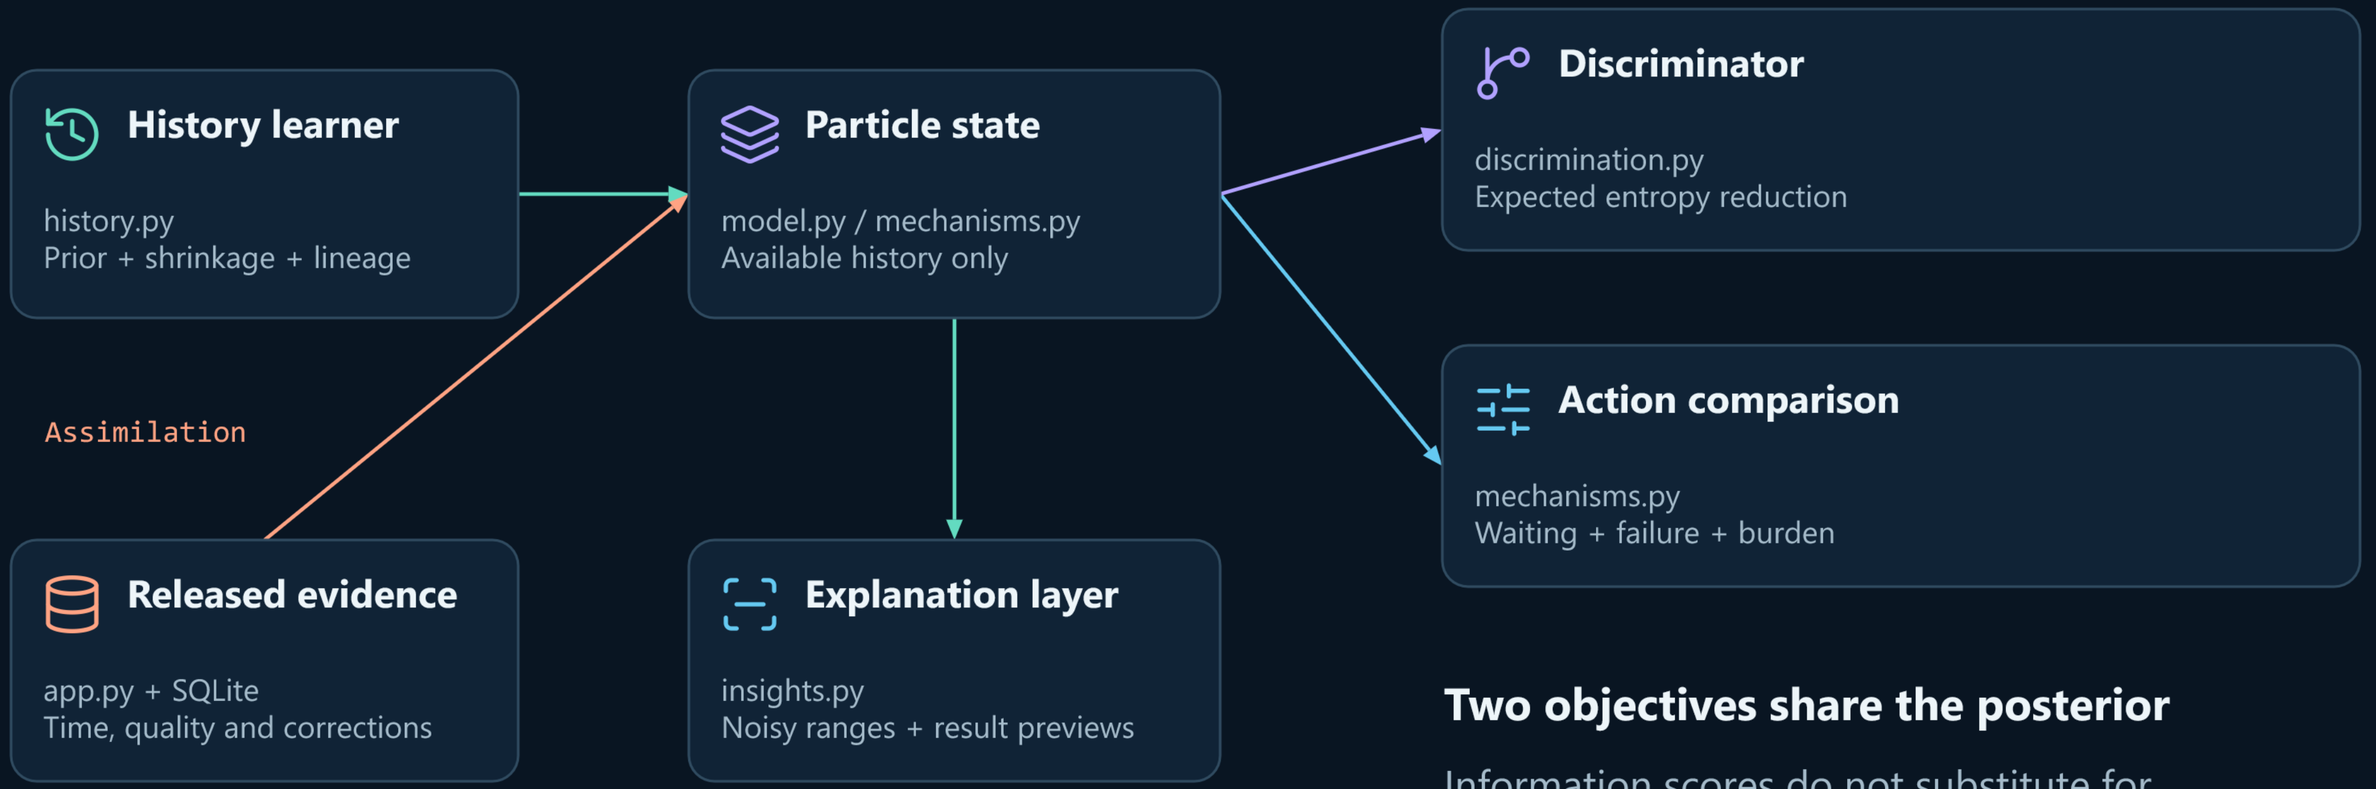


Two objectives share the posterior

Information scores do not substitute for modeled action-loss reduction.

Acquisition request sequence


Planning cannot inspect the fixture result before an explicit acquisition.

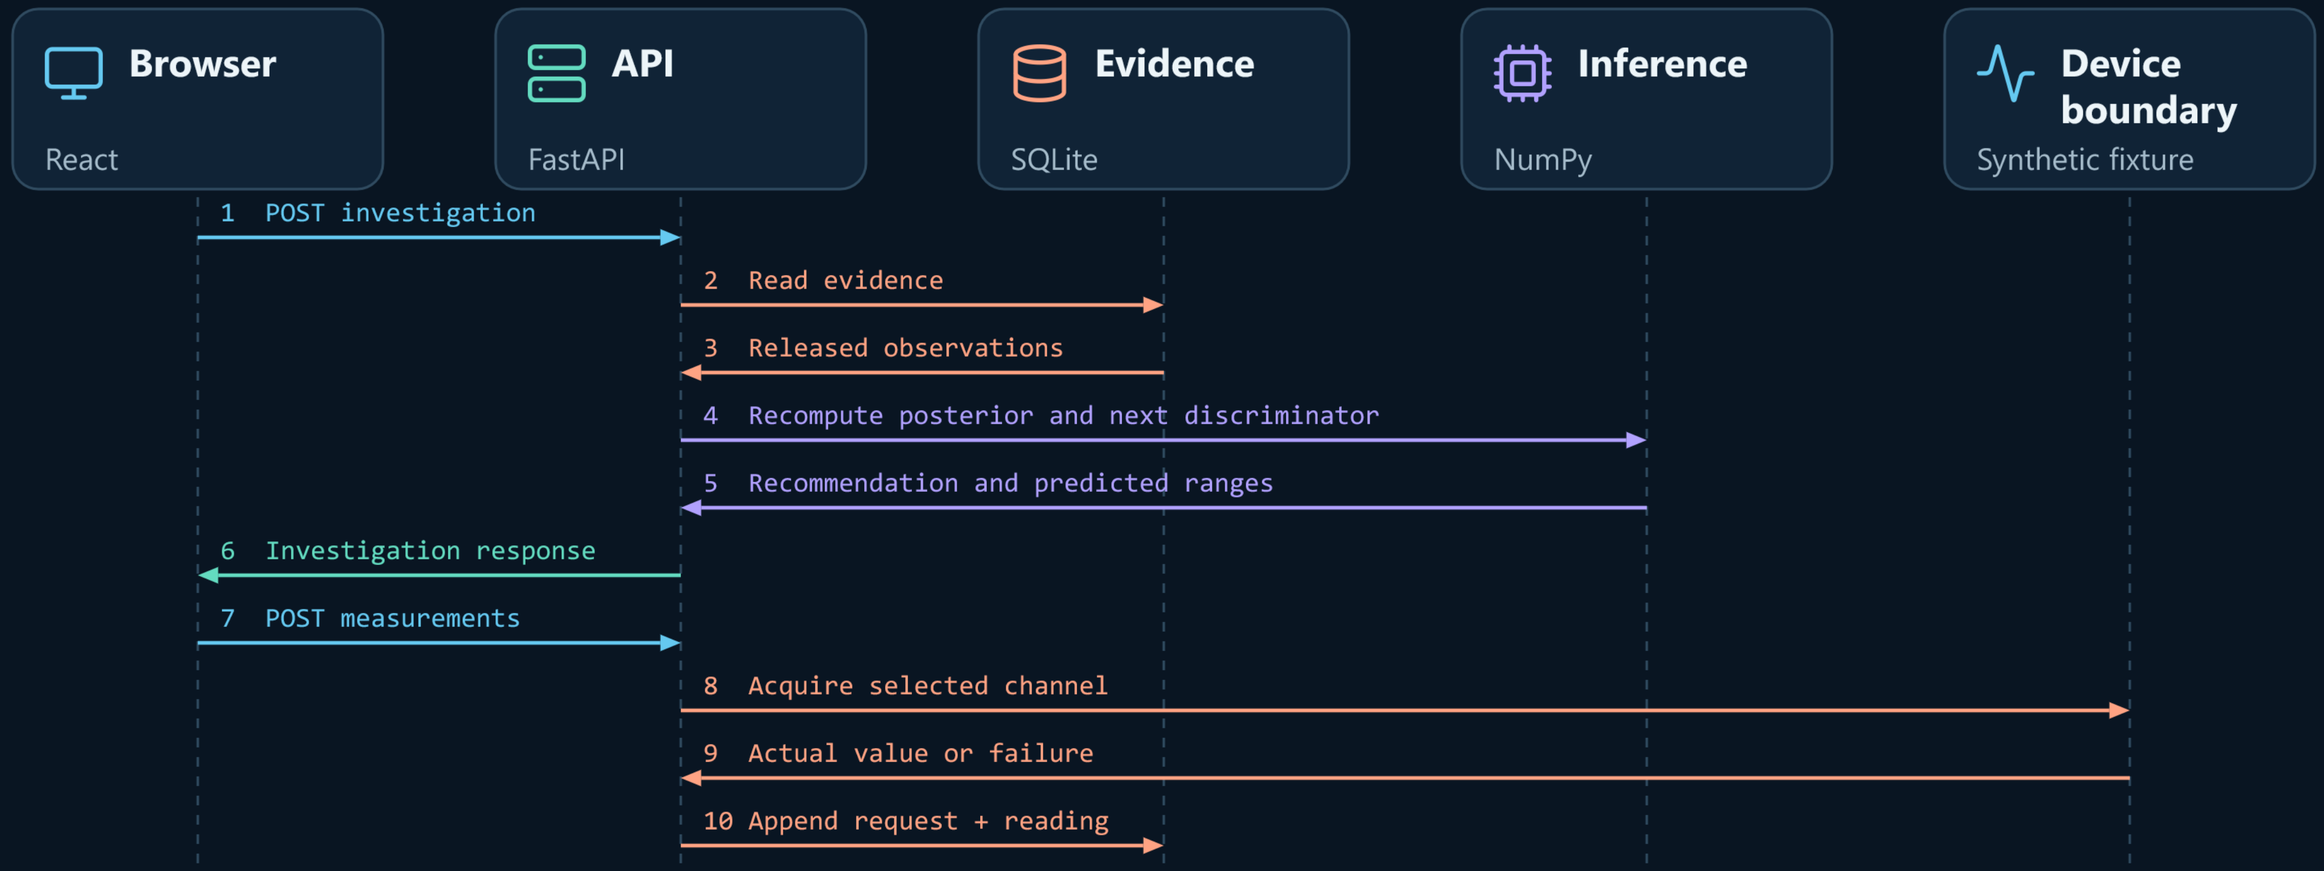

The next investigation reads the appended evidence and recomputes both support and the next question.

Adaptive measurement planning

Concrete synthetic replay at minute 90. Each acquired result changes the next question.

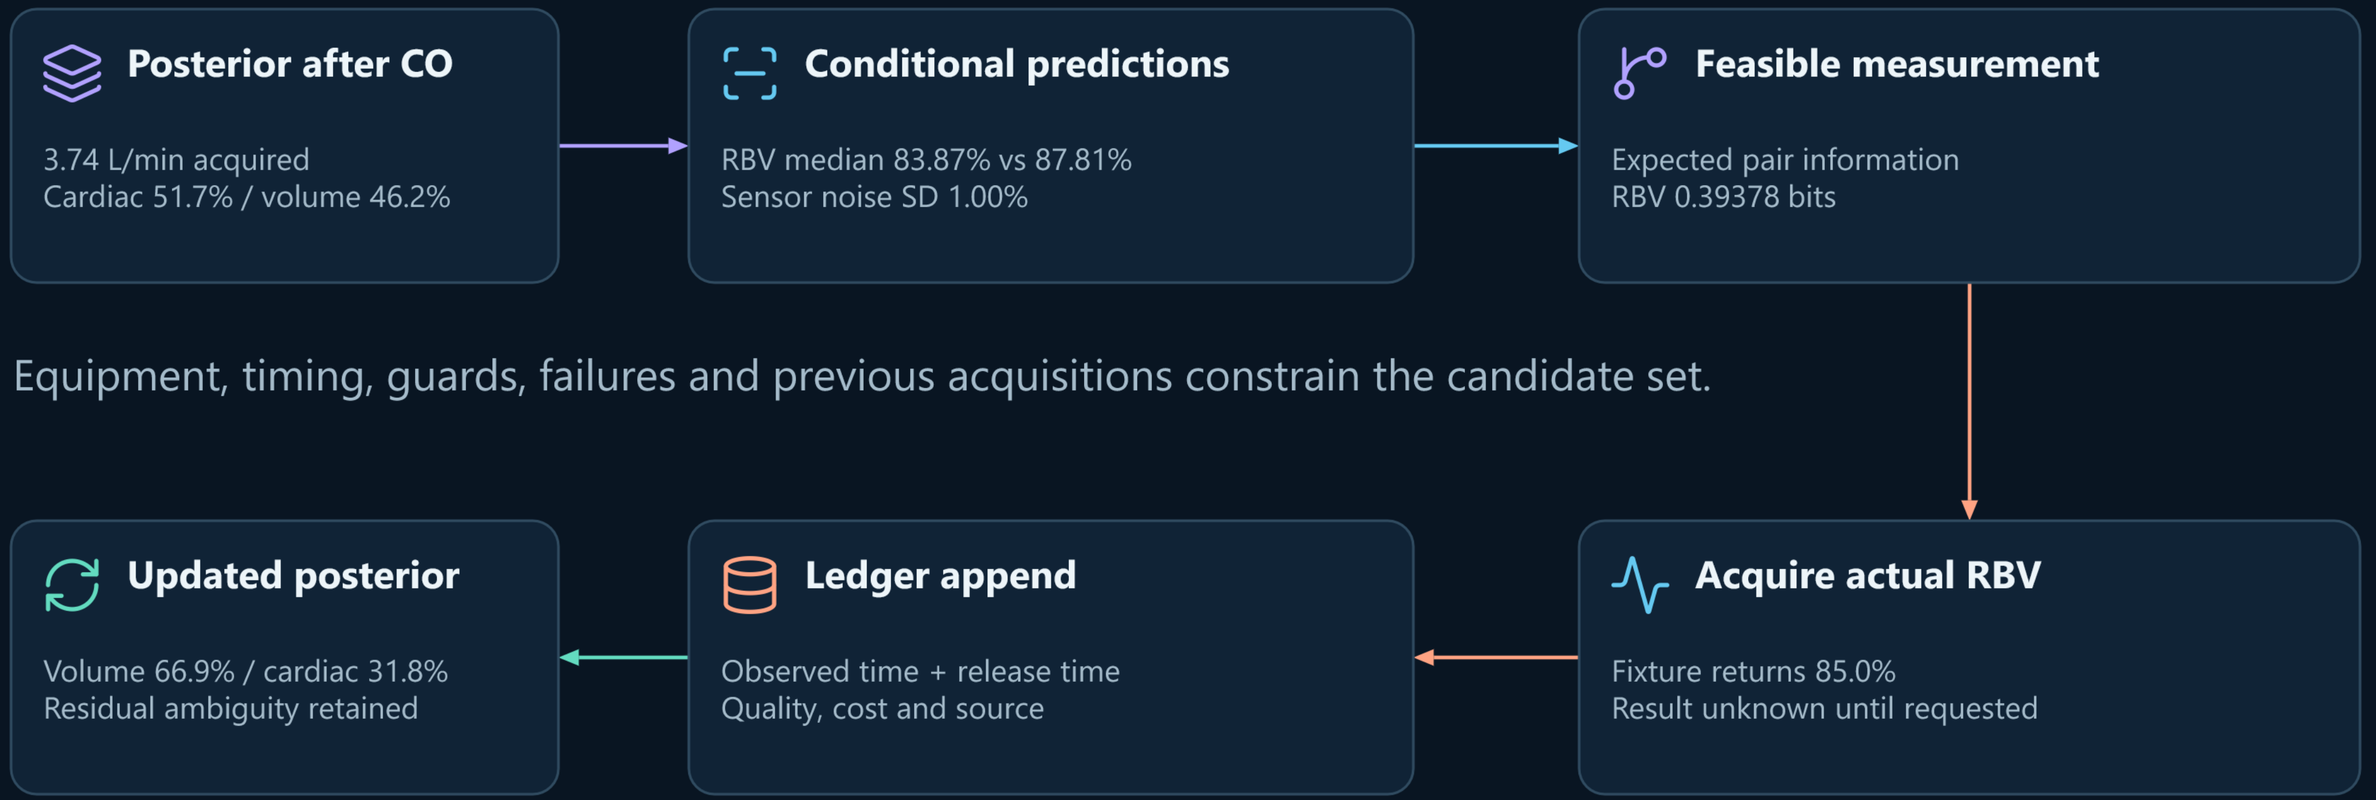


Equipment, timing, guards, failures and previous acquisitions constrain the candidate set.

No useful discriminator is a valid stop state. Repeated readings currently assume independent noise.

Evidence persistence and lineage

Logical relationships in SQLite. Correction appends preserve earlier replay cutoffs.

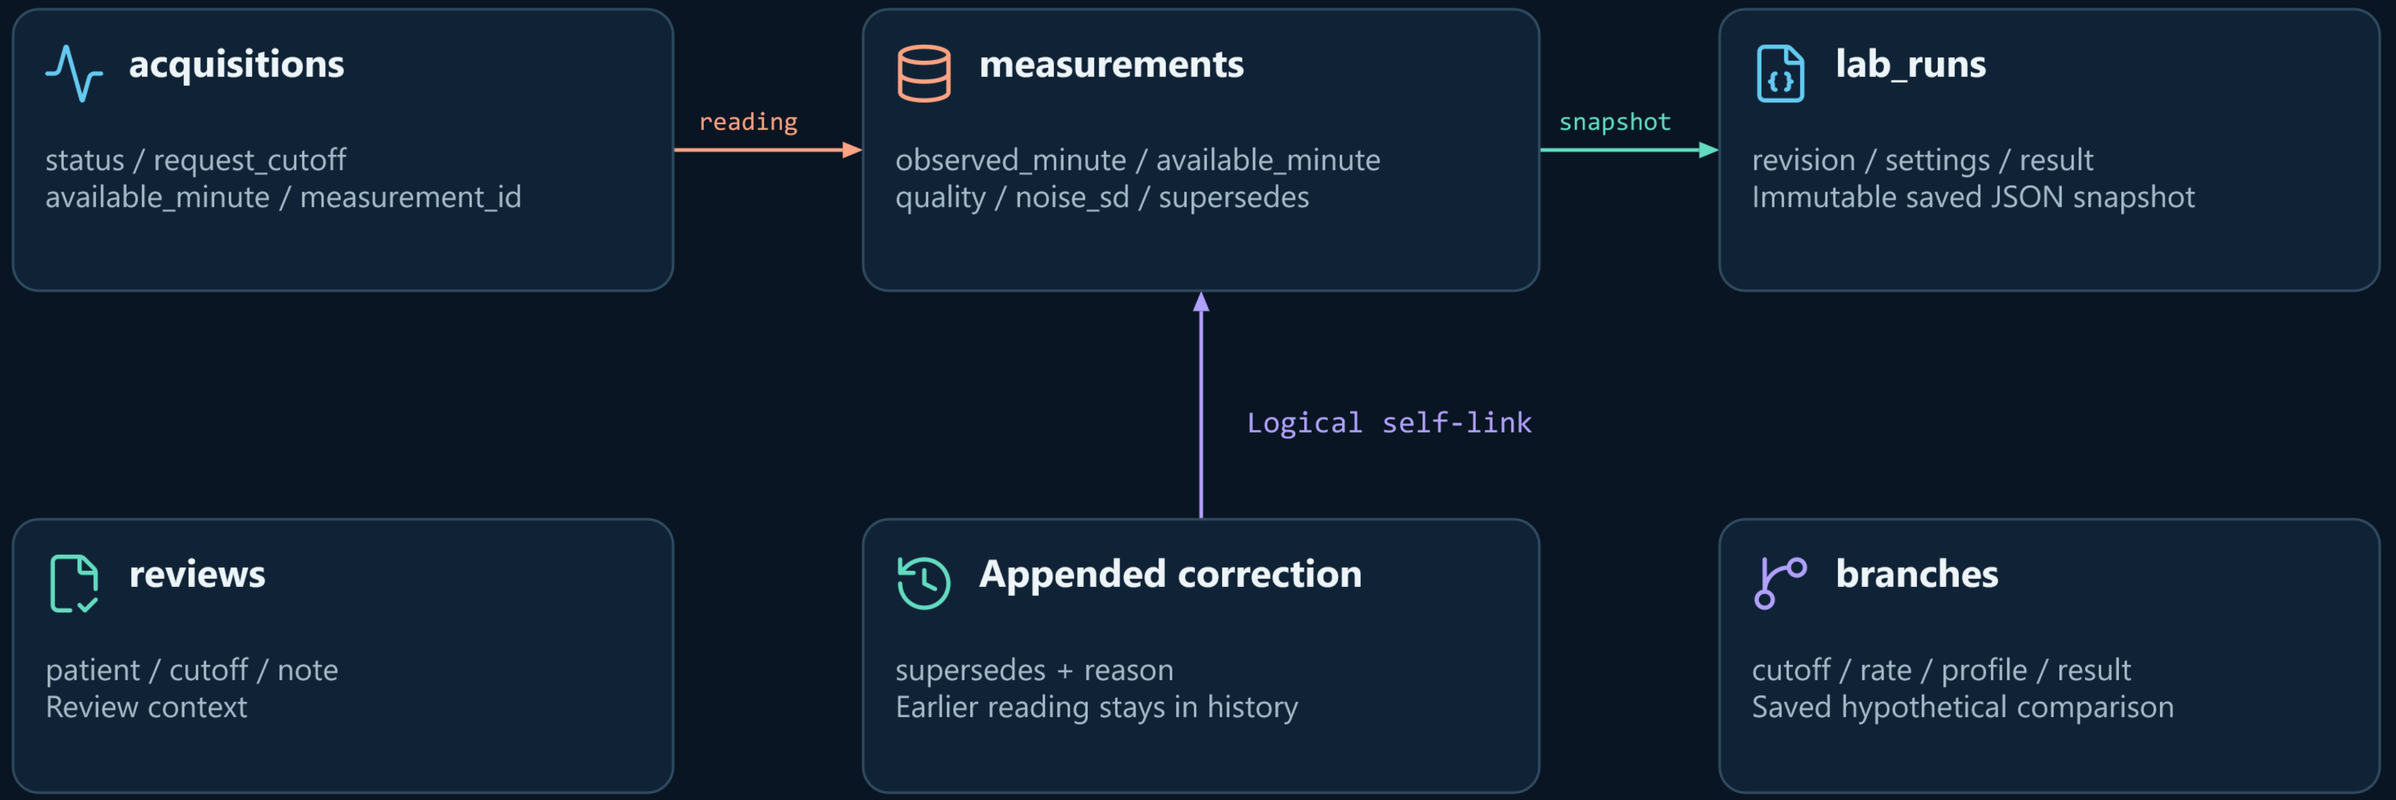

Quality excludes artifacts from inference. Availability gates replay. Saved revisions retain their evidence.

Evaluation boundaries

Three different evidence questions retain separate data, endpoints and claims.

OBSERVED HEMOBP BENCHMARK

Versioned public tables

HEMOBP v3 / CC BY 4.0
Clock alignment assumption

Audited cohort

Elapsed checks / canonical units
Preceding-session inputs only

Patient-disjoint splits

Fit 563 / calibration 141 / test 176
MAE, calibration and workload

INDEPENDENT SYNTHETIC POLICY STUDY

192 cases / 768 policy records

Separate scoring futures and one-acquisition budget.
Decision value does not outperform fixed cuff overall.

CURRENT SEQUENTIAL SELECTOR

Software checks + real UI replay

Multi-acquisition effectiveness remains unevaluated.
A future study needs predeclared correlated noise.