ICML Rebuttal

Submission Number: 17742

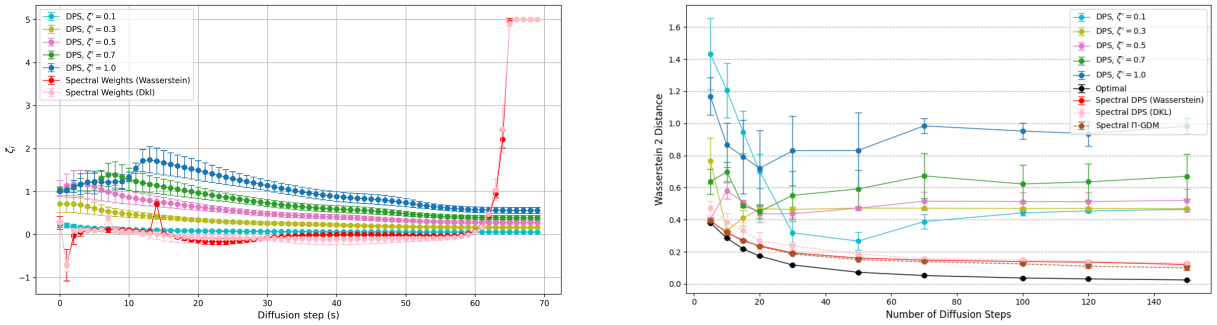

(a) Spectral weights compared to the DPS heuristic for 70 diffusion steps.

(b) Wasserstein-2 distance across diffusion steps.

Figure 1: **Comparison of spectral recommendations derived from KL divergence (pink) and Wasserstein-2 (red) optimization.** The results correspond to the setting described in Section 6.1.

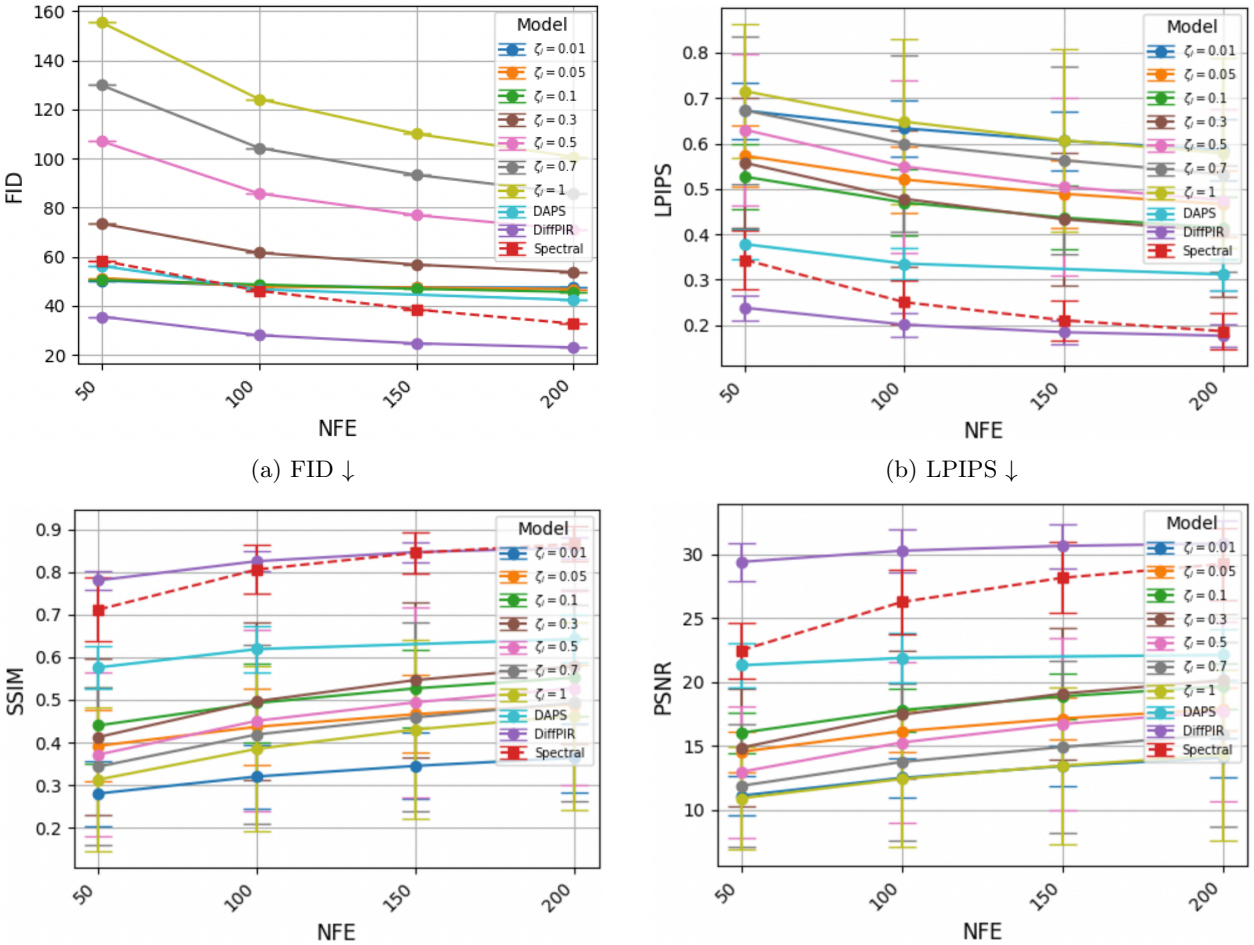

(a) FID ↓

(b) LPIPS ↓

(c) SSIM ↑

(d) PSNR ↑

Figure 2: **Random inpainting degradation.** Comparison of the DPS heuristic, DPS spectral recommendations, DAPS, and DiffPIR on random inpainting with $p = 0.7$ and additive Gaussian noise $\sigma_y = 0.1$, evaluated across the number of function evaluations (NFE) on the FFHQ dataset.

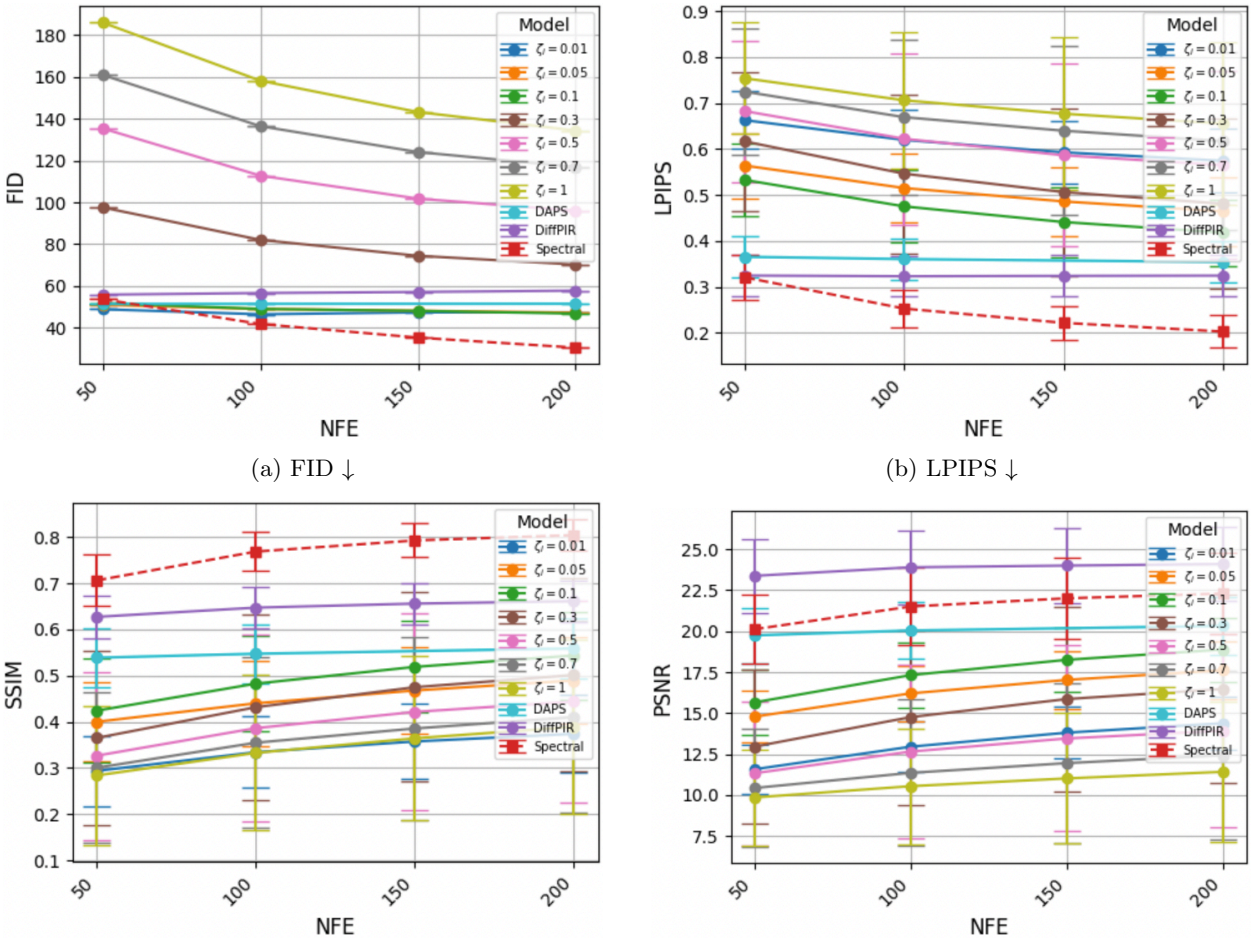

(a) FID ↓

(b) LPIPS ↓

(c) SSIM ↑

(d) PSNR ↑

Figure 3: **Box inpainting degradation.** Comparison of the DPS heuristic, DPS spectral recommendations, DAPS, and DiffPIR using box inpainting with a 128×128 mask and additive Gaussian noise $\sigma_y = 0.1$, evaluated across the number of function evaluations (NFE) on the FFHQ dataset.

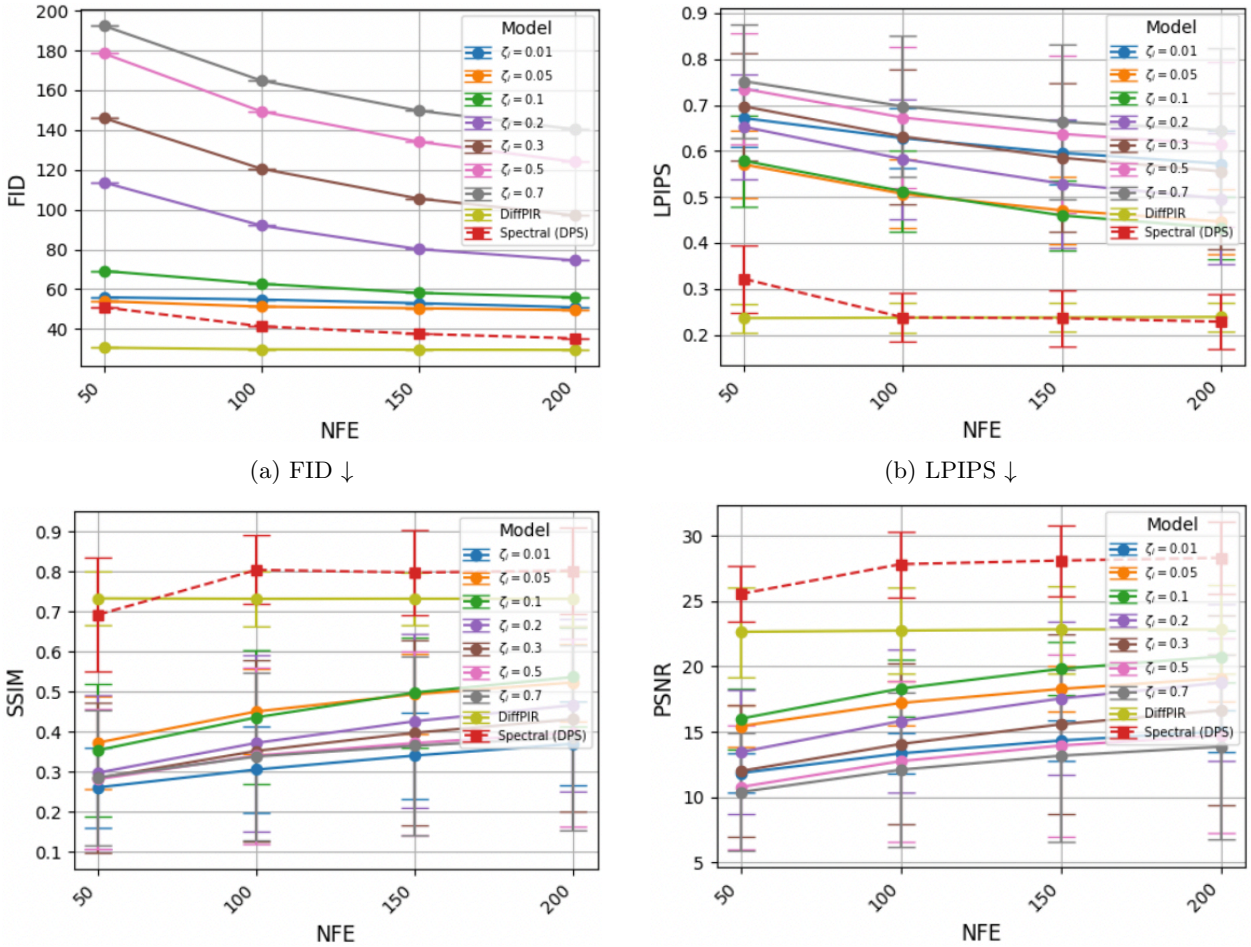

(a) FID ↓

(b) LPIPS ↓

(c) SSIM ↑

(d) PSNR ↑

Figure 4: **LPF degradation.** Comparison of the DPS heuristic, DPS spectral recommendations, and DiffPIR on LPF with parameter $\mathcal{V} = 0.1$ and additive Gaussian noise $\sigma_y = 0.1$ (Section 6.2 setting), evaluated across the number of function evaluations (NFE) on the FFHQ dataset.