


1. Clean compilation

Compiled with `gcc -o countnames countnames.c -Wall -Werror`; exit status 0.

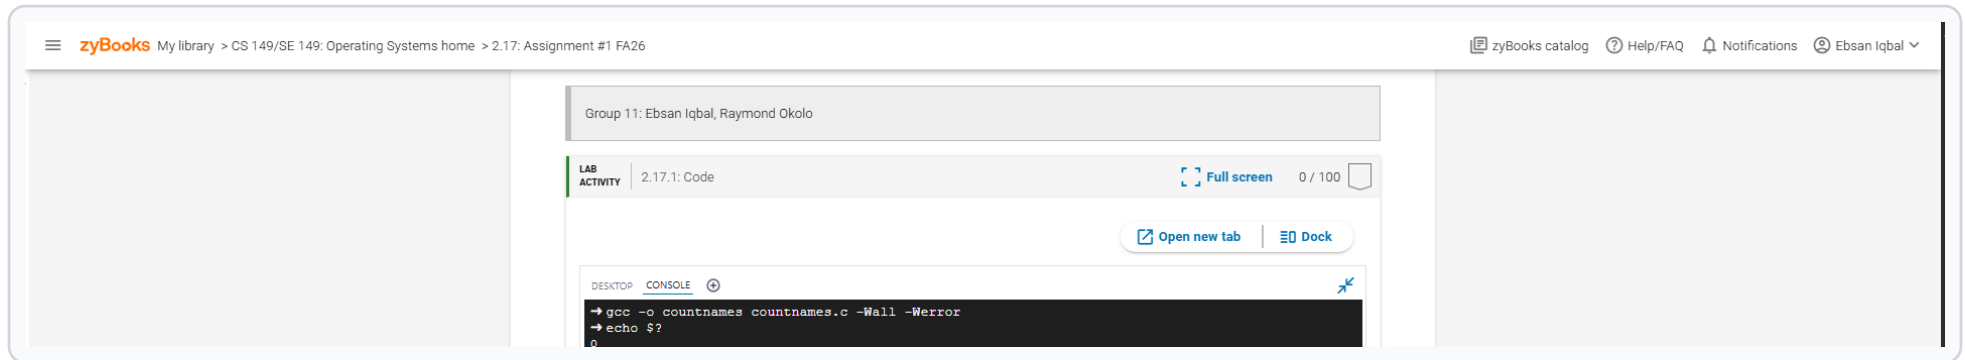

2. Provided test: names.txt

Verifies duplicate counting, multi-word names, and empty-line warnings.

```
→ ./countnames test/names.txt
Warning - Line 2 is empty.
Warning - Line 5 is empty.
Nicky: 1
Dave Joe: 2
Yuan Cheng Chang: 3
John Smith: 1
→
```

3. Provided tests: names1.txt and names2.txt

Verifies repeated names, distinct names, and empty-line handling.

```
→ ./countnames test/names1.txt
Warning - Line 3 is empty.
Tom Wu: 3
→ ./countnames test/names2.txt
Jenn Xu: 2
Tom Wu: 1
→
```

4. Provided test: namesB.txt

Verifies duplicate counting, multi-word names, and empty-line warnings.

```
→ ./countnames test/namesB.txt
Warning - Line 2 is empty.
Warning - Line 5 is empty.
Nicky: 1
Dave Joe: 2
Yuan Cheng Chang: 3
John Smith: 1
→
```

5. Large provided tests

Large-input tests complete successfully with exit status 0; expected empty-line warnings are shown.

```
→ ./countnames test/names_long.txt > /dev/null
echo $?
0
→ ./countnames test/names_long_redundant.txt > /dev/null
echo $?
Warning - Line 97 is empty.
0
→ ./countnames test/names_long_redundant1.txt > /dev/null
echo $?
Warning - Line 2 is empty.
Warning - Line 4 is empty.
Warning - Line 6 is empty.
Warning - Line 8 is empty.
0
→ ./countnames test/names_long_redundant2.txt > /dev/null
echo $?
0
→ ./countnames test/names_long_redundant3.txt > /dev/null
echo $?
0
→ █
```

6. Student test 1: duplicate names

Alice, Bob, and Charlie are counted correctly.

```
→ ./countnames test/mytest1.txt
```

```
Alice: 3
```

```
Bob: 2
```

```
Charlie: 1
```

```
→ █
```

7. Student test 2: spaces and case sensitivity

Tom Wu and tom wu are treated as distinct names.

```
→ ./countnames test/mytest2.txt
```

```
Tom Wu: 2
```

```
tom wu: 2
```

```
Mary Jane: 1
```

```
→
```

8. Student test 3: empty vs whitespace-only line

Empty line is warned/ignored; a single-space line is counted as a valid name.

```
→ ./countnames test/mytest3.txt
Warning - Line 2 is empty.
David: 2
Sarah: 1
      : 1
→
```

9. Student test 4: empty file

Completely empty file produces no program output and exits with status 0.

```
→ ./countnames test/mytest4.txt  
echo $?  
0  
→
```

10. stdin, stdout/stderr, and file-open error checks

Confirms pipe input, stream redirection behavior, and exact file-open error with exit status 1.

```
→ cat test/names2.txt | ./countnames
Jenn Xu: 2
Tom Wu: 1
→ ./countnames test/names.txt > /dev/null
Warning - Line 2 is empty.
Warning - Line 5 is empty.
→ ./countnames test/names.txt 2> /dev/null
Nicky: 1
Dave Joe: 2
Yuan Cheng Chang: 3
John Smith: 1
→ ./countnames test/does_not_exist.txt
echo $?
error: cannot open file
1
→
```