
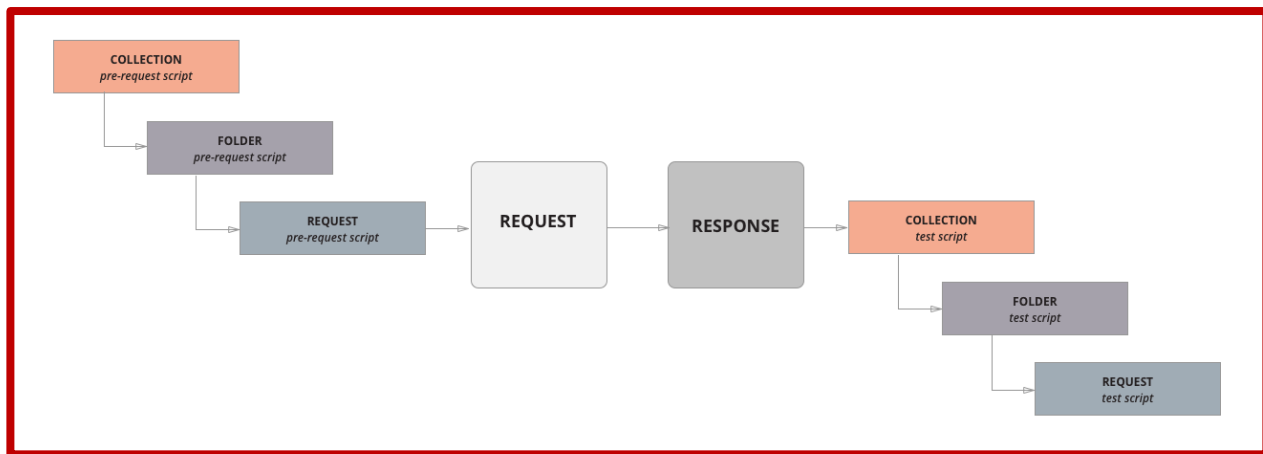


Scripts in Postman

- Pre-request Scripts
- Tests Scripts

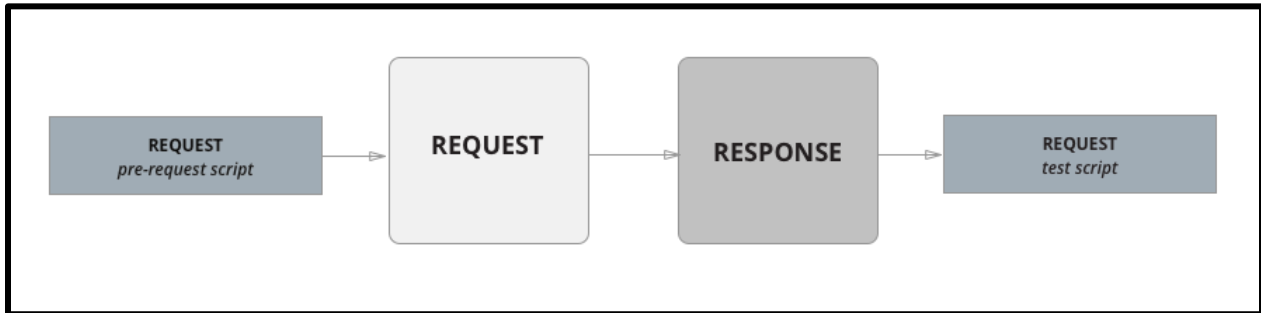

Postman Variables

Can create variables at following levels (scope)

Global

Collection

Environment


Local

Data

Variable types

Default type

Secret type

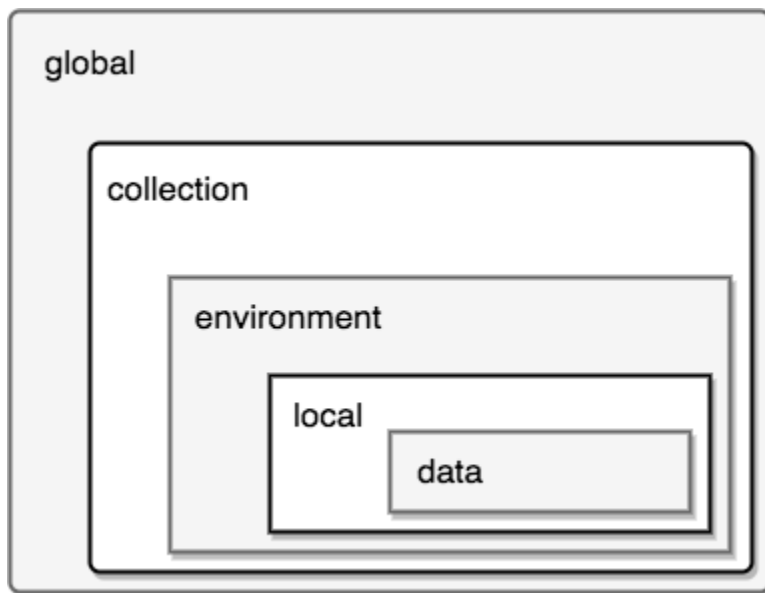

Set/Unset Variables with script

```
//Global
```

```
pm.globals.set("variable", "value");  
pm.globals.unset("variable");
```

```
//Collection
```

```
pm.collectionVariables.set("variable", "value");  
pm.collectionVariables.unset("variable");
```

```
//Environment
```

```
pm.environment.set("variable", "value");  
pm.environment.unset("variable");
```

```
//Local
```

```
pm.variables.set("variable", "value");  
pm.variables.unset("variable");
```

```
//getting values from variables ( in Tests)
```

```
pm.globals.get.get("variable")  
pm.collectionVariables.get("variable")  
pm.environment.get("variable")  
pm.variables.get("variable")
```

```
//Data variables comes from external files like  
CSV/ JSON
```

Usage of variables

```
{{url_global}}/api/users?page=2
```

```
{{url_collection}}/api/users
```

`{{url_env_qa}}/api/users/605`

`{{url_local}}/api/users/605`

Usage of variables in request body

```
{  
  "name": "{{name}}",  
  "job": "{{job}}"  
}
```