


Ø 2.0 CONNECTOR

► TERMINAL

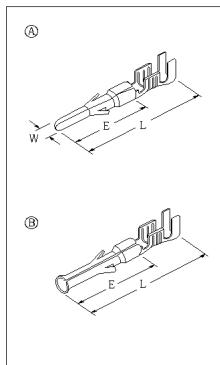

Part No.	Description	Wire Range AWG (mm²)	Material		Dimension (mm)			Type	Q'ty Reel
			Thick.	Finish	L	E	W		
△ ST 750207-3	2.0 Pin Small Wire	24-20 (0.2-0.5)	0.25	Brass Pre-Tin	20.3	12.6	2.0	Ⓐ	4,000
△ ST 750208-3	2.0 Pin Heavy Wire	20-14 (0.75-2.0)	0.25	Brass Pre-Tin	20.3	12.6	2.0		3,000
△ ST 750330-3	2.0 Pin 2 Wire	20+20 20+18 20+16 18+18	0.25	Brass Pre-Tin	20.3	12.6	2.0		3,000
△ ST 730205-3	2.0 Rec. Small Wire	24-20 (0.2-0.5)	0.25	Brass Pre-Tin	20.3	12.6		Ⓑ	4,000
△ ST 730206-3	2.0 Rec. Heavy Wire	20-14 (0.75-2.0)	0.25	Brass Pre-Tin	20.3	12.6			3,000
○ ST 730349-3	2.0 Rec. for Multi	0.75-2.0	0.25	Brass Pre-Tin	20.3	12.6			3,000
△ ST 730329-3	2.0 Rec. 2 Wire	20+20 20+18 20+16 18+18	0.25	Brass Pre-Tin	20.3	12.6			3,000

► HOUSING

Poles	Voltage rating	Current rating	Plug housing for female terminal		Receptacle housing for male terminal	
			△ MG 610008	△ MG 620006	△ MG 620007	△ MG 620009
2	300	15				
3	300	14				
4	300	13				