
How PatchCore finds defects


Few-shot anomaly detection: judge a new image by how far its patches stray from a memory bank of normal ones.

1 Fit · learn what normal looks like, once

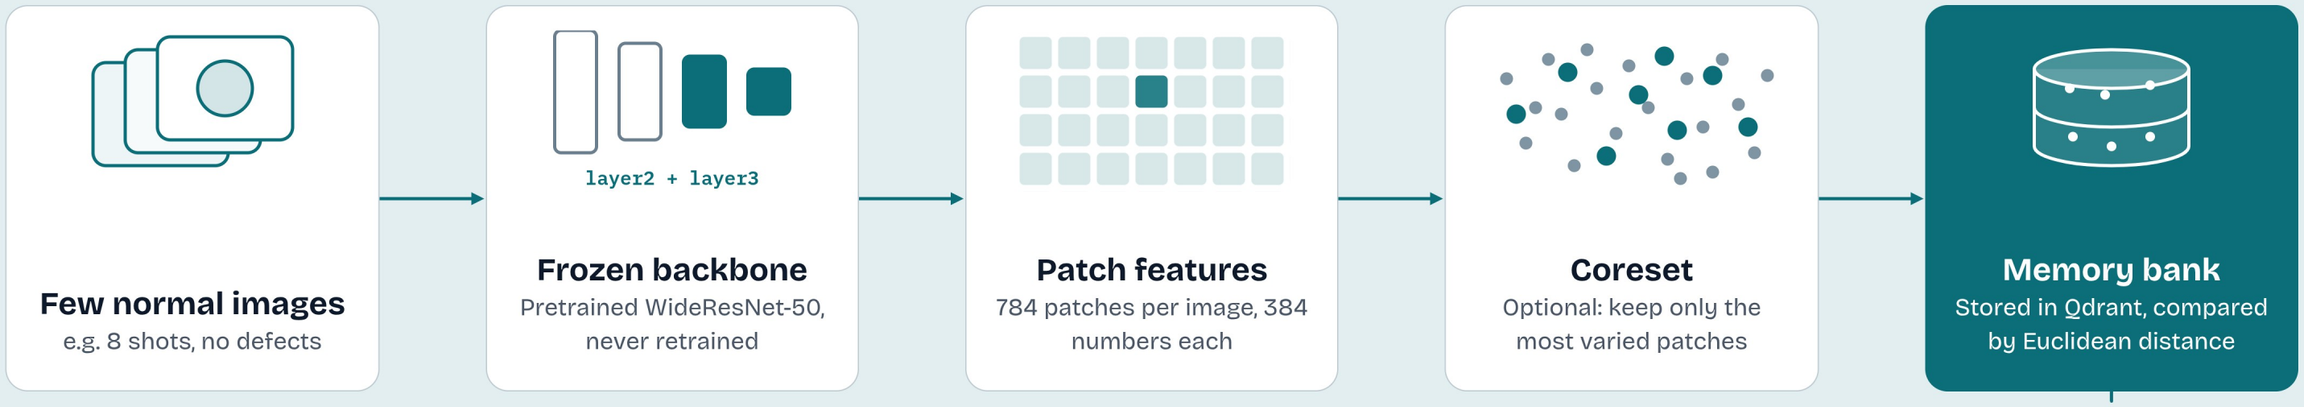

memory bank queried per patch

2 Score · judge every new image

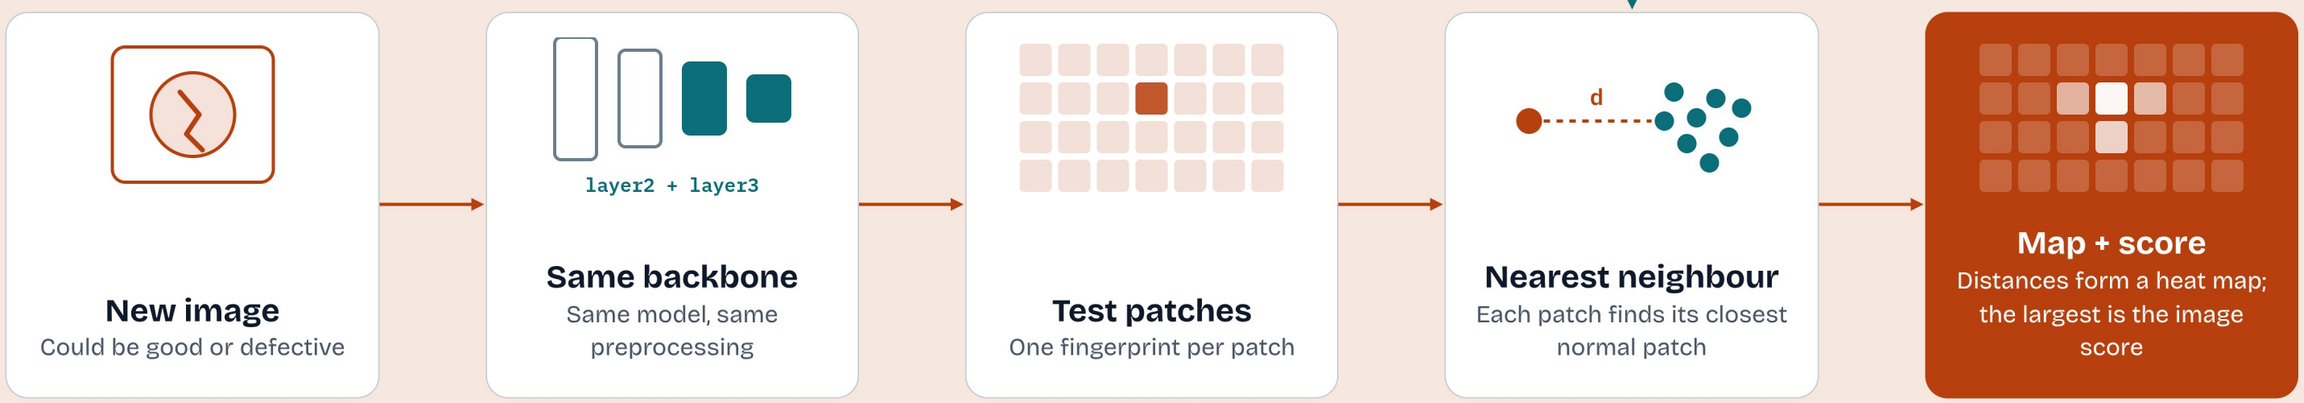

01

No defect examples needed

The bank only holds what normal looks like, so anything unfamiliar stands out.

02

No training on your data

The backbone is pretrained and frozen. Fitting only collects and stores patches.

03

Shows where, not just whether

Every patch has its own distance, so the map points at the defect.