

Experiment 1 — Installation of Hypervisors and initiation of VMs with image file.

Install and configure an open-source hypervisor and create/instantiate a Virtual Machine (VM) using an existing image file. Demonstrate the successful installation and execution of the VM.

Tasks


- Install an open-source hypervisor such as Oracle VirtualBox
- Obtain a suitable VM image/ISO file.
- Create a new VM using the hypervisor.
- Configure the VM's CPU, RAM, storage, and network.
- Attach the image/ISO file to the VM.
- Start and boot the VM.
- Complete the guest OS installation, if required.
- Verify that the VM is running successfully.
- Installing the required build tools and Linux kernel headers using the below commands:

`sudo apt update`


`sudo apt install -y build-essential linux-headers-$(uname -r)`

- Record the configuration and capture relevant screenshots.


Step 1 : Installing and opening Oracle Virtual Machine

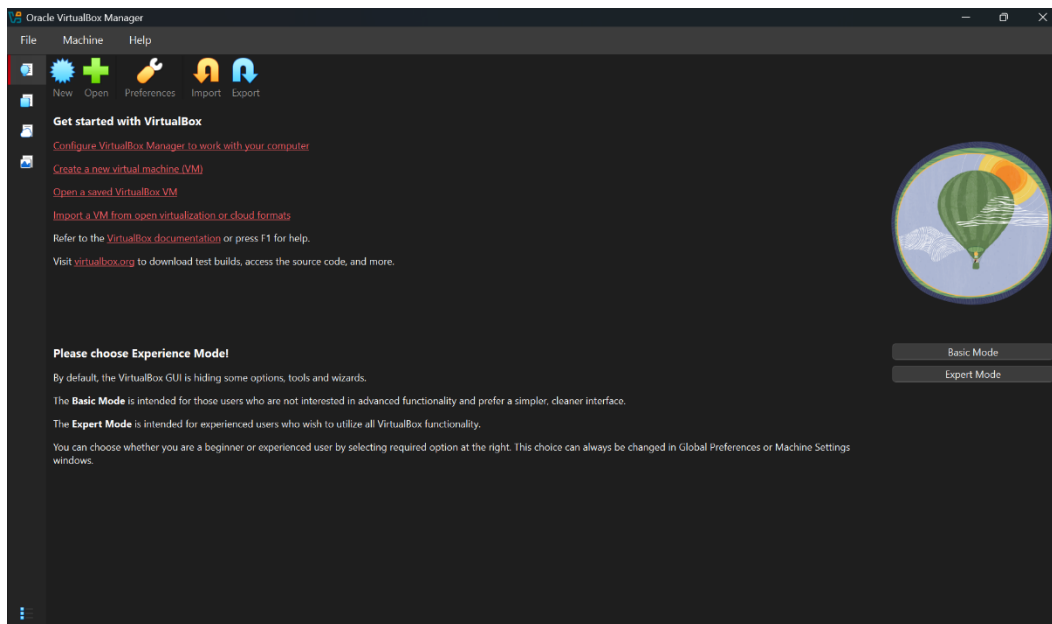


Step 2: Uploading ISO file for OS installation in VM

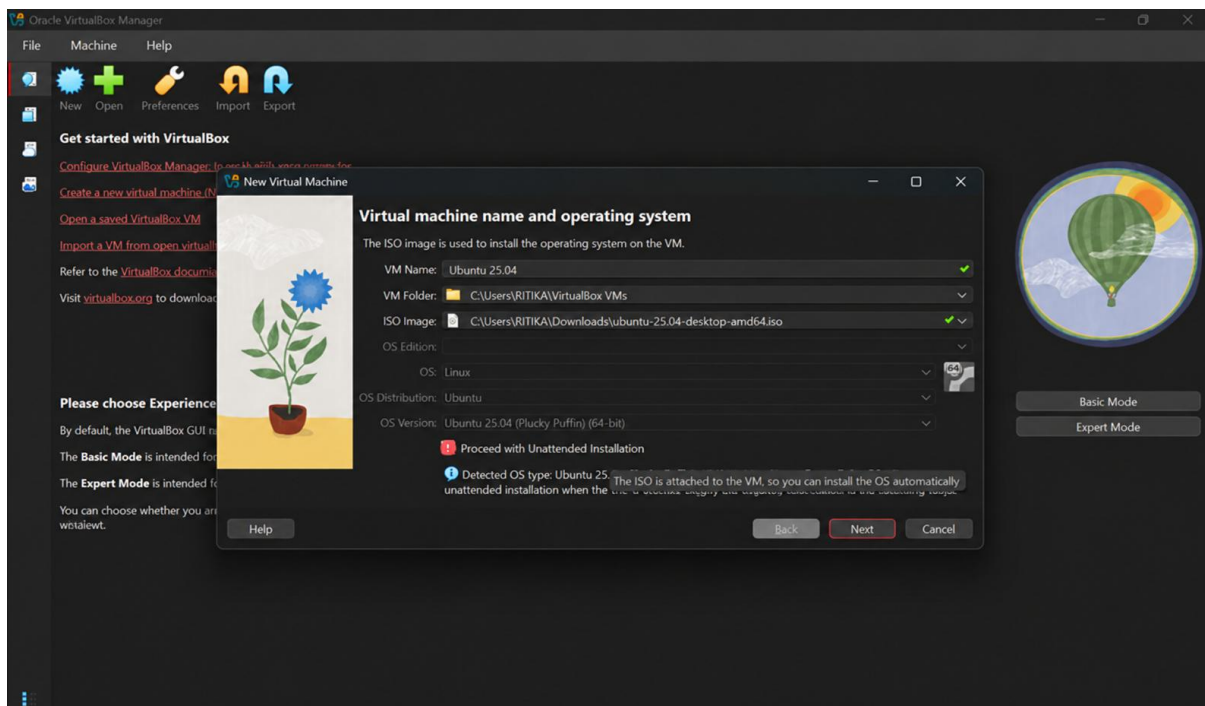


Step 3 : Hardware Setup for VM

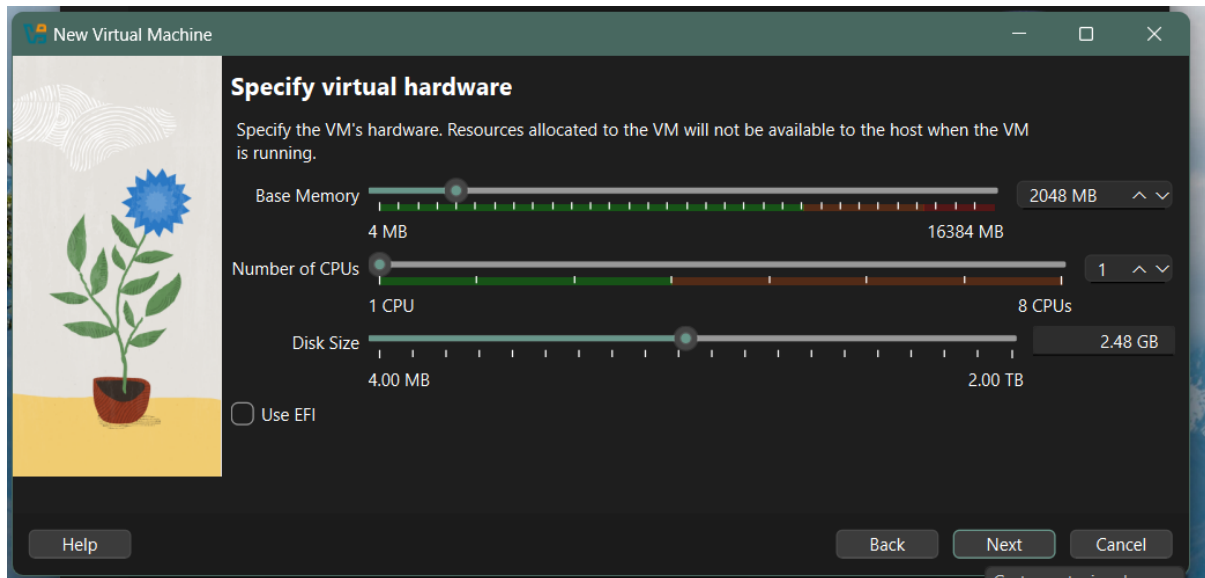


Step 4 : Virtual Machine Configuration

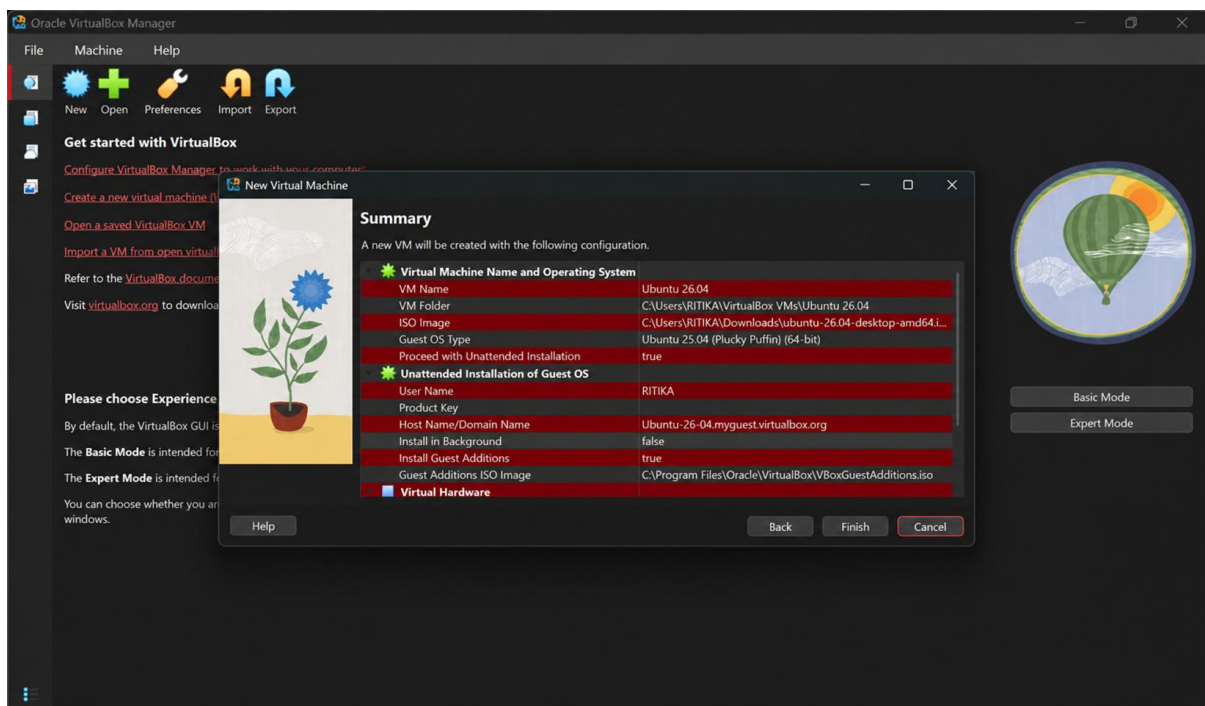


Step 5 : Ubuntu Installation in VM

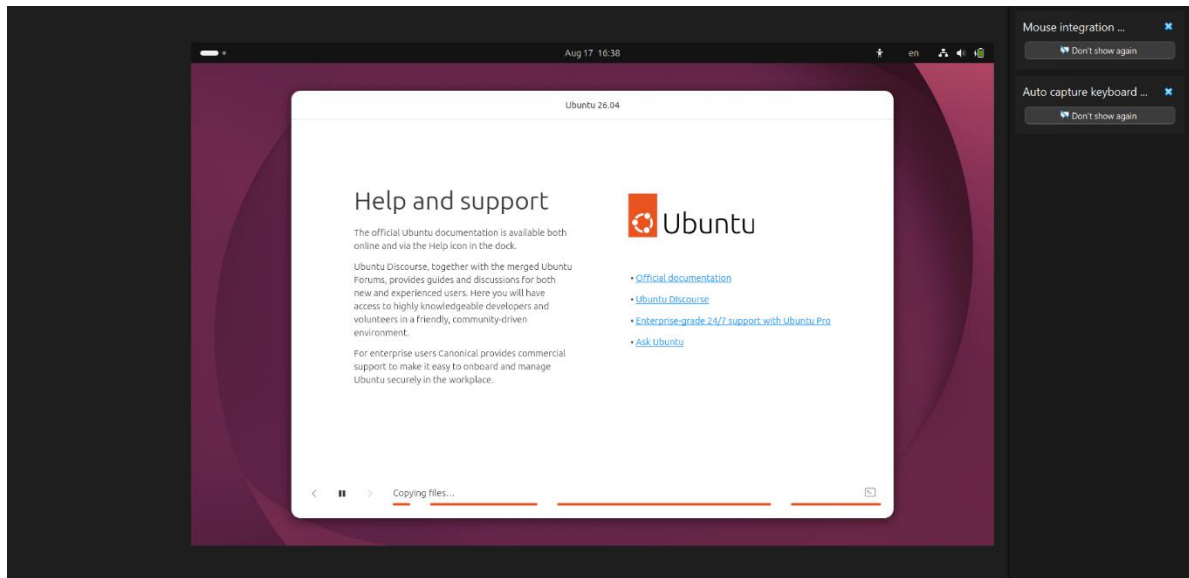

Step 6 : User Login in Ubuntu

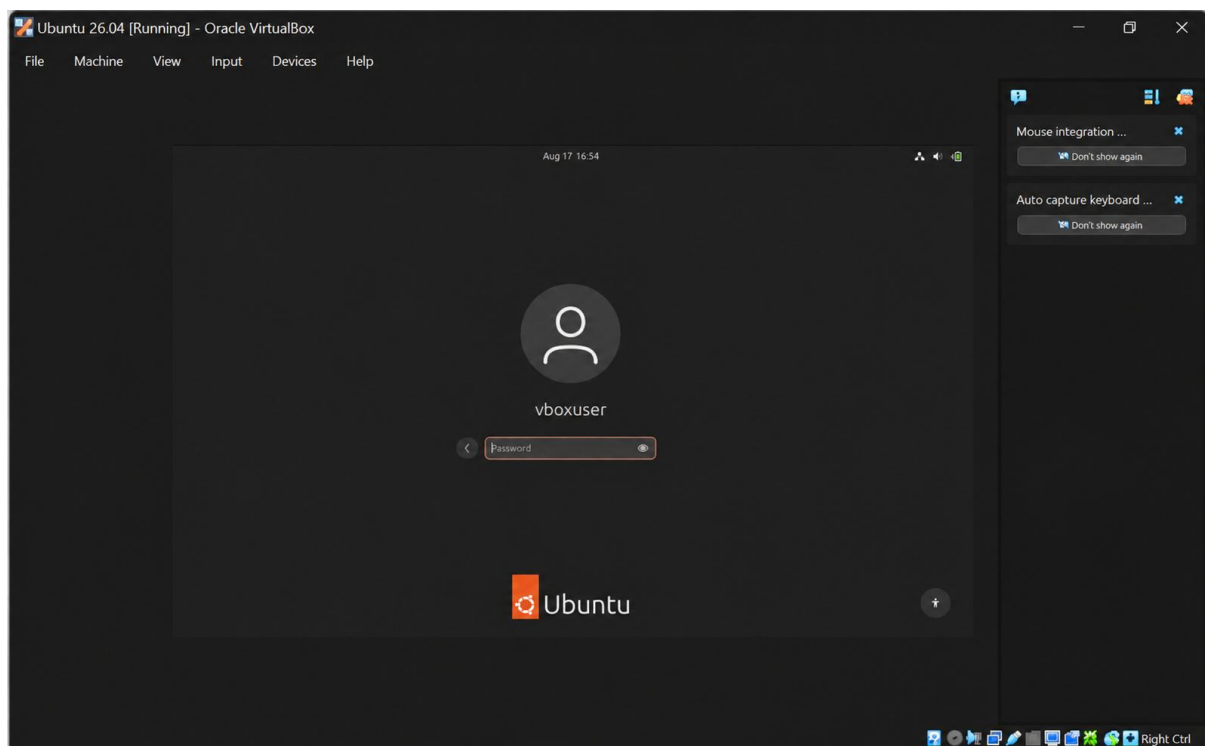

Step 7 : Ubuntu Home Screen

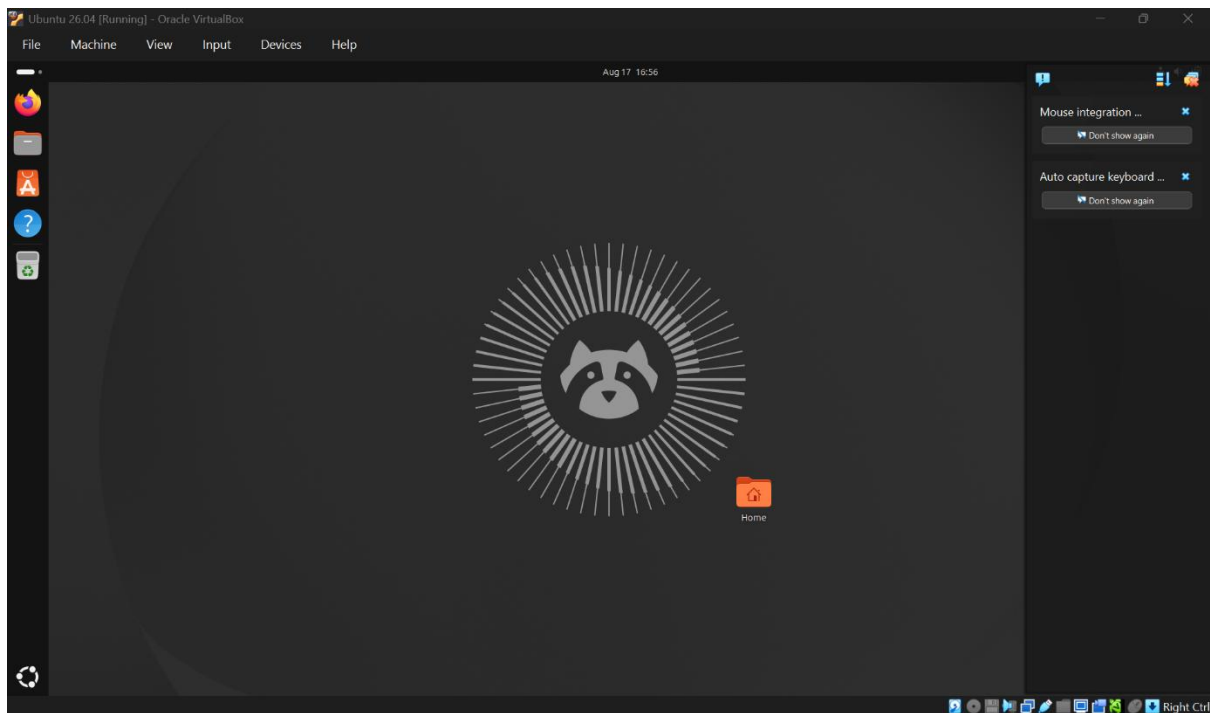

Step 8 : Install build tools & kernel headers using following command

a) `sudo apt update`

b) `sudo apt install -y build-essential linux-headers-$(uname -r)`