

Logging Framework OLAT

Usage:

- $\hbox{\bf -} ThreadLocalUserActivityLoggerInstaller.initUserActivityLogger(HTTPServletRequest)} \\$
- •ThreadLocalUserActivityLoggerInstaller.runWithUserActivityLogger(...)
- addLoggingResourceInfo(ILoggingResourceable)
 - Normal case: XYController.addLoggingResourceable(...)
 - Spez: (No Controller available)
 ThreadLocalUserActivityLogger.addLoggingResourceInfo
- •ThreadLocalUserActivityLogger.log(...)
- •ThreadLocalUserActivityLoggerInstaller.resetUserActivityLogger()



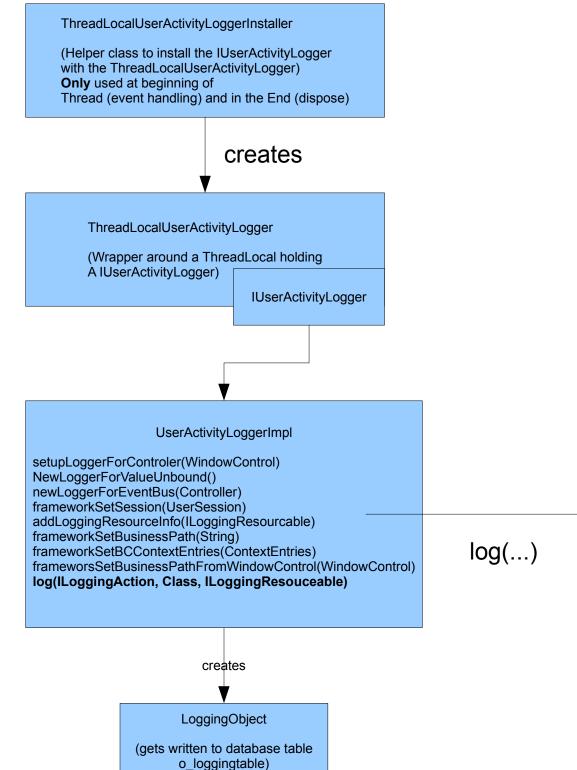

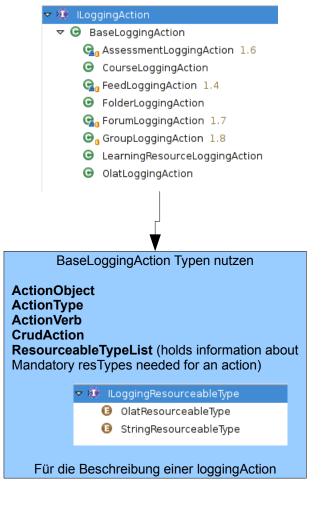

LoggingResourceable Typs provide warpper methods and helpers to create Resourceable Objects in different situations