Camily Vitória Barbosa

Neste PDF estão as evidências de testes realizados no sistema de locadora de veículos, utilizando o Swagger para validação das operações da API. Foram executados testes das funcionalidades de CRUD (Create, Read, Update e Delete) para as principais entidades do sistema, incluindo Cliente, Veículo, Fabricante, Aluguel e Pagamento.

Além das operações básicas, também foram realizados testes de consultas com joins entre tabelas, permitindo verificar o correto funcionamento dos relacionamentos do banco de dados. Esses testes incluem filtros como aluguéis por cliente, veículos por fabricante, pagamentos associados aos clientes e histórico completo de locações.

As imagens a seguir demonstram a execução das requisições HTTP, bem como os retornos das APIs, comprovando o funcionamento correto do sistema e a integridade dos dados.

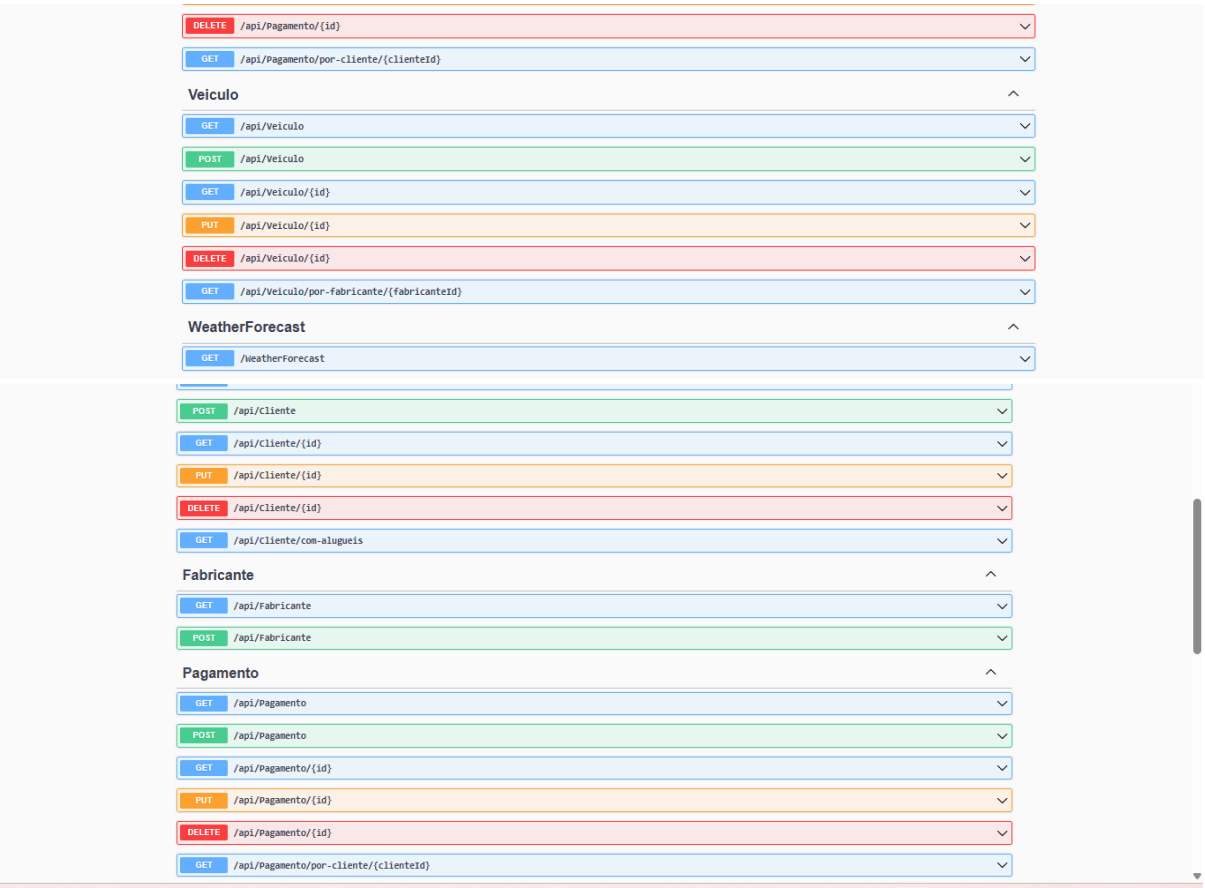

Curl

```
curl -X 'POST' \
  'https://localhost:7221/api/Veiculo' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
  "modelo": "Corolla",
  "ano": 2023,
  "quilometragem": 12000,
  "fabricanteId": 2
}'
```

Request URL

```
https://localhost:7221/api/Veiculo
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |

```
{
  "id": 3,
  "modelo": "Corolla",
  "ano": 2023,
  "quilometragem": 12000,
  "fabricanteId": 2,
  "fabricante": null,
  "alugueis": []
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 20:54:05 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Success | *No links* |

```
curl -X 'POST' \
  'https://localhost:7221/api/Pagamento' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
  "aluguelId": 3,
  "valor": 200,
  "dataPagamento": "2026-04-12T00:00:00",
  "metodo": "Pix"
}'
```

Request URL

```
https://localhost:7221/api/Pagamento
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |

```
{
  "id": 1,
  "aluguelId": 3,
  "aluguel": {
    "id": 3,
    "clienteId": 1,
    "cliente": {
      "id": 1,
      "nome": "Teste",
      "cpf": "12345678900",
      "email": "teste@email.com",
      "alugueis": [
        null
      ]
    },
    "veiculoId": 2,
    "veiculo": {
      "id": 2,
      "modelo": "Civic",
      "ano": 2022,
      "quilometragem": 15000,
      "fabricanteId": 1,
      "fabricante": null,
      "alugueis": [
        null
      ]
    },
    "dataInicio": "2026-04-12T00:00:00",
    "dataFim": "2026-04-15T00:00:00",
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:05:46 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | | *No links* |

Curl

```
curl -X 'POST' \
  'https://localhost:7221/api/Fabricante' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
  "nome": "Toyota"
}'
```

Request URL

```
https://localhost:7221/api/Fabricante
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |

```
{
  "id": 2,
  "nome": "Toyota"
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 20:52:04 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Success | *No links* |

Curl

```
curl -X 'POST' \
  'https://localhost:7221/api/Cliente' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
  "nome": "João Silva",
  "cpf": "12345678900",
  "email": "joao@email.com"
}'
```

Request URL

```
https://localhost:7221/api/Cliente
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |

```
{
  "id": 2,
  "nome": "João Silva",
  "cpf": "12345678900",
  "email": "joao@email.com",
  "alugueis": []
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 20:52:55 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Success | *No links* |

GET /api/Veiculo/{id}

Parameters

Cancel

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 3 |

Execute | Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Veiculo/3' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Veiculo/3
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
{
  "id": 3,
  "modelo": "Corolla",
  "ano": 2023,
  "quilometragem": 12000,
  "fabricanteId": 2,
  "fabricante": {
    "id": 2,
    "nome": "Toyota"
  },
  "alugueis": []
}
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:16:03 GMT
server: Kestrel
```

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Veiculo' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Veiculo
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
[
  {
    "id": 2,
    "modelo": "Civic",
    "ano": 2022,
    "quilometragem": 15000,
    "fabricanteId": 1,
    "fabricante": {
      "id": 1,
      "nome": "Honda"
    },
    "alugueis": []
  },
  {
    "id": 3,
    "modelo": "Corolla",
    "ano": 2023,
    "quilometragem": 12000,
    "fabricanteId": 2,
    "fabricante": {
      "id": 2,
      "nome": "Toyota"
    },
    "alugueis": []
  }
]
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:09:51 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
| --- | --- | --- |
| 200 | Success | *No links* |

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 1 |

Execute | Clear

## Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Pagamento/1' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Pagamento/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | |

Response body


```
{
  "id": 1,
  "aluguelId": 3,
  "aluguel": {
    "id": 3,
    "clienteId": 1,
    "cliente": {
      "id": 1,
      "nome": "Teste",
      "cpf": "12345678900",
      "email": "teste@email.com",
      "alugueis": [
        null
      ]
    },
    "veiculoId": 2,
    "veiculo": {
      "id": 2,
      "modelo": "Civic",
      "ano": 2022,
      "quilometragem": 15000,
      "fabricanteId": 1,
      "fabricante": null,
      "alugueis": [
        null
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:15:18 GMT
server: Kestrel
```

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Pagamento' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Pagamento
```

Server response

| Code | Details |
| --- | --- |
| 200 | |

Response body


```
[
  {
    "id": 1,
    "aluguelId": 3,
    "aluguel": {
      "id": 3,
      "clienteId": 1,
      "cliente": {
        "id": 1,
        "nome": "Teste",
        "cpf": "12345678900",
        "email": "teste@email.com",
        "alugueis": [
          null
        ]
      },
      "veiculoId": 2,
      "veiculo": {
        "id": 2,
        "modelo": "Civic",
        "ano": 2022,
        "quilometragem": 15000,
        "fabricanteId": 1,
        "fabricante": null,
        "alugueis": [
          null
        ]
      },
      "dataInicio": "2026-04-12T00:00:00",
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:09:18 GMT
server: Kestrel
```

Responses

GET /api/Fabricante/{id}

Parameters

Cancel

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 1 |

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Fabricante/1' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Fabricante/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body<br>`{ "id": 1, "nome": "Honda" }`<br>Download<br>Response headers<br>`content-type: application/json; charset=utf-8`<br>`date: Sun,12 Apr 2026 21:14:43 GMT`<br>`server: Kestrel` |

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Fabricante' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Fabricante
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body<br>`[ { "id": 1, "nome": "Honda" }, { "id": 2, "nome": "Toyota" } ]`<br>Download<br>Response headers<br>`content-type: application/json; charset=utf-8`<br>`date: Sun,12 Apr 2026 21:08:51 GMT`<br>`server: Kestrel` |

Responses

| Code | Description | Links |
| --- | --- | --- |
| 200 | Success | *No links* |

GET /api/Aluguel/por-cliente/{clienteId}

Parameters

Cancel

| Name | Description |
| --- | --- |
| clienteId * required<br>integer($int32)<br>(path) | 1 |

Execute | Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Aluguel/por-cliente/1' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Aluguel/por-cliente/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
[
  {
    "id": 3,
    "clienteId": 1,
    "cliente": {
      "id": 1,
      "nome": "Teste",
      "cpf": "12345678900",
      "email": "teste@email.com",
      "alugueis": [
        null
      ]
    },
    "veiculoId": 2,
    "veiculo": {
      "id": 2,
      "modelo": "Civic",
      "ano": 2022,
      "quilometragem": 15000,
      "fabricanteId": 1,
      "fabricante": null,
      "alugueis": [
        null
      ]
    }
```


Download

GET /api/Cliente/{id}

Parameters

Cancel

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 1 |

Execute | Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Cliente/1' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Cliente/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
{
  "id": 1,
  "nome": "Teste",
  "cpf": "12345678900",
  "email": "teste@email.com",
  "alugueis": []
}
```


Download

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7221/api/Cliente' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Cliente
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |


```
[
  {
    "id": 1,
    "nome": "Teste",
    "cpf": "12345678900",
    "email": "teste@email.com",
    "alugueis": []
  },
  {
    "id": 2,
    "nome": "João Silva",
    "cpf": "12345678900",
    "email": "joao@email.com",
    "alugueis": []
  }
]
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:08:21 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Success | *No links* |

```
curl -X 'GET' \
  'https://localhost:7221/api/Aluguel' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7221/api/Aluguel
```

Server response

| Code | Details |
|---|---|
| 200 | Response body |


```
[
  {
    "id": 3,
    "clienteId": 1,
    "cliente": {
      "id": 1,
      "nome": "Teste",
      "cpf": "12345678900",
      "email": "teste@email.com",
      "alugueis": [
        null
      ]
    },
    "veiculoId": 2,
    "veiculo": {
      "id": 2,
      "modelo": "Civic",
      "ano": 2023,
      "quilometragem": 15000,
      "fabricanteId": 1,
      "fabricante": {
        "id": 1,
        "nome": "Honda"
      },
      "alugueis": [
        null
      ]
    },
    "dataInicio": "2026-04-12T00:00:00",
```


Download

Response headers

```
content-type: application/json; charset=utf-8
date: Sun,12 Apr 2026 21:07:46 GMT
server: Kestrel
```

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Success | *No links* |

DELETE /api/Fabricante/{id}

Parameters

Cancel

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 2 |

Execute Clear

Responses

Curl

```
curl -X 'DELETE' \
  'https://localhost:7221/api/Fabricante/2' \
  -H 'accept: */*'
```

Request URL

https://localhost:7221/api/Fabricante/2

Server response

| Code | Details |
| --- | --- |
| 200 | Response headers<br>content-length: 0<br>date: Sun,12 Apr 2026 21:21:52 GMT<br>server: Kestrel |

Responses

| Code | Description | Links |
| --- | --- | --- |

DELETE /api/Cliente/{id}

Parameters

Cancel

| Name | Description |
| --- | --- |
| id * required<br>integer($int32)<br>(path) | 1 |

Execute Clear

Responses

Curl

```
curl -X 'DELETE' \
  'https://localhost:7221/api/Cliente/1' \
  -H 'accept: */*'
```

Request URL

https://localhost:7221/api/Cliente/1

Server response

| Code | Details |
| --- | --- |
| 200 | Response body<br>Cliente removido com sucesso<br>Download<br>Response headers<br>content-type: text/plain; charset=utf-8<br>date: Sun,12 Apr 2026 21:20:33 GMT<br>server: Kestrel |

Responses

| Code | Description | Links |
| --- | --- | --- |

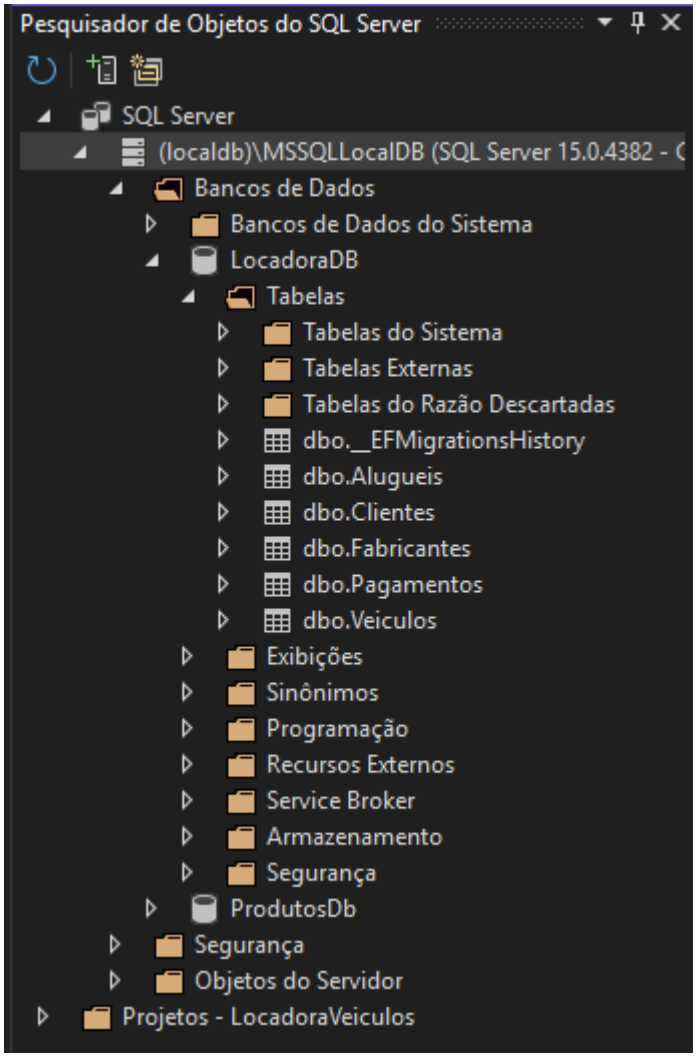


```
public class Aluguel
{
    4 referências
    public int Id { get; set; }

    6 referências
    public int ClienteId { get; set; }
    11 referências
    public Cliente? Cliente { get; set; }

    3 referências
    public int VeiculoId { get; set; }
    11 referências
    public Veiculo? Veiculo { get; set; }

    2 referências
    public DateTime DataInicio { get; set; }

    2 referências
    public DateTime? DataFim { get; set; }

    3 referências
    public DateTime? DataDevolucao { get; set; }

    2 referências
    public double QuilometragemInicial { get; set; }

    2 referências
    public double? QuilometragemFinal { get; set; }

    3 referências
```