

# Space X Falcon 9 First Stage Landing Prediction

## Lab 2: Data wrangling

Estimated time needed: **60** minutes

In this lab, we will perform some Exploratory Data Analysis (EDA) to find some patterns in the data and determine what would be the label for training supervised models.

In the data set, there are several different cases where the booster did not land successfully. Sometimes a landing was attempted but failed due to an accident; for example, **True Ocean** means the mission outcome was successfully landed to a specific region of the ocean while **False Ocean** means the mission outcome was unsuccessfully landed to a specific region of the ocean. **True RTLS** means the mission outcome was successfully landed to a ground pad **False RTLS** means the mission outcome was unsuccessfully landed to a ground pad. **True ASDS** means the mission outcome was successfully landed on a drone ship **False ASDS** means the mission outcome was unsuccessfully landed on a drone ship.

In this lab we will mainly convert those outcomes into Training Labels with **1** means the booster successfully landed **0** means it was unsuccessful.

Falcon 9 first stage will land successfully



Several examples of an unsuccessful landing are shown here:



## Objectives

Perform exploratory Data Analysis and determine Training Labels

- Exploratory Data Analysis
- Determine Training Labels

---

## Import Libraries and Define Auxiliary Functions

We will import the following libraries.

```
In [2]: # Pandas is a software library written for the Python programming Language for d
import pandas as pd
#NumPy is a library for the Python programming Language, adding support for larg
import numpy as np
```

## Data Analysis

Load Space X dataset, from last section.

```
In [3]: df=pd.read_csv("https://cf-courses-data.s3.us.cloud-object-storage.appdomain.clo
df.head(10)
```

Out[3]:

	FlightNumber	Date	BoosterVersion	PayloadMass	Orbit	LaunchSite	Outcome	Fli
--	--------------	------	----------------	-------------	-------	------------	---------	-----

0	1	2010-06-04	Falcon 9	6104.959412	LEO	CCAFS SLC 40	None None	
1	2	2012-05-22	Falcon 9	525.000000	LEO	CCAFS SLC 40	None None	
2	3	2013-03-01	Falcon 9	677.000000	ISS	CCAFS SLC 40	None None	
3	4	2013-09-29	Falcon 9	500.000000	PO	VAFB SLC 4E	False Ocean	
4	5	2013-12-03	Falcon 9	3170.000000	GTO	CCAFS SLC 40	None None	
5	6	2014-01-06	Falcon 9	3325.000000	GTO	CCAFS SLC 40	None None	
6	7	2014-04-18	Falcon 9	2296.000000	ISS	CCAFS SLC 40	True Ocean	
7	8	2014-07-14	Falcon 9	1316.000000	LEO	CCAFS SLC 40	True Ocean	
8	9	2014-08-05	Falcon 9	4535.000000	GTO	CCAFS SLC 40	None None	
9	10	2014-09-07	Falcon 9	4428.000000	GTO	CCAFS SLC 40	None None	

Identify and calculate the percentage of the missing values in each attribute

In [4]: `df.isnull().sum()/len(df)*100`

Out[4]:

FlightNumber	0.000000
Date	0.000000
BoosterVersion	0.000000
PayloadMass	0.000000
Orbit	0.000000
LaunchSite	0.000000
Outcome	0.000000
Flights	0.000000
GridFins	0.000000
Reused	0.000000
Legs	0.000000
LandingPad	28.888889
Block	0.000000
ReusedCount	0.000000
Serial	0.000000
Longitude	0.000000
Latitude	0.000000

dtype: float64

Identify which columns are numerical and categorical:

In [5]: `df.dtypes`

```
Out[5]: FlightNumber      int64
Date                    object
BoosterVersion          object
PayloadMass             float64
Orbit                   object
LaunchSite              object
Outcome                 object
Flights                 int64
GridFins                bool
Reused                  bool
Legs                    bool
LandingPad              object
Block                   float64
ReusedCount             int64
Serial                  object
Longitude               float64
Latitude                float64
dtype: object
```

## TASK 1: Calculate the number of launches on each site

The data contains several Space X launch facilities: [Cape Canaveral Space Launch Complex 40](#) **VAFB SLC 4E** , Vandenberg Air Force Base Space Launch Complex 4E (**SLC-4E**), Kennedy Space Center Launch Complex 39A **KSC LC 39A** .The location of each Launch is placed in the column `LaunchSite`

Next, let's see the number of launches for each site.

Use the method `value_counts()` on the column `LaunchSite` to determine the number of launches on each site:

```
In [8]: import pandas as pd

# URL to fetch the dataset
url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS

# Load the dataset into a DataFrame
df = pd.read_csv(url)

# Apply value_counts() on LaunchSite column
launch_site_counts = df['LaunchSite'].value_counts()

# Print the number of launches for each site
print("Number of launches for each site:")
print(launch_site_counts)
```

Number of launches for each site:

```
CCAFS SLC 40      55
KSC LC 39A        22
VAFB SLC 4E       13
```

Name: LaunchSite, dtype: int64


Each launch aims to an dedicated orbit, and here are some common orbit types:

- **LEO:** Low Earth orbit (LEO) is an Earth-centred orbit with an altitude of 2,000 km (1,200 mi) or less (approximately one-third of the radius of Earth),[1] or with at least

11.25 periods per day (an orbital period of 128 minutes or less) and an eccentricity less than 0.25.[2] Most of the manmade objects in outer space are in LEO [1].

- **VLEO:** Very Low Earth Orbits (VLEO) can be defined as the orbits with a mean altitude below 450 km. Operating in these orbits can provide a number of benefits to Earth observation spacecraft as the spacecraft operates closer to the observation[2].
- **GTO** A geosynchronous orbit is a high Earth orbit that allows satellites to match Earth's rotation. Located at 22,236 miles (35,786 kilometers) above Earth's equator, this position is a valuable spot for monitoring weather, communications and surveillance. Because the satellite orbits at the same speed that the Earth is turning, the satellite seems to stay in place over a single longitude, though it may drift north to south," NASA wrote on its Earth Observatory website [3] .
- **SSO (or SO):** It is a Sun-synchronous orbit also called a heliosynchronous orbit is a nearly polar orbit around a planet, in which the satellite passes over any given point of the planet's surface at the same local mean solar time [4] .
- **ES-L1** :At the Lagrange points the gravitational forces of the two large bodies cancel out in such a way that a small object placed in orbit there is in equilibrium relative to the center of mass of the large bodies. L1 is one such point between the sun and the earth [5] .
- **HEO** A highly elliptical orbit, is an elliptic orbit with high eccentricity, usually referring to one around Earth [6].
- **ISS** A modular space station (habitable artificial satellite) in low Earth orbit. It is a multinational collaborative project between five participating space agencies: NASA (United States), Roscosmos (Russia), JAXA (Japan), ESA (Europe), and CSA (Canada) [7]
- **MEO** Geocentric orbits ranging in altitude from 2,000 km (1,200 mi) to just below geosynchronous orbit at 35,786 kilometers (22,236 mi). Also known as an intermediate circular orbit. These are "most commonly at 20,200 kilometers (12,600 mi), or 20,650 kilometers (12,830 mi), with an orbital period of 12 hours [8]
- **HEO** Geocentric orbits above the altitude of geosynchronous orbit (35,786 km or 22,236 mi) [9]
- **GEO** It is a circular geosynchronous orbit 35,786 kilometres (22,236 miles) above Earth's equator and following the direction of Earth's rotation [10]
- **PO** It is one type of satellites in which a satellite passes above or nearly above both poles of the body being orbited (usually a planet such as the Earth [11]

some are shown in the following plot:

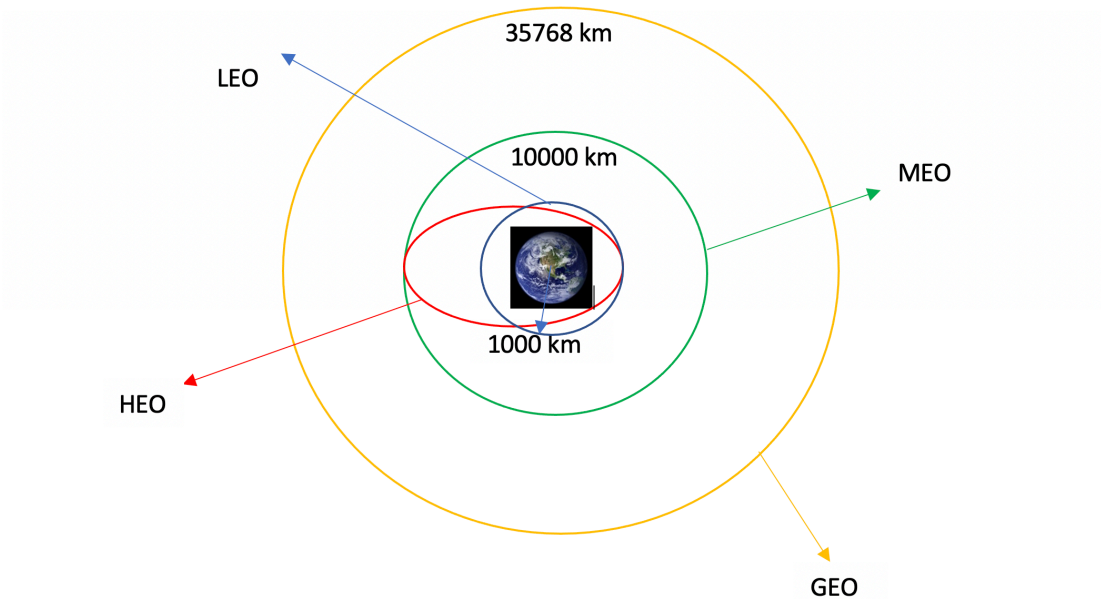

## TASK 2: Calculate the number and occurrence of each orbit

Use the method `.value_counts()` to determine the number and occurrence of each orbit in the column `Orbit`

```
In [10]: import pandas as pd

# URL to fetch the dataset
url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS

# Load the dataset into a DataFrame
data = pd.read_csv(url)

# Apply value_counts() on Orbit column
orbit_counts = data['Orbit'].value_counts()

# Print the number of launches for each orbit
print("Number of launches for each orbit:")
print(orbit_counts)
```

Number of launches for each orbit:

GTO	27
ISS	21
VLEO	14
PO	9
LEO	7
SSO	5
MEO	3
ES-L1	1
HEO	1
SO	1
GEO	1

Name: Orbit, dtype: int64

### TASK 3: Calculate the number and occurrence of mission outcome of the orbits

Use the method `.value_counts()` on the column `Outcome` to determine the number of `landing_outcomes`. Then assign it to a variable `landing_outcomes`.

```
In [11]: # landing_outcomes = values on Outcome column

import pandas as pd

# URL to fetch the dataset
url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS

# Load the dataset into a DataFrame
data = pd.read_csv(url)

# Apply value_counts() on Outcome column
landing_outcomes = data['Outcome'].value_counts()

# Print the number of landing outcomes
print("Number of landing outcomes:")
print(landing_outcomes)
```

```
Number of landing outcomes:
True ASDS      41
None None      19
True RTLS      14
False ASDS      6
True Ocean      5
False Ocean     2
None ASDS       2
False RTLS      1
Name: Outcome, dtype: int64
```

`True Ocean` means the mission outcome was successfully landed to a specific region of the ocean while `False Ocean` means the mission outcome was unsuccessfully landed to a specific region of the ocean. `True RTLS` means the mission outcome was successfully landed to a ground pad `False RTLS` means the mission outcome was unsuccessfully landed to a ground pad. `True ASDS` means the mission outcome was successfully landed to a drone ship `False ASDS` means the mission outcome was unsuccessfully landed to a drone ship. `None ASDS` and `None None` these represent a failure to land.

```
In [15]: for i,outcome in enumerate(landing_outcomes.keys()):
          print(i,outcome)
```

```
0 True ASDS
1 None None
2 True RTLS
3 False ASDS
4 True Ocean
5 False Ocean
6 None ASDS
7 False RTLS
```

We create a set of outcomes where the second stage did not land successfully:

```
In [ ]: bad_outcomes=set(landing_outcomes.keys()[[1,3,5,6,7]])
bad_outcomes
```

## TASK 4: Create a landing outcome label from Outcome column

Using the `Outcome`, create a list where the element is zero if the corresponding row in `Outcome` is in the set `bad_outcome`; otherwise, it's one. Then assign it to the variable `landing_class`:

```
In [12]: # landing_class = 0 if bad_outcome
# landing_class = 1 otherwise

import pandas as pd

# URL to fetch the dataset
url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS

# Load the dataset into a DataFrame
data = pd.read_csv(url)

# Define the set of bad outcomes
bad_outcome = {'failure', 'lost'}

# Create landing_class based on Outcome column
landing_class = [0 if outcome in bad_outcome else 1 for outcome in data['Outcome

# Print the first few elements of landing_class to verify
print("First few elements of landing_class:")
print(landing_class[:10]) # Print the first 10 elements for verification
```

First few elements of landing\_class:

```
[1, 1, 1, 1, 1, 1, 1, 1, 1, 1]
```

This variable will represent the classification variable that represents the outcome of each launch. If the value is zero, the first stage did not land successfully; one means the first stage landed Successfully

```
In [13]: df['Class']=landing_class
df[['Class']].head(8)
```



Out[13]:

Class	
0	1
1	1
2	1
3	1
4	1
5	1
6	1
7	1

In [14]:

```
df.head(5)
```

Out[14]:

	FlightNumber	Date	BoosterVersion	PayloadMass	Orbit	LaunchSite	Outcome	Fli
0	1	2010-06-04	Falcon 9	6104.959412	LEO	CCAFS SLC 40	None	None
1	2	2012-05-22	Falcon 9	525.000000	LEO	CCAFS SLC 40	None	None
2	3	2013-03-01	Falcon 9	677.000000	ISS	CCAFS SLC 40	None	None
3	4	2013-09-29	Falcon 9	500.000000	PO	VAFB SLC 4E	False	Ocean
4	5	2013-12-03	Falcon 9	3170.000000	GTO	CCAFS SLC 40	None	None



We can use the following line of code to determine the success rate:

In [16]:

```
df["Class"].mean()
```

Out[16]: 1.0

In [19]:

```
import pandas as pd

# URL to fetch the dataset
url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS

# Load the dataset into a DataFrame
data = pd.read_csv(url)

# Calculate success rate
success_rate = data[data['Outcome'] == 'Success']['Outcome'].count() / len(data)

# Print the success rate
print(f"Success rate: {success_rate:.2f}%")
```

Success rate: 0.00%

```
df.to_csv("dataset_part_2.csv", index=False)
```

## Authors

[Joseph Santarcangelo](#) has a PhD in Electrical Engineering, his research focused on using machine learning, signal processing, and computer vision to determine how videos impact human cognition. Joseph has been working for IBM since he completed his PhD.

[Nayef Abou Tayoun](#) is a Data Scientist at IBM and pursuing a Master of Management in Artificial intelligence degree at Queen's University.

## Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2021-08-31	1.1	Lakshmi Holla	Changed Markdown
2020-09-20	1.0	Joseph	Modified Multiple Areas
2020-11-04	1.1.	Nayef	updating the input data
2021-05-026	1.1.	Joseph	updating the input data

Copyright © 2021 IBM Corporation. All rights reserved.