

SEMINAR REPORT

On

“BLUEJACKING”

Submitted in the partial Fulfillment for the award of degree of

Bachelor Of Computer Applications

Department of Computer Science

Uttaranchal College School of Computing Science

UTTARANCHAL UNIVERSITY, DEHRADUN

2023-24



Under the supervision of

Mr. Nitin Sharma

(Assistant Professor)

Uttaranchal School of

Computing science

Submitted By

Rohit Kumar

En. -UU2122000092

BCA 6th Sem

Roll No. 2122090096

ACKNOWLEDGEMENT

I would like to thank respected Mr. Nitin Sharma sir for giving me such a wonderful opportunity to expand my knowledge for my own branch and giving me guidelines to present a seminar report. It helped me a lot to realize of what we study for.

Secondly, I would like to thank my parents who patiently helped me as i went through my work and helped to modify and eliminate some of the irrelevant or un-necessary stuffs.

Thirdly, I would like to thank my friends who helped me to make my work more organized and well-stacked till the end.

Next, I would thank Microsoft for developing such a wonderful tool like MS Word. It helped my work a lot to remain error-free.

Last but clearly not the least, I would thank The Almighty for giving me strength to complete my report on time.

Rohit Kumar

DECLARATION

I hereby declare that the Report work entitled " **BLUE JACKING**" submitted to the UTTARANCHAL UNIVERSITY, DEHRADUN, is a record of an original work done by us under the guidance of **Mr. Nitin Sharma** and this Report work is submitted in the partial fulfillment of the requirements for the award of the degree of BCA carried out at "UTTARANCHAL SCHOOL OF COMPUTING SCIENCE".

CERTIFICATE OF ORIGINALITY

This is to certify that this report entitled “**BLUE JACKING**” is original work done by ROHIT KUMAR during this project submission as a partial fulfilment of the requirement for the Seminar report of Bachelor of Computer Application VI Sem, of the Uttarakhand University.

TABLE OF CONTENTS

S. No.	TOPICS	Page no.
i	ACKNOWLEDGEMENT	I
ii	DECLARATION	II
iii	CERTIFICATE OF ORIGINALITY	III
1.	CHAPTER 1: INTRODUCTION	1
2.	CHAPTER 2: : WHAT IS EFFECT OF BLUEJACKING ON THE FUTURE OF WORK	2
3.	CHAPTER 3: : HISTORY EFFECT OF BLUEJACKING ON THE FUTURE OF WORK	3
4.	CHAPTER 4: : THE TRANSFORMATIVE EFFECT OF BLUEJACKING ON THE FUTURE OF WORK	4
5.	CHAPTER 5: THE TRANFORMATIVE IMPACT OF RAY TRACING	5
6.	CONCLUSION	6
7.	REFERENCES	
8.	PLAGIARISM REPORT	

1. INTRODUCTION

Bluejacking is the sending of unsolicited messages over Bluetooth to Bluetooth-enabled devices such as mobile phones, PDAs or laptop computers, sending a vCard which typically contains a message in the name field (i.e. for bluedating or bluechat) to another Bluetooth enabled device via the OBEX protocol. Bluetooth has a very limited range; usually around 10 meters on mobile phones, but laptops can reach up to 100 meters with powerful transmitters.

Bluejacking allows phone users to send business cards anonymously using Bluetooth wireless technology. Bluejacking does not involve the removal or alteration of any data from the device. Bluejackers often look for the receiving phone to ping or the user to react. In order to carry out a bluejacking, the sending and receiving devices must be within 10 meters of one another. Phone owners who receive bluejack messages should refuse to add the contacts to their address book. Devices that are set in non-discoverable mode are not susceptible to bluejacking.

Mobile phones have been adopted as an everyday technology, and they are ubiquitous in social situations as users carry them around as they move through different physical locations throughout the day. As a communicative device, the mobile phone has been gradually taken up in ways that move beyond merely providing a channel for mediated conversation. One such appropriation is bluejacking, the practice of sending short, unsolicited messages via vCard

functionality to other Bluetooth-enabled phones. To choose the recipients of bluejacks, senders complete a scan using their mobile phones to search for the available Bluetooth-enabled devices in the immediate area. A bluejacker picks one of the available devices, composes a message within a body of the phone's contact interface, sends the message to the recipient, and remains in the vicinity to observe any reactions expressed by the recipient.

The messages tend to be anonymous since the recipient has no idea who has sent the bluejack, and the recipient has no information about the bluejacker, except for the name and model of the bluejacker's mobile phone. Because of Bluetooth's short-range networking capabilities, bluejacking can only occur between actors who are within 10 meters of each other, which makes this activity highly location-dependent. Contrary to what the name suggests, the bluejack recipient's phone is not hijacked; that is, the phone is at no time under the control of the bluejacker.

We conceptualize bluejacking as a violation of possessional territory. Inspired by Goffman, we propose that the mobile phone is a possessional territory as a result of the intimacy and continued contact between mobile phone users and their phones. A possessional territory, in our usage, is an object that engenders attachment and defense by those who perceive possession and can be referred to as a "personal effect." Possessional territories function "egocentrically"; that is, they move around with their owners who maintain and exert regulatory control, such as the definition of settings. Since we characterize the mobile phone as a possessional territory, we adapt the category of violation, defined as a temporary incursion where gaining control is not necessarily the goal as a likely and appropriate category

of infringement in this context.

We also propose that bluejackers are attempting to personalize their experience of public space by engaging in the violation of others' possessional territories through the act of illicit and anonymous messaging. Visitors to public spaces can engage in habitual behaviors at a specific location, such as picking a favorite parking spot that one can return to on each successive visit, to gain a sense of familiarity to locations that are frequently re-visited. These physical environments then hold enough significance to inspire defense among those who inhabit them and defensive behaviors, which can range from defining a personal space within a conversation or while using a tabletop work-surface. Typically, an inhabitant of a public place tends to personalize a location if he or she feels that the social conventions of a space allow one the license to mark a territory.

Bluejackers, however, ignore the conflict between the control exerted by the bluejacker and the lack of defensive measures that can be taken by the recipient when his or her possessional territory is violated. To gain a further understanding of why bluejackers would engage in a practice that disrupts the social conventions of public space, we ask the following research questions:

1. What are the characteristics of the public spaces in which bluejacking occurs?
2. What are the alternative social conventions that might arise from the practice of bluejacking?
3. What implications does this appropriation have for the design of mobile social systems?

2.WHAT IS EFFECT OF BLUEJACKING ON THE FUTURE OF WORK

As we know that bluejacking is the sending of unsolicited messages over Bluetooth to Bluetooth-enabled devices such as mobile phones, PDAs or laptop computers, sending a vCard which typically contains a message in the name field (i.e. for bluedating or bluechat) to another Bluetooth enabled device via the OBEX protocol. So bluejacking is based on Bluetooth technology which is explained bellow.

Bluetooth Technology was developed to solve the simple problem of eliminating the connector cable. The idea is to replace the cables that are needed to accompany portable devices carried by many mobile travelers with a low-cost, secure, robust RF link. Originally Bluetooth marketed to small handheld devices such as cell phones and laptops. As the Bluetooth standard emerged successfully into society, the world demanded more. It is reported on Lets Go Digital in an article written by Ilse Jurrien that three new Bluetooth products are qualified every day and 10 million Bluetooth units are shipped per week. Bluetooth is so efficient, effective, and secure that even the IEEE approved the 802.15.1 Standard for Wireless Person Area Networks based on the Bluetooth specification

- A. Individuals must check whether a home or room is available or not.
- B. C. Customers need to look for available apartments in a specific area, which is a time- consuming process.
- c. D. Customers are not aware of the location of the home.

3. HISTORY EFFECT OF BLUEJACKING ON THE FUTURE OF WORK

This bluejack phenomenon started after a Malaysian IT consultant named “Ajack” posted a comment on a mobile phone forum. Ajack told IT Web that he used his Ericsson cellphone in a bank to send a message to someone with a Nokia 7650.

Becoming bored while standing in a bank queue, Ajack did a Bluetooth discovery to see if there was another Bluetooth device around. Discovering a Nokia 7650 in the vicinity, he created a new contact and filled in the first name with ‘Buy Ericsson!’ and sent a businesscard to the Nokia phone.

“A guy a few feet away from me suddenly had his 7650 beep. He took out his 7650 and started looking at his phone. I couldn't contain myself and left the bank,” he says.

Ajack then posted the story on a mobile Web site and other people started trying it out.

“I gave it the name bluejacking (taken from the words Bluetooth and hijacking) and it has just taken off from there.”

He says bluejacking is common in Malaysia and is happening everywhere there are lots of Bluetooth devices.

Bluejacking has become popular among young people wanting to play practical jokes. A 13- year-old named Ellie from Surrey in the UK has started a dedicated bluejacking site called bluejackq. The site explains what bluejacking is and also has forums where people can share their bluejacking experiences.

Bluetooth technology operates in the unlicensed industrial, scientific and medical (ISM) band at 2.4 to 2.485 GHz, using a spread spectrum, frequency hopping, full-duplex signal at a nominal rate of 1600 hops/sec. Bluetooth is modulated using adaptive frequency hopping (AFH). This modulation has the capability to reduce interference between wireless technologies sharing the ISM band. It does this by having the ability to detect other devices using the ISM band and use only frequencies that are free. The signal itself hops between ranges of 79 frequencies at 1 Megahertz intervals to minimize interference

4. THE TRANSFORMATIVE EFFECT OF BLUEJACKING ON THE FUTURE OF WORK

Snarfing is information theft or data manipulation in wireless, local networks (→ WLAN). The word *snarf* probably is a portmanteau from *snort* and *scarf* and derived as a rather malicious form of sniffing. It is also an extremely likely that the term was coined from cartoon characters in American pop-culture.

In the US-American animated television series Thundercats (1980's) and Trollz (2000's) there are animated characters named "Snarf". In Thundercats lore, *Snarf*, an intelligent cat-like creature of the Snarf race, served as a loyal sidekick (mascot) to Lion-O and the other ThunderCats. While a snarf is incapable of evil, their virtuous attributes were outweighed by their penchant for being nosey and annoying (hence, one who "snarfs" is nosey and annoying). In Trollz lore, The Snarf usually is a neat, small dog with a very sensitive tracking nose, but it can turn into a cureless hungry monster, which is able to overcome large obstacles for foraging. I.e. a dog-like creature that is a "malicious sniffer".

Transferred to information technology, snarfing means that wireless devices are detected and then will be attacked by using vulnerabilities.

The "Snarfer" can simulate an internet exchange point by a man-in-the-middle attack for example and gather information or data. Snarfing occurred firstly at Bluetooth devices where the term bluesnarfing is in use. Snarfing can be made difficult drastically with appropriate security measures at hard- and software.

Bluesnarfing is the unauthorized access of information from a wireless device through a Bluetooth connection, often between phones, desktops, laptops, and PDAs. This allows access to a calendar, contact list, emails and text messages and on some phones users can steal pictures and private videos. Currently available programs must allow connection and to be 'paired' to another phone to steal content. There may be other programs that can break into the phones without any control, but if they exist they are not made publicly available by the developer. One instance of Bluesnarfing software that was demonstrated (but never made available for download) utilized weaknesses in the Bluetooth connection of some phones

This weakness has since been patched by the Bluetooth standard. There seems to be no available reports of phones being Bluesnarfed without pairing, since the patching of the Bluetooth standard.

Bluesnarfing is much more serious in relation to Bluejacking, but both exploit others' Bluetooth connections without their knowledge. Any device with its Bluetooth connection turned on and set to "discoverable" (able to be found by other Bluetooth devices in range) may be susceptible to Bluejacking, and possibly to Bluesnarfing when and if Bluesnarfing of the current Bluetooth security becomes possible. By turning off this feature, the potential victim can be safer from the possibility of being Bluesnarfed; although a device that is set to "hidden" may be Bluesnarfable by guessing the device's MAC address via brute force. However, this is difficult because Bluetooth uses a 48-bit unique MAC Address, so there are over 280 trillion possible addresses to guess (although the first 24 bits are common to a manufacturer which, so only 24 bits need be guessed). Because Bluesnarfing is an invasion of privacy, it is illegal in many countries.

It is important not to confuse Bluesnarfing with Bluejacking. While Bluejacking is essentially harmless and does not result in the exposure of any data in the victim's handset, Bluesnarfing is the stealing of information from the victim's Bluetooth device.

5.THE TRANSFORMATIVE IMPACT OF RAY TRACING

Bluebugging is a form of Bluetooth attack. In progression of discovery date, Bluetooth attack started with bluejacking, then bluesnarfing, and then bluebugging.

Bluebugging was discovered by German researcher Herfurt. His Bluebug program allows the user to take control of a victim's phone to call the user's phone. This means that the Bluebug user can simply listen to any conversation his victim is having in real life.

Initially, Bluebugging was carried out using laptops. With the advent of powerful PDAs and mobile devices, Bluebugging can now be carried out using these devices.

Further developments of Bluebugging tools has allowed Bluebugging to "take control" of the victim's phone. Not only can they make calls, they can send messages, essentially do anything the phone can do.

It should be noted that Bluebugging, like Bluesnarfing, is illegal in most countries

6.CONCLUSION

Bluejacking is technique by which we can interact with new people and has ability to revolutionise market by sending advertisement about the product, enterprise etc. on the Bluetooth configured mobile phone so that the people get aware about them by seeing them on the phone.

Now a day it is used in sale promotion or sale tools and in dating. This technique is used in many fields like cinema , train station, shopping malls ,mobile phone shops etc. now a days there are new tools available in the markets by which bluejacking can be done. The basic technology behind bluejacking is similar to Bluetooth because we can do bluejacking in the mobile or PADs or computers or laptop configured with Bluetooth.

Now a day new and new techniques are developing using Bluetooth. Some of the latest news is :

Bluetooth Technology Now Standard in Cars ,BlueParrott Bluetooth B100 Wireless Headset

,Motorola & Burton Launch Bluetooth Snowjackets ,Bluetooth shipment units 3m a week

,O'Neil Launches 'The Hub' Bluetooth Snowboard Jacket ,CellStar Launches Bluetooth Web Surfer ,Emergence of new Bluetooth usage_models ,Heart Monitor Sends Crucial Information to Cell Phones ,Impulsesoft Delivers Stereo Music Over Bluetooth ,TDK Systems builds on the benefits of Bluetooth ,Impulsesoft Delivers Stereo Music Over Bluetooth .

So we conclude that in future this technology become the key for advertising and to interact with world and to get the location messages on the phone when you are somewhere out. Bluejacks are location specific. We first wanted to determine the types of places where bluejacks took place. The data indicate that bluejacking is an activity that primarily occurs in public spaces, outside of the home. Bluejacks frequently occurred in public transportation locales (23.4%), stores and shopping malls (32.1%) and restaurants (9.8%), bars (11.2%) and cafes (7.3%) but almost never at home (0.7%). This suggests that bluejackers are targeting strangers, presumably taking advantage of anonymity, opportunities for interaction and available Bluetooth enabled devices afforded by densely populated public spaces. There are few security issue which can be minimized by taking some simple precaution like when you do not want to be blue jacked just off your Bluetooth.

7. REFERENCES

1. BluejackQ. <http://www.bluejackq.com/> [referenced 4 Nov 2003].
2. Clemson H, Coulton P, Edwards R, Chehimi F (2006) Mobslinger: the fastest mobile in the west. In: 1st world conference for fun 'n games, Preston, UK, pp 47–54, 26–28 June 2006 (in press)
3. Chehimi F, Coulton P, Edwards R (2006) Mobile advertising: practices, technologies and future potential. In: The 5th international conference on mobile business (ICMB 2006), Copenhagen, Denmark, 26–27 June 2006
4. T. Bunker. Serious Flaws in Bluetooth Security Lead to Disclosure of Personal Data, 2006. <http://www.thebunker.net/security/bluetooth.htm>.
5. Gifford, Ian, (January 2, 2007) “IEEE Approves IEEE 802.15.1 Standard for Wireless Personal Area Networks Adapted from the Bluetooth® Specification”, *IEEE*, Retrieved on 10.02.06 from: <http://standards.ieee.org/announcements/802151app.html>
6. Legg, Greg, (August 4, 2005) “The Bluejacking, Bluesnarfing, Bluebugging Blues: Bluetooth Faces Perception of Vulnerability”, *TechOnline*, Retrieved on 10.01.06 from: www.techonline.com./community/tech_topic/bluetooth/38467

• **IDENTIFICATION OF NEED**

- 1) **Market Analysis:** Our market analysis revealed that there is a growing demand for online rental platforms due to the convenience and efficiency they offer. We also identified a gap in the market for a user-friendly and comprehensive online room/home rental Web Application.
- 2) **User Analysis:** Our user analysis revealed that potential users, including renters, landlords, and property managers, are looking for a platform that is easy to use, offers a wide range of options, and provides reliable and secure transactions.
- 3) **Technical Feasibility:** Based on our technical feasibility evaluation, we determined that developing an online room/home rental Web Application is technically feasible, and we identified the necessary technologies, tools, and infrastructure required for development, hosting, and maintenance.
- 4) **Financial Feasibility:** Our financial feasibility analysis indicated that the startup costs and ongoing expenses for developing and operating an online room/home rental Web Application are within our budget, and we identified several revenue streams that could sustain the business.
- 5) **Legal and Regulatory Considerations:** Our analysis of legal and regulatory considerations revealed that there are several regulations and laws that must be considered when developing and operating an online room/home rental Web Application, including data privacy laws and rental regulations.
- 6) **Market Opportunity:** Our market opportunity evaluation revealed that there is a significant market opportunity for an online room/home rental Web Application, with a large and growing target demographic.
- 7) **Business Model:** Based on our analysis, we developed a business model that outlines the

revenue streams and cost structure for the online room/home rental Web Application, including fees charged to renters, landlords, or both.

- 8) **Risks and Mitigation Strategies:** We identified potential risks associated with developing and operating an online room/home rental Web Application, including legal and regulatory risks and security risks, and developed mitigation strategies to address them.

• **PRELIMINARY STUDY**

The current process of booking rooms or homes is slow and requires physical presence to inquire about available apartments. To address this issue, there is a need to develop a website that can offer a more convenient solution. The proposed system should have a simple interface that enables users to easily book the apartment they want without any hassle. This system would overcome the challenges faced in the current process and provide a faster and more efficient way of booking homes or rooms.

EXISTING SYSTEM

At present, the majority of property managers continue to handle their property and tenant information through physical documentation. When customers find a vacant house, they typically have to contact the property manager via phone or email to express their interest in renting a specific house. The property manager then responds by email, providing the customer with details about the requested property, such as the rent per month, deposit required, terms and conditions, and whether their request has been accepted. Unfortunately, the existing system relies solely on manual recording of user activities, which results in a large amount of paperwork. Additionally, the system solely offers a text-based interface, which may be less intuitive than a graphical user interface. The manual nature of the current system also contributes to slow response times.

PROPOSED SYSTEM

Initially, the user would Register and generate An individual profile, and upon logging in, the application would automatically display the number of available rental apartments in specific locations. These details would include the provider's name, apartment rent, Location's address, and contact number, which would enable the individual to prevent dealing with brokers. The system would also provide registration form. Every form would have multiple action buttons, Some of them are- new, search, cancel, back, and exit, that would allow the user to modify the database as needed.

Advantages

- Eradicate the use of physical documents
- Intuitive and easy to navigate
- Customizable and adaptable
- Efficient allocation of resources
- Highly secure and protected.

Disadvantages

- Data input inconsistency, increasing the possibility of errors and missing information.
- High expenses incurred for continuous staff training.
- System performance is reliant on individual expertise.
- Limited sharing of information and customer service, leading to inadequate security.
- Time-consuming and expensive report generation.

• FEASIBILITY STUDY

Feasibility assessment involves exploring all possible methods to resolve a difficulty. The suggested solution must meet all user needs and remain flexible enough to accommodate future changes as required.

• TECHNICAL FEASIBILITY

Technical feasibility involves examining the known components and necessary projects for system development to ensure that the developed methodology can interoperate and that the required technical team is available to create the system.

The proposed project, Online Home/Room Booking Web Application, is a comprehensive web application that utilizes several technologies and tools, including: [Please provide the list of technologies and tools associated with the proposed project.

Operating System	Windows 11
Frontend Technologies	HTML5, CSS3, Bootstrap 5, Typescript, JavaScript, CSS
Backend Technologies	PHP, JS
API's	ImgBB (Free image hosting service), Node mailer (Send Email), Google OAuth 2.0 (Syncing user's google calendar)
Database	SQL Server, Local host, WAMP Server
Platform	Visual Studio Code

Fig No.3.3.1- Software Used in Project

• **ECONOMICAL FEASIBILITY**

Economic feasibility involves conducting a cost-benefit analysis to evaluate the anticipated costs and benefits of a proposed system. Economic analysis is performed to assess the efficiency of the proposed system. It is a fundamental method in economic feasibility.

The cost of the proposed application will be primarily determined by the expenses incurred for hardware specifications. The platform specifications can be met at no additional cost, including the installation of free tool such as VS Code.

- **OPERATIONAL FEASIBILITY-**

Operational feasibility is a measure of how effectively a proposed system addresses the problems and challenges outlined during the requirement analysis and testing processes. We compared the operational component of the proposed system to the manual service currently in use and found that the proposed system is more advantageous from an operational standpoint.

• **PROJECT PLANNING**

Project goals and objectives: Clear project goals and objectives have been defined, outlining the purpose, scope, and objectives of the project.

Detailed project plan: A comprehensive project plan has been developed, including timelines, milestones, tasks, and responsibilities. Dependencies and risks have been identified, and contingency plans are in place.

Project team: A project team with the necessary skills and experience has been assembled, with clear roles and responsibilities defined.

Budget: A budget for the project has been created, including all costs associated with development, hosting, marketing, and legal fees.

Development platform: A suitable development platform has been chosen, based on the project's requirements and budget. The platform selected is scalable, secure, and has adequate support options.

User interface and experience: The user interface and experience have been designed, ensuring that the Web Application is easy to use, visually appealing, and provides a great user experience. Features such as property listings, booking tools, and messaging systems have been included to make the rental process easier.

Safety and security measures: Safety and security measures such as identity verification, background checks, and secure payment systems have been implemented to build trust among users.

Legal and regulatory compliance: The Web Application has been designed to comply with all relevant laws and regulations, including zoning laws, rental regulations, and tax laws. Legal experts have been consulted where necessary.

Testing and launch: The Web Application have been tested thoroughly to ensure that it is working as intended and is free from bugs and errors. The Web Application has been launched, and its performance is being monitored closely.

Marketing strategy: A marketing strategy has been developed to promote the Web Application and attract users. Social media, search engine optimization, and advertising campaigns are being used to promote the Web Application.

- **PROJECT SCHEDULING**

- **GANTT CHART**

A Gantt chart is a graphical illustration that represents a project's schedule of activities over time. It is a tool used to track and monitor the progress of each task and the individuals responsible for completing them. The chart usually includes information about the length of each task, the commencement and completion dates, and any interdependencies among tasks. A well-designed Gantt chart provides an overview of the project's timeline and helps stakeholders understand the order in which tasks need to be completed.

TASK	START DATE	END DATE	DURATION
REQUIREMENT ANALYSIS	15-02-2023	01-03-2023	17
DESIGN	02-03-2023	14-03-2023	12
CODING	25-03-2023	25-04-2023	30
TESTING	26-04-2023	04-05-2023	8
Deploy	05-05-2023	06-05-2023	01
Total Days			68

Table no. 3.5.1.1: Gantt chart table

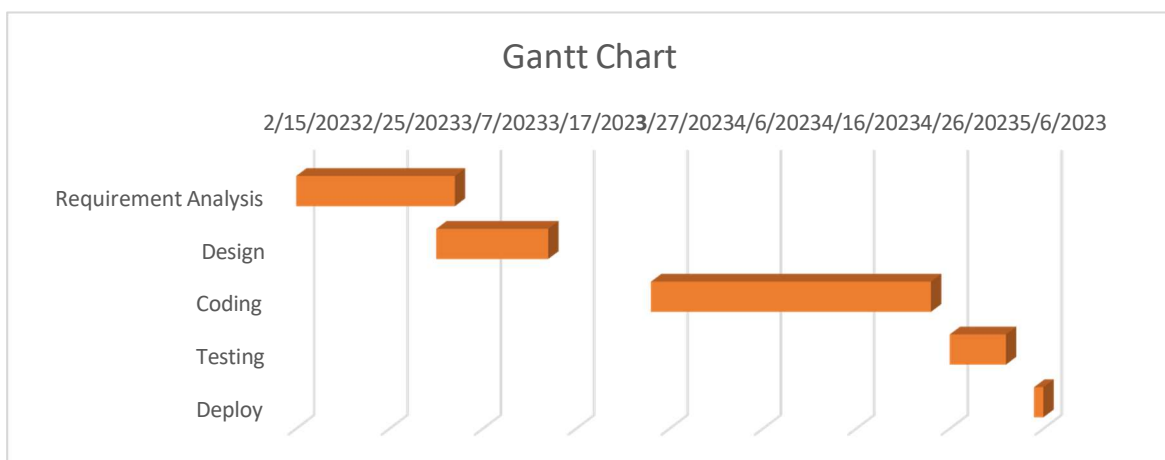


Fig 3.5.1.2: Gantt chart

- **Pert Chart**

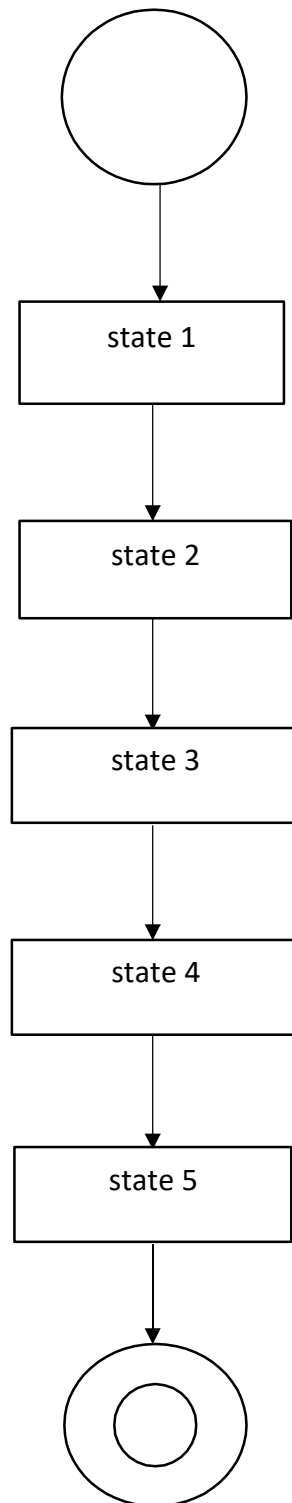


Fig 3.5.2

• **SOFTWARE REQUIREMENTS SPECIFICATION**

Introduction

The subsequent subsections of the SRS document offer an outline of the entire SRS.

Purpose

Our project aims to offer users with the necessary functionality as well as Providers and Administrator staff. This Web Application will automatically.

Scope

Both administrative staff and users will utilize the web application. Administrators will be able to easily add or remove details from the web application.

Benefits

This application simplifies processes, improves efficiency, enhances accessibility, and saves time.

• **Functional Requirement**

To accomplish this project, we must satisfy the following functional requirements:

- A login form that permits authorized users (administrators, members) to access the website.
- An event booking form that enables users to book events.

• **Non-Functional Requirement**

- The website must be user-friendly and easily accessible for both end users (users and administrative staff) to utilize effortlessly.
- The website must be secure by implementing a user ID and password login feature.

- Proper session implementation is required to prevent unauthorized access to web pages using URLs without logging in.
- The website must be portable and capable of running on any system and browser.

- **Software Engineering Paradigm Applied:**
 - The software engineering paradigm suitable for the above topic is the Agile methodology. Agile is a flexible and iterative approach to software development that emphasizes collaboration, customer satisfaction, and continuous improvement.
 - In an online home/room rental Web Application project, the Agile methodology can help ensure that the software development process is responsive to the needs of users and property owners. This approach allows for frequent feedback and testing, which can help identify issues early on and make necessary changes.
 - The Agile methodology involves breaking the project down into small, manageable iterations, with each iteration focusing on delivering a specific set of features. This approach allows for a more flexible development process, where changes and updates can be made based on feedback from stakeholders.
 - The Agile methodology also promotes communication and collaboration among team members. Adopting Agile methodology can aid in ensuring that all team members are working towards the same objectives and that any problems are resolved promptly.. This approach can also help ensure that the software development process is transparent and that stakeholders have a clear understanding of the progress being made.
 - Overall, the Agile methodology is well-suited to the development of an online home/room rental Web Application, as it allows for flexibility, collaboration, and continuous improvement, which are key to delivering a successful software product.

Tools/Platform Used

Minimum hardware used:

Laptop/Desktop

The following system requirements are necessary to run the software:

RAM: 512 MB RAM or more

Processor: Intel Core 2 Duo or more advanced

Processor Speed: 1.0 GHz or more

Hard Disk: 50 GB hard disk or more.

Software configurations:

Client

- ☐ **Forum design:** HTML
- ☐ **Look design:** CSS, Bootstrap
- ☐ **Java Script**

Server

- ☐ **Coding:** PHP, using notepad++/VS Code
- ☐ **Database:** MySQL

- **Data Models**
 - **ER diagram**

An ER (Entity-Relationship) diagram is a graphical illustration that represents the organization and structure of a database model that provides a visual representation of objects, their characteristics, and the connections between them. Entities represent real-world objects or concepts, while relationships represent the associations or connections between entities. Attributes describe the characteristics of an entity or relationship. ER diagrams are commonly used in software engineering to design and communicate database models.

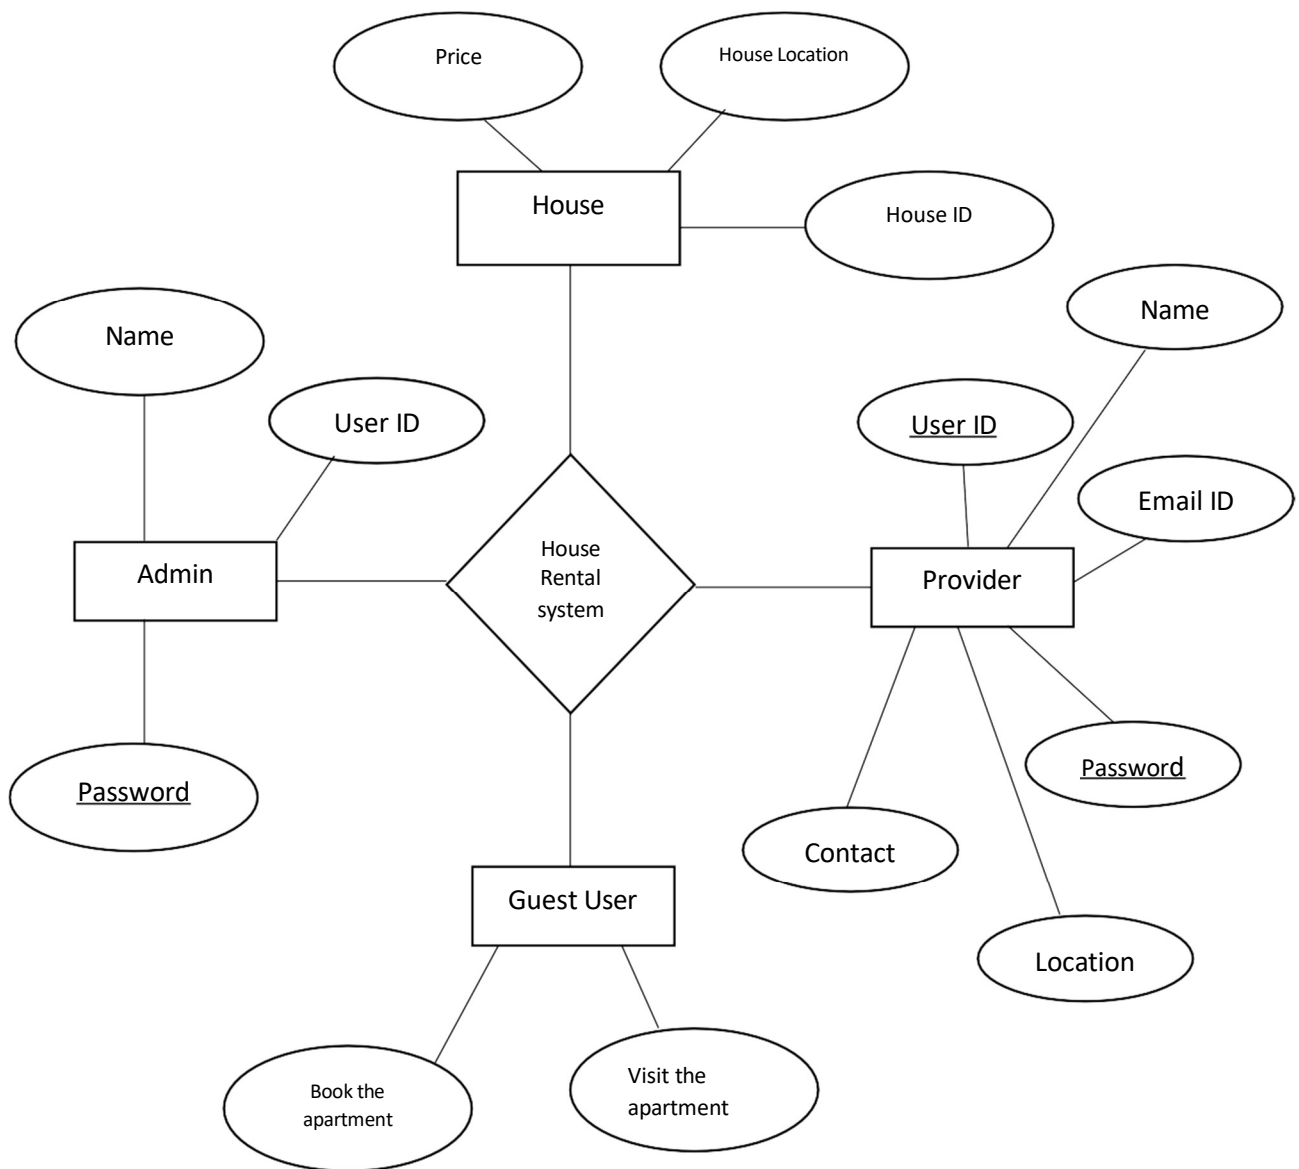


Fig 3.8.1: ER diagram

- **USE CASE DIAGRAM**

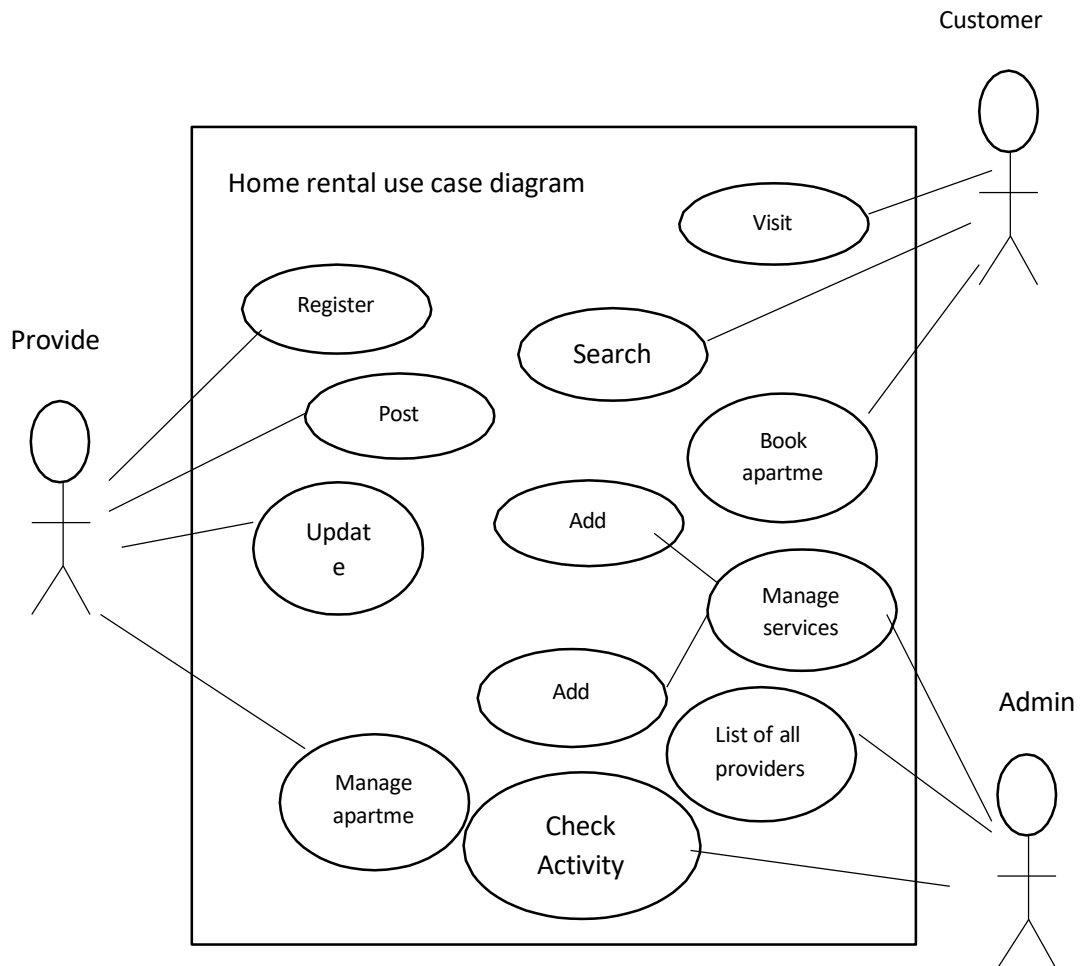


Fig 3.8.3: Use case diagram

5. System Design

- **MODULES DISCRIPTION**

- **Admin Module**

This administration module provides comprehensive information about customers, including their complaints. It encompasses several sub-modules such as login, user view, add/view rooms, send messages to customers, and view customer complaints. The login sub-module enables users to create and sign in to their accounts. The user view sub-module displays customer details. The add/view rooms sub-module allows the admin to add and view rooms. The send message sub-module enables the admin to communicate with customers. Additionally, the admin can access any complaints filed by customers via the view complaint sub-module. The module comprises the following sub-modules:

- Login
 - User View
 - Add/View Rooms
 - View Complaints from Customers

- **Guest User Module**

Guest User Modules does not contain any kind of details and information of the visitor, the current system user can visit and can contact to the Providers manually. Users have the ability to verify the information and availability of nearby rooms. Additionally, they can review the status of their bookings.

- Search the apartments
 - View the apartments
 - View the description/details of the apartment

- **PROVIDER MODULE**

The Provider module includes information on room availability. It allows customers to reserve available rooms online ahead of their intended use, rather than physically searching for vacant accommodations. Users can view room details within this module.

1. Login
2. Add and update apartment details
3. Can add multiple Apartments which
locates on different locations.

- **Data Integrity and Constraints**

Constraints are utilized to ensure the accuracy of the data stored in a database. Various types of constraints are applied to the attributes of tables to achieve this. Regarding the provider table, its database features a primary key with a NOT NULL constraint, and it is set to 'auto-increment', generating automatically. Furthermore, each associated table has a foreign key to validate its relationship.

- **Validation and constraints:**

If no values are entered during registration, a pop-up window will appear prompting the user to complete the form by providing the necessary details.

The image shows a 'SignUp' form with the following fields and elements:

- Back to Home** (link at the top left)
- SignUp** (title at the top center)
- Full Name** (label) and **User Name** (label)
- Full Name** (input field) and **User Name** (input field)
- Mobile** (label) and **Email** (label)
- 10 digit mobile number** (input field) and **Email** (input field)
- Password** (label) and **Confirm Password** (label)
- Password** (input field) and **Confirm Password** (input field)
- Submit** (button)
- Already registered? Login** (link)
- Please fill out this field.** (error message next to the Mobile field)

Fig 4.2.1.1: Provider Signup Form

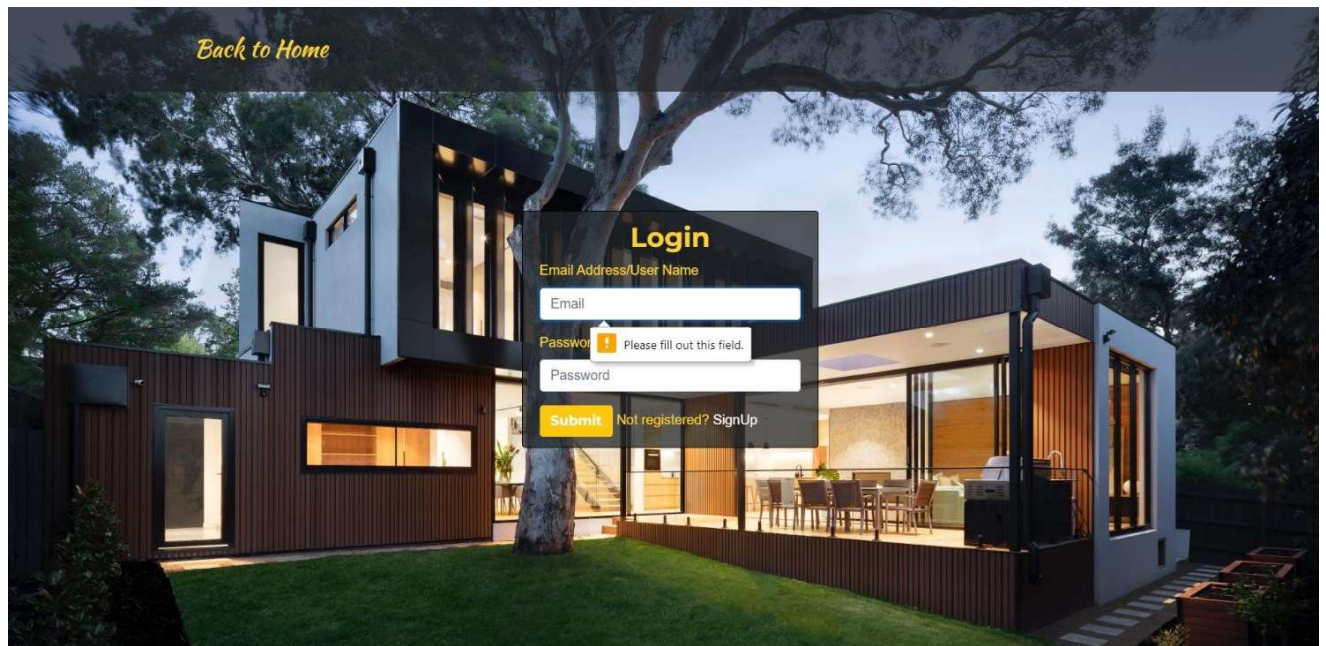


Fig 4.2.1.2: Provider Login Form

If you Input wrong Id Password, form will generate error


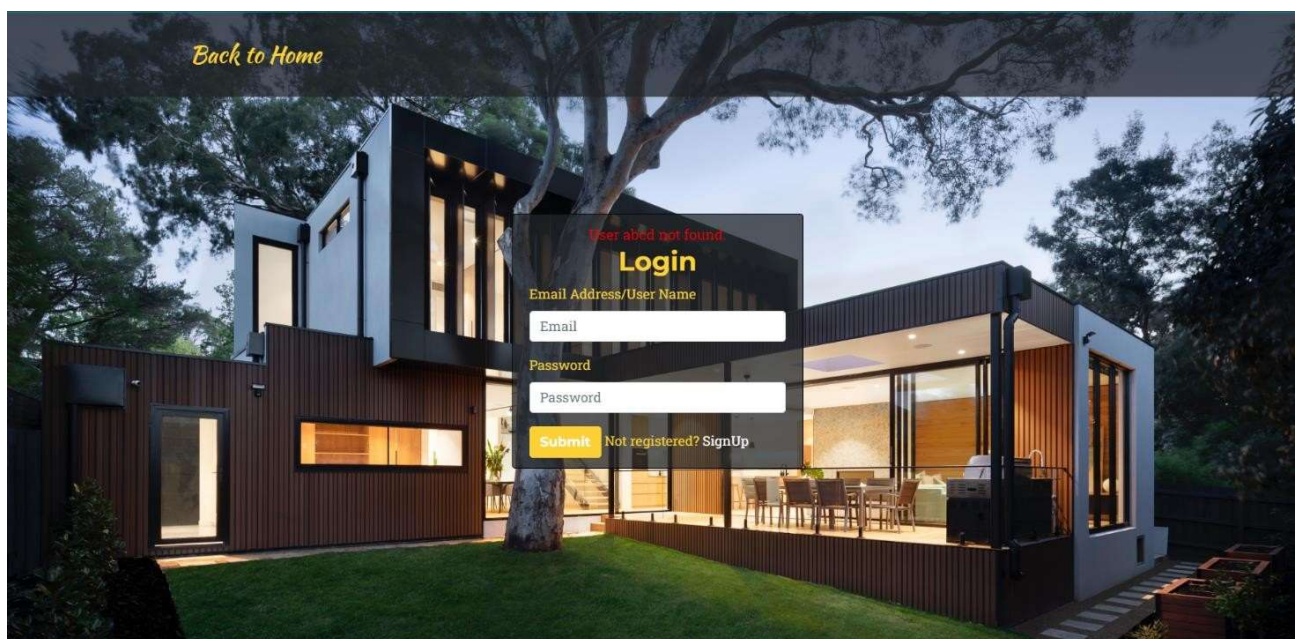


Fig 4.2.1.3

- **Database Design:**
- **Room Rental Registration:**

This Table stores the record of the Registered Apartments.

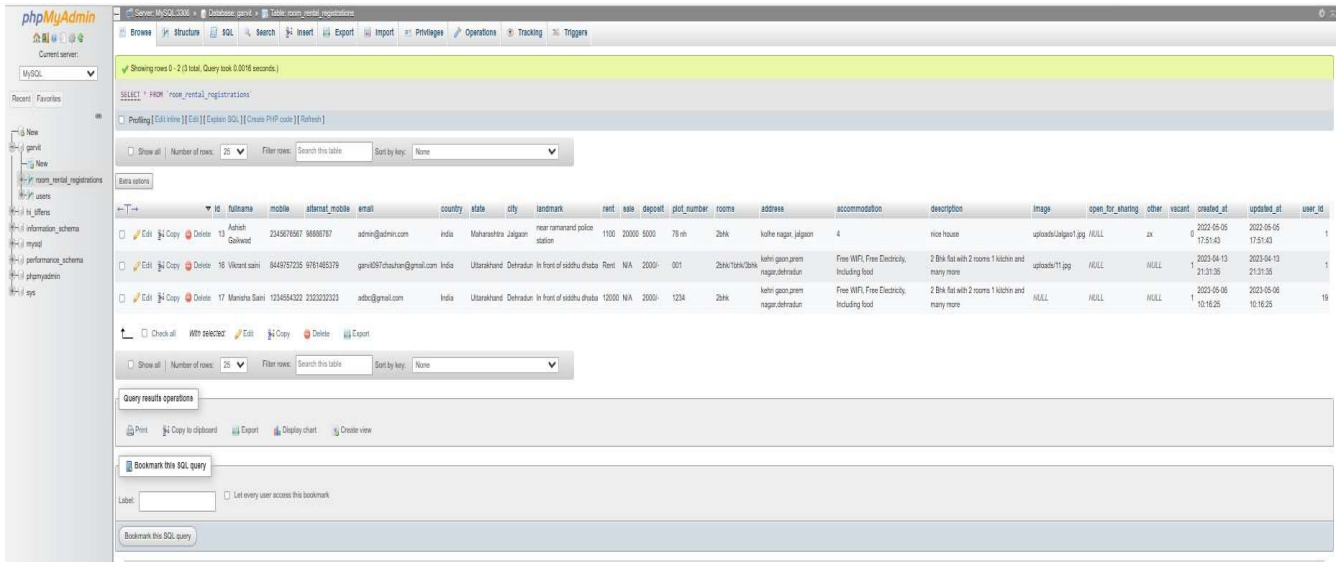

Showing rows 0 - 2 (3 total, Query took 0.0016 seconds)

SELECT * FROM `room\_rental\_registrations`

Buttons: [Refresh](#) [Edit view](#) [Edit SQL](#) [Create PHP code](#) [Refresh](#)

Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

	ID	fullname	mobile	alternate_mobile	email	country	state	city	landmark	rent	base	deposit	plot_number	rooms	address	accommodation	description	image	open_for_sharing	other	vacant	created_at	updated_at	user_id
☐	16	Adesh Gahwad	2345076567	98880767	adshg@adshg.com	India	Maharashtra	Jalgaon	near ramnagar police station	1100	20000	5000	78 sh	2bhk	kulhe nagar, jalgaon	4	rice house	uploads/ajgost.jpg	NULL	zk	6	2022-09-30 17:51:43	2022-09-30 17:51:43	1
☐	18	Vikrant saini	8449757225	9781463379	ganvi057@outlook.com	India	Uttarakhand	Dehradun	In front of siddhu dhaba	Rent	NA	2000/-	001	2bhk/tara/2bhk	kuhi garu green nagar,dehradun	Free WiFi, Free Electricity, including food	2 Bhk flat with 2 rooms 1 kitchen and many more	uploads/11.jpg	NULL	NULL	1	2023-04-13 21:31:35	2023-04-13 21:31:35	1
☐	17	Manisha Saini	1234567890	2323232323	adshg@gmail.com	India	Uttarakhand	Dehradun	In front of siddhu dhaba	12000	NA	2000/-	1234	2bhk	kuhi garu green nagar,dehradun	Free WiFi, Free Electricity, including food	2 Bhk flat with 2 rooms 1 kitchen and many more	NULL	NULL	NULL	1	2023-05-06 10:16:25	2023-05-06 10:16:25	19

Query results operations

[Print](#) [Copy to clipboard](#) [Export](#) [Display chart](#) [Create view](#)

Bookmark this SQL query

Label: ☐ Let every user access this bookmark

Bookmark this SQL query

Fig 4.3.1

- **User Registration:**

This table stores the record of user.

Showing rows 0 - 14 (15 total, Query took 0.0014 seconds)

SELECT * FROM `users`

Prototyping [Edit nine] [Edit] [Explain SQL] [Create PHP code] [Refresh]

Show all Number of rows: 25 Filter rows: Search this table Sort by key: None

	id	full_name	mobile	username	email	password	created_at	updated_at	role	status
☐ Edit ☐ Copy ☐ Delete	1	Group-7	9999999999	admin	admin@admin.com	21232f297a57a5a74369440e4a801fc3	NULL	NULL	admin	1
☐ Edit ☐ Copy ☐ Delete	2	Ashish Gaikwad	9090009090	ashu	ashu@gmail.com	89cd279e1dbab7a8518361894a388062	NULL	NULL	user	1
☐ Edit ☐ Copy ☐ Delete	7	Garvit kumar	9761465379	golu	garvit097chauhan@gmail.com	485329cd9f0db1e3602379d77e95344	2023-04-13 20:54:36	2023-04-13 20:54:36	user	1
☐ Edit ☐ Copy ☐ Delete	8	harshit kumar	7253870652	mangu	golu07@gmail.com	31b89b1c76d8a11b148051890c397	2023-04-17 21:33:11	2023-04-17 21:33:11	user	1
☐ Edit ☐ Copy ☐ Delete	9	Rakshit Gahlot	9527669554	Londa	gahlot99rakshit@gmail.com	f25834150c20280452c882800f745	2023-04-18 00:11:52	2023-04-18 00:11:52	user	1
☐ Edit ☐ Copy ☐ Delete	10	abcd	8888888888	aa	hagdga@gmail.com	74240cb203f6c2d79a72a2828d4c1	2023-04-18 00:14:33	2023-04-18 00:14:33	user	1
☐ Edit ☐ Copy ☐ Delete	11	abcd	9999999987	abc	golu07@gmail.com	e89a18c428cb38d5f280853878022e03	2023-04-18 15:05:18	2023-04-18 15:05:18	user	1
☐ Edit ☐ Copy ☐ Delete	12	hhhh	123454321	hhhh	123@gmail.com	1816ac0b4b213b0c5a0d486127f12	2023-04-18 15:10:23	2023-04-18 15:10:23	user	1
☐ Edit ☐ Copy ☐ Delete	13	xyz	1111111111	xyz	111@gmail.com	426840ce095652e2ecf980fda6c9c	2023-04-18 15:32:44	2023-04-18 15:32:44	user	1
☐ Edit ☐ Copy ☐ Delete	14	sss	3333333333	sss	sss@gmail.com	b8287281fb1675c25590289603ab077	2023-04-18 15:34:43	2023-04-18 15:34:43	user	1
☐ Edit ☐ Copy ☐ Delete	15	kkk	6565656556	kkk	kkk@gmail.com	54147d9de49af03369001591d0b0b3	2023-04-18 15:45:59	2023-04-18 15:45:59	user	1
☐ Edit ☐ Copy ☐ Delete	16	vvv	4444444444	vvv	vvv@gmail.com	95131501448188de54314b937b359c97	2023-04-18 22:18:00	2023-04-18 22:18:00	user	1
☐ Edit ☐ Copy ☐ Delete	17	shubham	5555555555	shubh	555@gmail.com	c895fcb9e8d069416ed50e04e5c1	2023-04-20 14:29:58	2023-04-20 14:29:58	user	1
☐ Edit ☐ Copy ☐ Delete	18	harshit chauhan	6665554545	harshit	mangu23@gmail.com	9db8926c3a20848a84065de5436348	2023-05-05 12:10:55	2023-05-05 12:10:55	user	1
☐ Edit ☐ Copy ☐ Delete	19	Manisha Saini	123454324	Manisha	adbc@gmail.com	eb81899924a88b3f13001d598a6e62	2023-05-06 10:10:27	2023-05-06 10:10:27	user	1

Query results operations

Print Copy to clipboard Export Display chart Create view

Fig 4.3.2

- **User Interface Design:**

Input design refers to the process of transforming user-centered inputs into a computer-readable format, which retrieves the supplier's credential information.

- **Home Page:** The following Figure is the Home Page of the Web Application. Which includes (Navigation bars) Search bar for Searching the Apartment in a specific location.

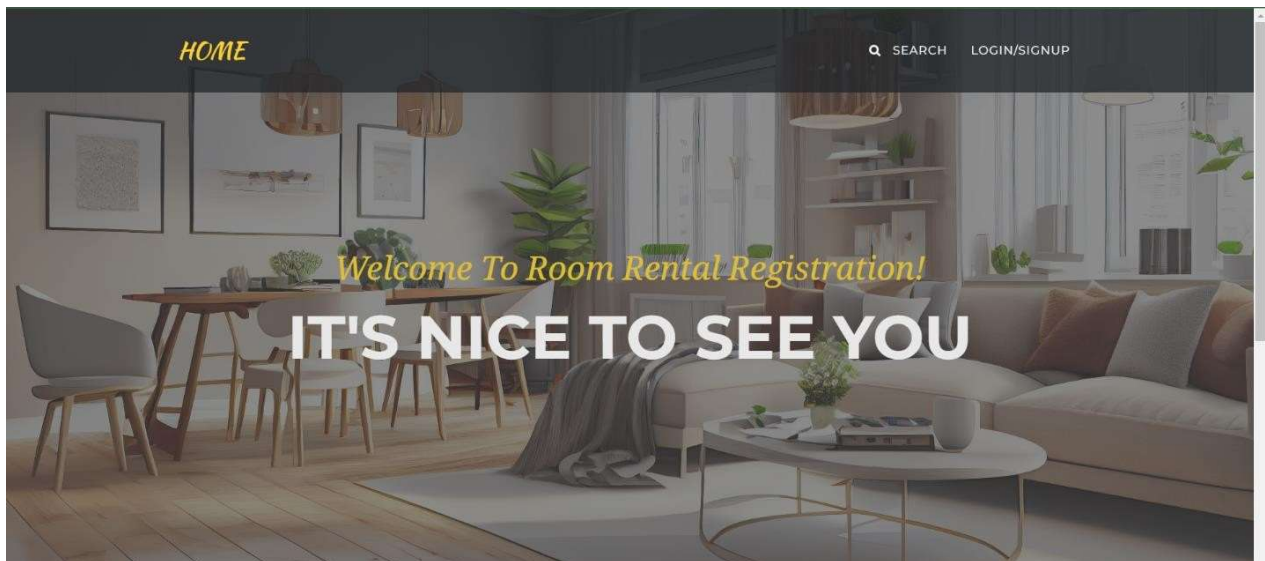


Fig 4.4.1.1

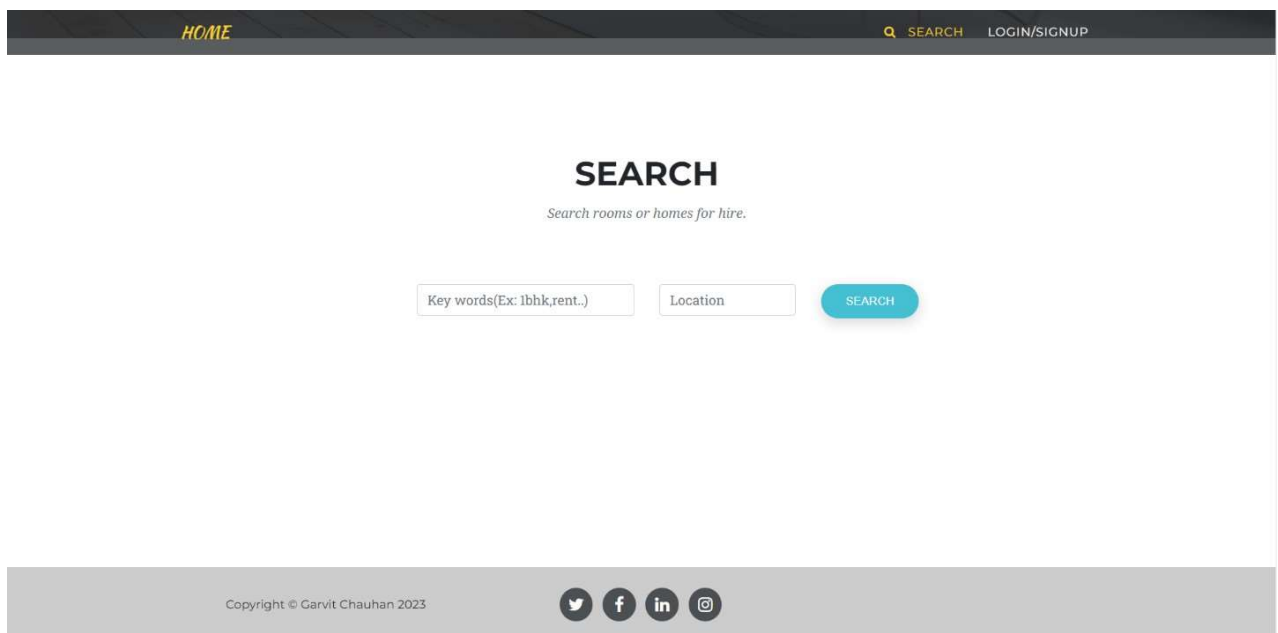


Fig 4.4.1.2

- **Login Page:** This is the login page of the web application.

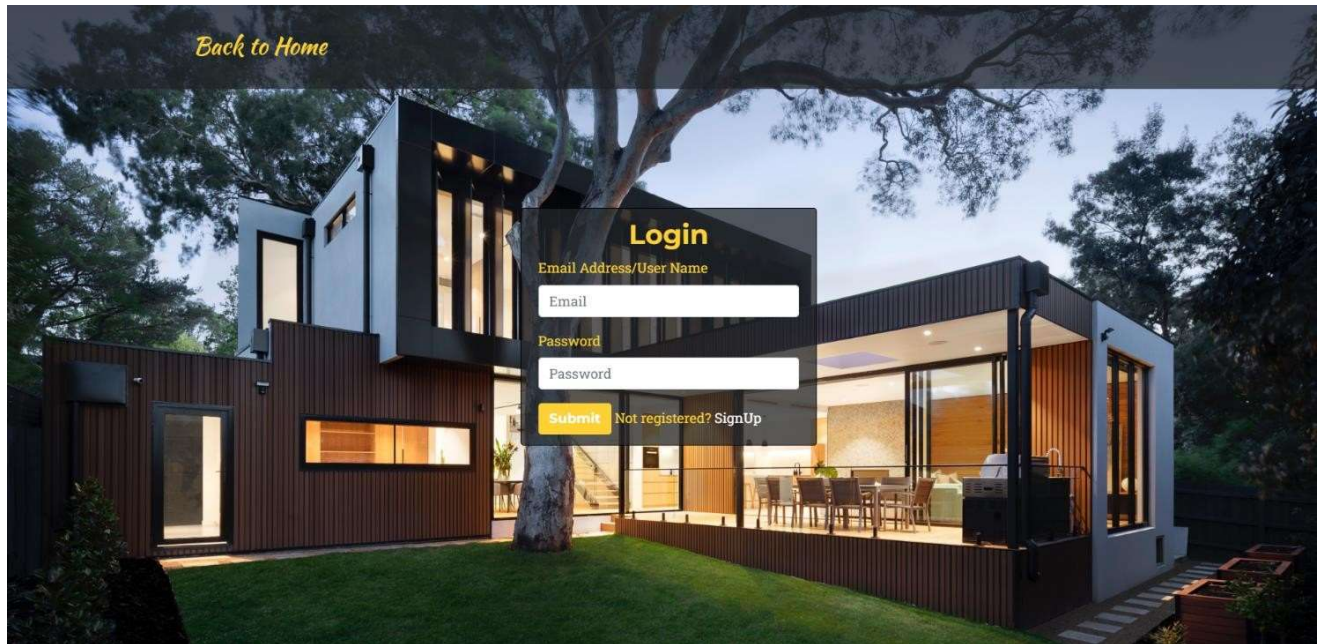


Fig 4.4.2

- **Signup Form:** This is the Signup page of the web application.

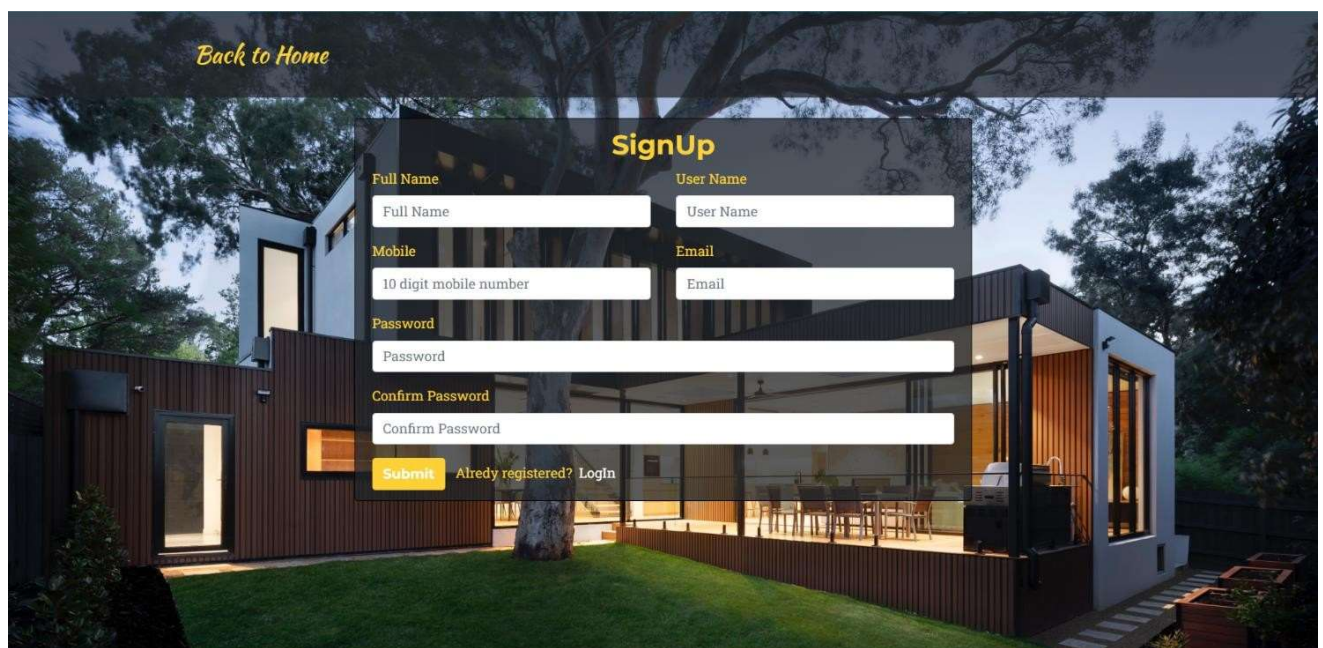


Fig 4.4.3

- **Provider:**
- **Profile Page (Provider):** The following figure is the profile page of provider.

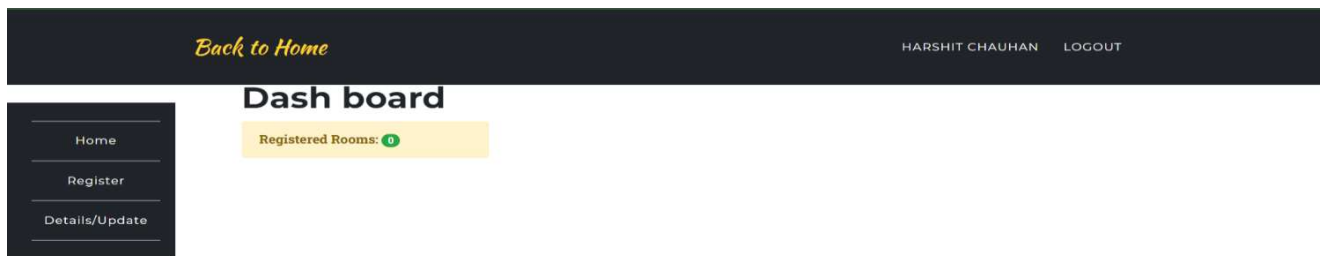


Fig 4.5.1

- **Apartment Registration Page:** This is apartment registration page of the web application.

The screenshot shows a web application interface for apartment registration. At the top, there is a dark navigation bar with the text "Back to Home" in orange on the left and "HARSHIT CHAUHAN" and "LOGOUT" on the right. Below this, the main content area has a dark sidebar on the left with three buttons: "Home", "Register", and "Details/Update". The main content area is titled "Individual Home Registration" in a light blue box. Below this, there is a form titled "Register Room" in a light blue box. The form contains several input fields and buttons:

- Full Name:** A text input field labeled "Full Name".
- Mobile:** A text input field labeled "10 digit mobile number".
- Alternat Mobile:** A text input field labeled "10 digit mobile number".
- Email:** A text input field labeled "Email".
- Plot Number/Home Number:** A text input field labeled "Plot Number/Home Number".
- Available Rooms:** A text input field labeled "1BHK/2BHK/3BHK/1RK".
- Country:** A text input field labeled "Country".
- State:** A text input field labeled "State".
- City:** A text input field labeled "City".
- Rent/Sale:** Two radio buttons labeled "Rent" and "Sale".
- Deposit:** A text input field labeled "Deposit".
- Facilities:** A text input field labeled "Facilities".
- Description:** A text input field labeled "Description".
- Landmark:** A text input field labeled "landmark".
- Address:** A text input field labeled "Address".
- Vacant/Occupied:** A dropdown menu with "Vacant" selected.
- Image:** A button labeled "Choose File" and the text "No file chosen".
- Submit:** A yellow button labeled "Submit".

Fig 4.5.2

- **Details Update:** This is details (apartment) updating page of the application.

[Back to Home](#)

HARSHIT CHAUHAN LOGOUT

[Home](#)
[Register](#)
[Details/Update](#)

Owner Details

Room Details

Other Details

Edit

Owner Name: harshit chauhan
Mobile Number: 7777777777
Alternate Number: 5656565656
Email: mangul2@gmail.com
Country: India
State: Uttarakhand
City: Dehradun
Address: asdg
Landmark: Near

Plot Number: 121
Sale: 500K
Available Rooms: 2bhk

Accommodation: All the Required
Description: Description
Vacant

Fig 4.5.3

- **Admin:**
- **Admin Profile:** This is the profile page of admin.

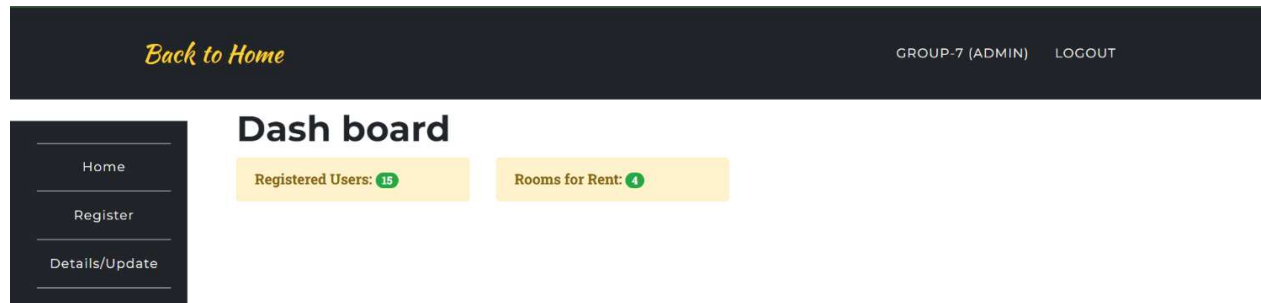


Fig 4.6.1

- **Admin Register Page:** This is the Apartment Register page of admin.

The screenshot shows the 'Register Room' page in the Admin interface. The header and sidebar are identical to the dashboard. The main content area has a title 'Register Room' in bold. Below the title, there is a form with multiple input fields organized in a grid. The form includes fields for 'Full Name', 'Mobile', 'Alternat Mobile', 'Email', 'Plot Number/Home Number', 'Available Rooms', 'Country', 'State', 'City', 'Rent', 'Sale', 'Deposit', 'Facilities', 'Description', 'Landmark', 'Address', 'Vacant/Occupied', and 'Image'. There is a 'Submit' button at the bottom left of the form. The 'Image' field has a 'Choose File' button and the text 'No file chosen'.

Fig 4.6.2

- **Details Update Page:** This is Details Update Page of Admin.

Back to Home GROUP-7 (ADMIN) LOGOUT

Owner Details

Owner Name: Ashish Gaikwad
 Mobile Number: 2345676567
 Alternate Number: 98888787
 Email: admin@admin.com
 Country: india
 State: Maharashtra
 City: Jalgaon
 Address: kolhe nagar, jalgaon
 Landmark: near ramanand police station

Room Details

Plot Number: 78 nh
 Sale: 20000
 Available Rooms: 2bhk

Other Details

Accommodation: 4
 Description: nice house
 Occupied

Edit

Owner Details

Owner Name: Vikrant saini
 Mobile Number: 8449757235

Room Details

Plot Number: 001
 Sale: N/A

Other Details

Accommodation: Free WIFI,
 Free Electricity, Including
 food

Edit

Fig 4.6.3

- **List of all the Registered Providers:** This is the List of all the registered Providers in admin module.

Back to Home GROUP-7 (ADMIN) LOGOUT

List Of Usres

#	Full Name	Email	Username	Role
0	Group-7	admin@admin.com	admin	admin
1	Ashish Gaikwad	ashu@gmail.com	ashu	user
2	Garvit kumar	garvit097chauhan@gmail.com	golu	user
3	harshit kumar	golu07@gmail.com	mangu	user
4	Rakshit Gahalot	gahalot96rakshit@gmail.com	Londa	user
5	abcd	hagddgaiu@gmail.com	aa	user
6	abcd	golu97@gmail.com	abc	user
7	hhhhh	123@gmail.com	hhhhh	user
8	xyz	111@gmail.com	xyz	user
9	sss	sss@gmail.com	sss	user
10	kkkk	kkk@gmail.com	kkk	user
11	vvv	vvv@gmail.com	vvv	user

Fig 4.6.4

- **List of all the Registered Apartments:** This is the List of all the registered Apartments in admin module.

[Back to Home](#)GROUP-7 (ADMIN) LOGOUT

[Home](#)[Register](#)[Details/Update](#)

List of Apartment Details

Owner Details	Room Details	Other Details	Edit
Owner Name: Ashish Gaikwad Mobile Number: 2345676567 Alternate Number: 98888787 Email: admin@admin.com Country: india State: Maharashtra City: Jalgaon  Address: kolhe nagar, jalgaon Landmark: near ramanand police station	Plot Number: 78 nh Sale: 20000 Available Rooms: 2bhk	Accommodation: 4 Description: nice house Occupied	

Fig 4.6.5

- **Users**
- **Search Result:** This is the after-search page of the application.

HOME
SEARCH
LOGIN/SIGNUP

SEARCH

Search rooms or homes for hire.

List of Apartment Details

Owner Details	Room Details	Other Details
Owner Name: Vikrant saini Mobile Number: 8449757235 Alternate Number: 9761465379 Email: garvit097chauhan@gmail.com Country: India State: Uttarakhand City: Dehradun 	Plot Number: 001 Sale: N/A Available Rooms: 2bhk/1bhk/3bhk Address: kehri gaon,prem nagar,dehradun Landmark: in front of siddhu dhaba	Accommodation: Free WIFI, Free Electricity, Including food Description: 2 Bhk flat with 2 rooms 1 kitchen and many more Vacant

Fig 4.7.1

6. Testing

- **Testing Techniques and Testing reports**

Unit Testing

Unit testing, which is also referred to as component testing, is a technique employed to assess the performance of a specific segment of code, usually at the function level. In object-oriented settings, testing is frequently conducted at the class level, with constructors and destructors being the fundamental unit tests.

Testing Objectives:

- Testing involves running a program with the objective of detecting any errors.
- An effective test case is one that is likely to expose an error that has not yet been identified.
- A test is considered successful if it brings to light an error that has not yet been discovered.

- **Test Cases**

- **Test case 1**

If an incorrect null value is entered, an error will be generated.

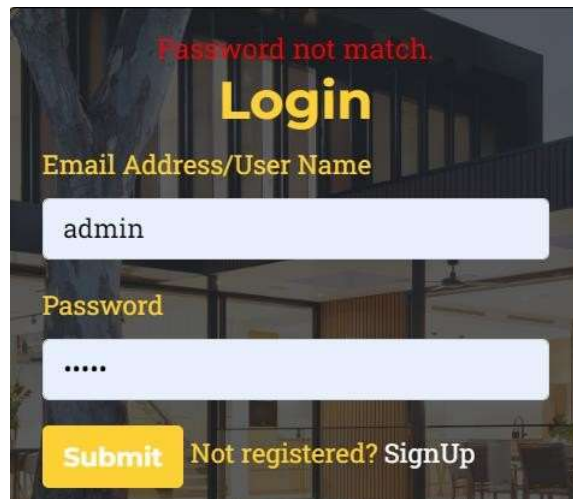


Fig 5.2.1.1


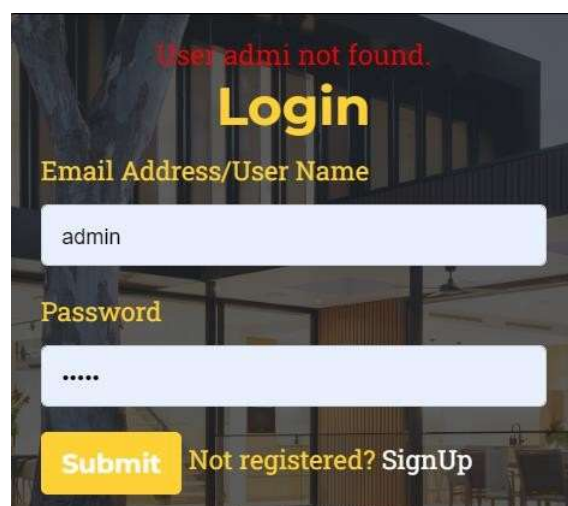


Fig 5.2.1.2: Test case 2

All the fields are mandatory and should be filled with the required details.

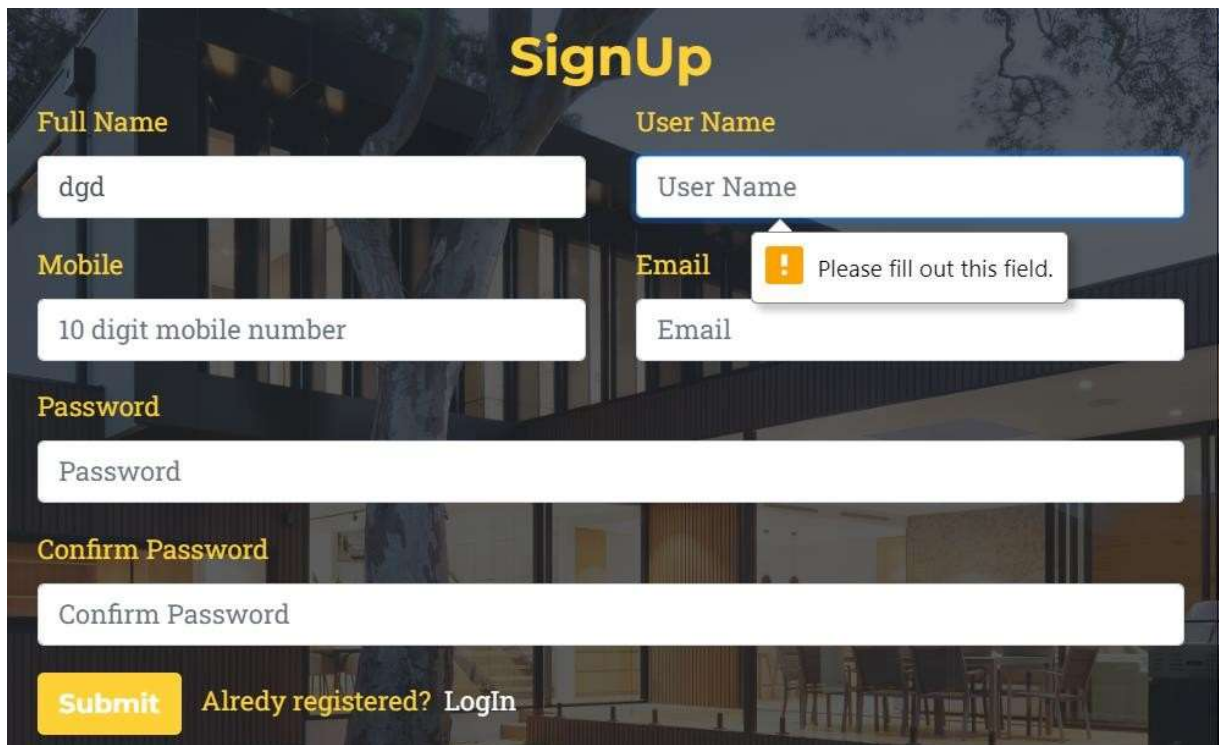

The image shows a 'SignUp' form with the following fields and labels:

- Full Name**: Input field containing 'dgd'.
- User Name**: Input field containing 'User Name'.
- Mobile**: Input field containing '10 digit mobile number'.
- Email**: Input field containing 'Email'. A validation error message 'Please fill out this field.' is displayed above the field.
- Password**: Input field containing 'Password'.
- Confirm Password**: Input field containing 'Confirm Password'.

At the bottom of the form, there is a yellow **Submit** button and a link that says 'Alredy registered? LogIn'.

Fig 5.2.1.3: Test case 3

7. System Security Measures

- **Secure and Robust Programming:**

Errors in programming can frequently result in system failures and security weaknesses, often stemming from inadequate management of exceptional scenarios, incomplete comprehension of programming languages, incomplete interface descriptions between components, and inadequate attention to concurrency and threading concerns.

To avoid such errors, this particular system has been programmed with special attention to prevent corruption or fatal errors during operation.

- **Data Security and Privacy:**

With the growing amount of data being collected, concerns about the proper handling of personal data have led to the development of database concepts.

The application package has been developed to address security and privacy concerns by offering users a secure location to store sensitive information or data, free from the risk of mishandling.

The system employs a unique number as a security measure to guarantee the safeguarding of user information.

8. Cost Estimation

The project was developed with no direct expenses since all the required tools and resources were either open source or available for free. However, it's essential to take into account the potential costs that may arise when developing a similar web application. These costs could include:

- **Development Costs:**

Creating this website demanded a significant investment of time and effort from the developer, which had an opportunity cost associated with it. Despite the absence of direct financial expenses, the developer dedicated a substantial amount of time and energy to complete the project.

- **Hosting Cost:**

- **Third-party costs:**

MySQL was used for the project's backend functionality, and it was free of charge up to a specific usage limit. Nevertheless, if the application scales up in usage or requires additional functionality, there may be costs involved in integrating third-party services or APIs.

In conclusion, while the project was developed without incurring any direct financial costs, it's crucial to take into account the potential expenses associated with developing and deploying a similar website. The total cost will depend on various factors such as the project's specific requirements, the development team's size, and other factors that may impact the project's success.

- Size of the project: 1000 Lines of Code (LOC)
- Development mode: Organic (simple and familiar)
- Team experience: Average
- Required reliability: Nominal
- Hardware constraints: Nominal
- Documentation: Nominal
- Required software flexibility: Nominal

The given inputs can be utilized to calculate the project's required effort utilizing the subsequent formula: $\text{Effort} = a * (\text{Size})^b * M$.

Where: - a and b are coefficients determined by the development mode (Organic, Semi-Detached, or Embedded)

- M is the product of various multipliers based on the other factors mentioned above

For an Organic project, the coefficients are $a=2.4$ and $b=1.05$. Using the COCOMO II table for multipliers, we can estimate the following values for the various factors:

- Required Reliability: 1.0
- Size: 1000 LOC
- Complexity: 1.0
- Team Experience: 1.0
- Hardware Constraints: 1.0
- Documentation: 1.0
- Required Software Flexibility: 1.0

Therefore, the total effort required for this project would be:

$$\text{Effort} = 2.4 * (1000)^{1.05} * 1.0$$

$$\text{Effort} = 2.99 \text{ person-months}$$

Assuming an average developer cost of ₹8,000 per month, the estimated cost of this project would be:

$$\text{Cost} = \text{Effort} * \text{Average Developer Cost}$$

$$\text{Cost} = 2.99 * ₹8,000$$

$$\text{Cost} = ₹23,920$$

9. SCOPE FOR FUTURE ENHANCEMENT

Our project aims to cater to the needs of rental house owners in the future. The user interfaces have been designed to be user-friendly, and we believe that this software package will be powerful enough to satisfy all user requirements. With utmost confidence, I am presenting this software to you with the expectation that it will resolve your issues and motivate you to embrace technology, which is intended to simplify and enhance our work processes.

I do not assert that my project is superior or that I have employed the most advanced technology. Rather, it is a straightforward and modest project that is easy to comprehend. In the future, we can further enhance the project by integrating a GPS system and providing a live chat online option for users. We could also extend the project to the iOS platform and include several state databases.

Additionally, we have the ability to enable local businesses to promote deals and coupons within a designated geographical region.

- ❖ The current system lacks a user login and signup module. However, in the future, I plan to incorporate a proper user module that will allow users to create their accounts. As of now, users can only view the properties and contact the owners manually.
- ❖ In the upcoming updates, I plan to integrate Map API into the application, which will provide users with the exact address and location of the apartments and properties. This feature will greatly enhance the user experience and help users easily locate their desired properties.
- ❖ In the upcoming updates, I plan to include the option for users to log in using their Gmail or Facebook accounts. This feature will simplify the login process for users, as they won't have to create separate login credentials for the application.
- ❖ In the upcoming updates, I plan to include an online payment option, which will allow users to pay the providers directly on the same platform. This feature will

simplify the payment process for users and providers, as they won't have to use a separate payment platform or make manual transactions.

10. APPENDICIES

Index.php

```
<?php
require 'config/config.php';
$data = [];

if(isset($_POST['search'])) {
    // Get data from FORM
    $keywords = $_POST['keywords'];
    $location = $_POST['location'];

    //keywords based search
    $keyword = explode(' ', $keywords);
    $concats = "(";
    $numItems = count($keyword);
    $i = 0;
    foreach ($keyword as $key => $value) {
        # code...
        if(++$i === $numItems){
            $concats .= "".$value.""";
        }else{
            $concats .= "".$value." ";
        }
    }
    $concats .= ")";
    //end of keywords based search

    //location based search
    $locations = explode(' ', $location);
    $loc = "(";
    $numItems = count($locations);
    $i = 0;
    foreach ($locations as $key => $value) {
        # code...
        if(++$i === $numItems){
            $loc .= "".$value.""";
        }else{
            $loc .= "".$value." ";
        }
    }
    $loc .= ")";
```

```
//end of location based search
```

```
try {  
    //foreach ($keyword as $key => $value) {  
        # code...
```

```
        $stmt = $connect->prepare("SELECT * FROM room_rental_registrations WHERE country IN  
$concats OR country IN $loc OR state IN $concats OR state IN $loc OR city IN $concats OR city IN $loc  
OR rooms IN $concats OR address IN $concats OR address IN $loc OR landmark IN $concats OR rent  
IN $concats OR deposit IN $concats");  
        $stmt->execute();  
        $data = $stmt->fetchAll(PDO::FETCH_ASSOC);
```

```
    }catch(PDOException $e) {  
        $errMsg = $e->getMessage();  
    }  
}  
?>
```

```
<!DOCTYPE html>  
<html lang="en">  
<head>
```

```
    <meta charset="utf-8">  
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">  
    <meta name="description" content="">  
    <meta name="author" content="">
```

```
<title>Room No17</title>
```

```
<!-- Bootstrap core CSS -->  
<link href="assets/plugins/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
<!-- Custom fonts for this template -->  
<link href="assets/plugins/font-awesome/css/font-awesome.min.css" rel="stylesheet"  
type="text/css">  
    <link href="https://fonts.googleapis.com/css?family=Montserrat:400,700" rel="stylesheet"  
type="text/css">
```

```

<link href='https://fonts.googleapis.com/css?family=Kaushan+Script' rel='stylesheet'
type='text/css'>
<link href='https://fonts.googleapis.com/css?family=Droid+Serif:400,700,400italic,700italic'
rel='stylesheet' type='text/css'>
<link href='https://fonts.googleapis.com/css?family=Roboto+Slab:400,100,300,700'
rel='stylesheet' type='text/css'>

<!-- Custom styles for this template -->
<link href="assets/css/rent.css" rel="stylesheet">
<link href="assets/css/style.css" rel="stylesheet">
</head>

<body id="page-top">
<!-- Navigation -->
<nav class="navbar navbar-expand-lg navbar-dark fixed-top" id="mainNav">
<div class="container">
<a class="navbar-brand js-scroll-trigger" href="#page-top">HOME</a>
<button class="navbar-toggler navbar-toggler-right" type="button" data-toggle="collapse" data-
target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-
label="Toggle navigation">
Menu
<i class="fa fa-bars"></i>
</button>
<div class="collapse navbar-collapse" id="navbarResponsive">
<ul class="navbar-nav text-uppercase ml-auto">

<li class="nav-item">
<a class="nav-link js-scroll-trigger" href="#search"><i class="fa fa-search"></i> &nbsp;
Search</a>
</li>

<?php
if(empty($_SESSION['username'])) {
echo '<li class="nav-item">';
echo '<a class="nav-link" href="/auth/login.php">LogIn/SignUp</a>';
echo '</li>';
} else {
echo '<li class="nav-item">';
echo '<a class="nav-link" href="/auth/dashboard.php">PROFILE</a>';
echo '</li>';

```

```
}  
?>
```

```
<!-- <li class="nav-item">  
  <a class="nav-link" href="/auth/register.php">LogIn/SignUp</a>  
  <a class="nav-link" href="/auth/login.php">LogIn/SignUp</a>  
</li> -->  
<!-- <li class="nav-item">  
  <a href="logout.php" class="nav-link">Logout</a>  
</li> -->  
  
</ul>  
</div>  
</div>  
</nav>  
  
<!-- Header -->  
<header class="masthead" >  
  <div class="container">  
    <div class="intro-text">  
      <div class="intro-lead-in">Welcome To Room Rental Registration!</div>  
      <div class="intro-heading text-uppercase">It's Nice To See You<br></div>  
    </div>  
  </div>  
  
</header>  
  
<!-- Search -->  
<section id="search">  
  <div class="container">  
    <div class="row">  
      <div class="col-lg-12 text-center">  
        <h2 class="section-heading text-uppercase">Search</h2>  
        <h3 class="section-subheading text-muted">Search rooms or homes for hire.</h3>  
      </div>  
    </div>  
    <div class="row">  
      <div class="col-md-12">  
        <form action="" method="POST" class="center" novalidate>  
          <div class="row">  
            <div class="col-md-6">  
              <div class="form-group">
```

```

        <input class="form-control" id="keywords" name="keywords" type="text"
placeholder="Key words(Ex: 1bhk,rent..)" required data-validation-required-message="Please enter
keywords">

```

```

        <p class="help-block text-danger"></p>
    </div>
</div>

```

```

<div class="col-md-4">
    <div class="form-group">
        <input class="form-control" id="location" type="text" name="location"
placeholder="Location" required data-validation-required-message="Please enter location.">
        <p class="help-block text-danger"></p>
    </div>
</div>

```

```

<div class="col-md-2">
    <div class="form-group">
        <button id="" class="btn btn-success btn-md text-uppercase" name="search"
value="search" type="submit">Search</button>
    </div>
</div>
</div>
</form>

```

```

<?php
if(isset($errMsg)){
    echo '<div style="color:#FF0000;text-align:center;font-size:17px;">'.$errMsg.'</div>';
}
if(count($data) != 0){
    echo "<h2 class='text-center'>List of Apartment Details</h2>";
}else{
    //echo "<h2 class='text-center' style='color:red;'>Try Some other keywords</h2>";
}
?>
<?php
foreach ($data as $key => $value) {
    echo '<div class="card card-inverse card-info mb-3" style="padding:1%;">
        <div class="card-block">';
        // echo '<a class="btn btn-warning float-right"
href="update.php?id='.$value['id'].'&act=';if(isset($value['ap_number_of_plats'])) { echo "ap"; }else{
echo "indi"; } echo "'>Edit</a>';
        echo ' <div class="row">
            <div class="col-4">
                <h4 class="text-center">Owner Details</h4>';
                echo '<p><b>Owner Name: </b>'.$value['fullname'].'</p>';

```



```

echo '<p><b>Mobile Number: </b>'. $value['mobile']. '</p>';
echo '<p><b>Alternate Number: </b>'. $value['alternat_mobile']. '</p>';
echo '<p><b>Email: </b>'. $value['email']. '</p>';
echo '<p><b>Country: </b>'. $value['country']. '</p><p><b> State:
</b>'. $value['state']. '</p><p><b> City: </b>'. $value['city']. '</p>';
if ($value['image'] != 'uploads/') {
    # code...
    echo '';
}

echo '</div>
<div class="col-5">
<h4 class="text-center">Room Details</h4>;
// echo '<p><b>Country: </b>'. $value['country']. '<b> State:
</b>'. $value['state']. '<b> City: </b>'. $value['city']. '</p>';
echo '<p><b>Plot Number: </b>'. $value['plot_number']. '</p>';

if(isset($value['sale'])) {
    echo '<p><b>Sale: </b>'. $value['sale']. '</p>';
}

if(isset($value['apartment_name']))
    echo '<div class="alert alert-success" role="alert"><p><b>Apartment Name:
</b>'. $value['apartment_name']. '</p></div>';

if(isset($value['ap_number_of_plats']))
    echo '<div class="alert alert-success" role="alert"><p><b>Plat Number:
</b>'. $value['ap_number_of_plats']. '</p></div>';

echo '<p><b>Available Rooms: </b>'. $value['rooms']. '</p>';
echo '<p><b>Address: </b>'. $value['address']. '</p><p><b> Landmark:
</b>'. $value['landmark']. '</p>';
echo '</div>
<div class="col-3">
<h4>Other Details</h4>;
echo '<p><b>Accommodation: </b>'. $value['accommodation']. '</p>';
echo '<p><b>Description: </b>'. $value['description']. '</p>';
if($value['vacant'] == 0){
    echo '<div class="alert alert-danger"
role="alert"><p><b>Occupied</b></p></div>';
}else{
    echo '<div class="alert alert-success" role="alert"><p><b>Vacant</b></p></div>';
}
echo '</div>
</div>

```

```

        </div>
    </div>';
}
?>
</div>
</div>
</div>
<br><br><br><br><br><br>
</section>

```

```
<footer style="background-color: #ccc;">
```

<div class="container">

```
<div class="row">
```

<div class="col-md-4">

Copyright © Rohit Chauhan 2023

</div>

<div class="col-md-4">

```
<ul class="list-inline social-buttons">
```

```
<li class="list-inline-item">
```


<i class="fa fa-twitter"></i>

```
<li class="list-inline-item">
```

<https://www.facebook.com/Rohit.Rohit.900>

<i class="fa fa-facebook"></i>

```
<li class="list-inline-item">
```

<https://www.linkedin.com/in/Rohit-kumar-0b3a23233>

<i class="fa fa-linkedin"></i>

```
<li class="list-inline-item">
```


<i class="fa fa-instagram"></i>

</div>

</div>

</footer>

```

<!-- Bootstrap core JavaScript -->
<script src="assets/plugins/jquery/jquery.min.js"></script>
<script src="assets/plugins/bootstrap/js/bootstrap.min.js"></script>

<!-- Plugin JavaScript -->
<script src="assets/plugins/jquery-easing/jquery.easing.min.js"></script>

<!-- Contact form JavaScript -->
<script src="assets/js/jqBootstrapValidation.js"></script>
<script src="assets/js/contact_me.js"></script>

<!-- Custom scripts for this template -->
<script src="assets/js/rent.js"></script>
</body>
</html>

```

dashboard.php

```

<?php
    require '../config/config.php';
    if(empty($_SESSION['username']))
        header('Location: login.php');

    if($_SESSION['role'] == 'admin'){
        $stmt = $connect->prepare('SELECT count(*) as register_user FROM users');
        $stmt->execute();
        $count = $stmt->fetch(PDO::FETCH_ASSOC);

        $stmt = $connect->prepare('SELECT count(*) as total_rent FROM
room_rental_registrations');
        $stmt->execute();
        $total_rent = $stmt->fetch(PDO::FETCH_ASSOC);

    }

    $stmt = $connect->prepare('SELECT count(*) as total_auth_user_rent FROM
room_rental_registrations WHERE user_id = :user_id');
    $stmt->execute(array(
        ':user_id' => $_SESSION['id']
    ));
    $total_auth_user_rent = $stmt->fetch(PDO::FETCH_ASSOC);

```

```

?>
<?php include '../include/header.php';?>
    <!-- Header nav -->
    <nav class="navbar navbar-expand-lg navbar-dark" style="background-color:#212529;"
id="mainNav">
    <div class="container">
        <a class="navbar-brand js-scroll-trigger" href="../index.php">Back to Home</a>
        <button class="navbar-toggler navbar-toggler-right" type="button" data-toggle="collapse" data-
target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-
label="Toggle navigation">
            Menu
            <i class="fa fa-bars"></i>
        </button>
        <div class="collapse navbar-collapse" id="navbarResponsive">
            <ul class="navbar-nav text-uppercase ml-auto">
                <li class="nav-item">
                    <a class="nav-link" href="#"><?php echo $_SESSION['fullname']; ?> <?php
if($_SESSION['role'] == 'admin'){ echo "(Admin)"; } ?></a>
                </li>
                <li class="nav-item">
                    <a href="logout.php" class="nav-link">Logout</a>
                </li>
            </ul>
        </div>
    </div>
</nav>
    <!-- end header nav -->
<?php include '../include/side-nav.php';?>
    <section class="wrapper" style="margin-left: 16%;margin-top: -11%;">
        <!-- <div class="container"> -->
        <!-- <div class="row"> -->
            <div class="col-md-12">
                <h1>Dash board</h1>
                <div class="row">

                    <?php
                        if($_SESSION['role'] == 'admin'){
                            echo '<div class="col-md-3">';
                            echo '<a
href="../app/users.php"><div class="alert alert-warning" role="alert">';
                                echo '<b>Registered Users: <span
class="badge badge-pill badge-success">'. $count['register_user'].'</span></b>';
                                echo '</div></a>';
                                echo '</div>';

```

```

    }
    ?>
    <?php
        if($_SESSION['role'] == 'admin'){
            echo '<div class="col-md-3">';
            echo '<a href=" ../app/list.php"><div
class="alert alert-warning" role="alert">';

            echo '<b>Rooms for Rent: <span
class="badge badge-pill badge-success">'.(intval($total_rent['total_rent'])).'</span></b>';
            echo '</div></a>';
            echo '</div>';

        }
    ?>
    <?php
        if($_SESSION['role'] == 'user'){
            echo '<div class="col-md-3">';
            echo '<a href=" ../app/list.php"><div
class="alert alert-warning" role="alert">';

            echo '<b>Registered Rooms: <span
class="badge badge-pill badge-
success">'. $total_auth_user_rent['total_auth_user_rent'].'</span></b>';
            echo '</div></a>';
            echo '</div>';

        }
    ?>
</div>
</div>
<!-- </div> -->
<!-- </div> -->
</section>
<?php include ' ../include/footer.php';?>

```

forgot.php

```

<?php
    require 'config.php';

    if(isset($_POST['forgotpass'])) {
        $errMsg = "";

        // Getting data from FROM
        $secretpin = $_POST['secretpin'];
    }

```

```

        if(empty($secretpin))
            $errMsg = 'Please enter your secret pin to view your password.';

        if($errMsg == '') {
            try {
                $stmt = $connect->prepare('SELECT password, secretpin FROM pdo
WHERE secretpin = :secretpin');
                $stmt->execute(array(
                    ':secretpin' => $secretpin
                ));
                $data = $stmt->fetch(PDO::FETCH_ASSOC);
                if($secretpin == $data['secretpin']) {
                    $viewpass = 'Your password is: ' . $data['password'] .
'<br><a href="login.php">Login Now</a>';
                }
                else {
                    $errMsg = 'Sercet pin not matched.';
                }
            }
            catch(PDOException $e) {
                $errMsg = $e->getMessage();
            }
        }
    }
?>

<html>
<head><title>Forgot Password</title></head>
    <style>
        html, body {
            margin: 1px;
            border: 0;
        }
    </style>
<body>
    <div align="center">
        <div style=" border: solid 1px #006D9C; " align="left">
            <?php
                if(isset($errMsg)){
                    echo '<div style="color:#FF0000;text-align:center;font-
size:17px;">'. $errMsg.'</div>';
                }
            ?>
            <div style="background-color:#006D9C; color:#FFFFFF;
padding:10px;"><b>Forgot Password</b></div>

```

```

        <?php
            if(isset($viewpass)){
                echo '<div style="color:#198E35;text-align:center;font-
size:17px;margin-top:5px">'.$viewpass.'</div>';
            }
        ?>
        <div style="margin: 15px">
            <form action="" method="post">
                <input type="text" name="secretpin" placeholder="Secret
Pin" autocomplete="off" class="box"/><br /><br />
                <input type="submit" name='forgotpass' value="Check"
class='submit'/><br />
            </form>
        </div>
    </div>
</body>
</html>

```

login.php

```

<?php
    require '../config/config.php';

    if(isset($_POST['login'])) {

        // Get data from FORM
        $username = $_POST['username'];
        $email = $_POST['username'];
        $password = $_POST['password'];

        try {
            $stmt = $connect->prepare('SELECT * FROM users WHERE username =
:username OR email = :email');
            $stmt->execute(array(
                ':username' => $username,
                ':email' => $email
            ));
            $data = $stmt->fetch(PDO::FETCH_ASSOC);

            if($data == false){
                $errMsg = "User $username not found.";
            }
            else {

```

```

        if(md5($password) == $data['password']) {
            $_SESSION['id'] = $data['id'];
            $_SESSION['username'] = $data['username'];
            $_SESSION['fullname'] = $data['fullname'];
            $_SESSION['role'] = $data['role'];
            header('Location: dashboard.php');
            exit;
        }
        else
            $errMsg = 'Password not match.';
    }
}
catch(PDOException $e) {
    $errMsg = $e->getMessage();
}
}
?>

```

```
<?php include '../include/header.php';?>
```

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
    <title>Login</title>
```

```
    <style>
```

```
    html, body {
```

```
    margin: 0;
```

```
    padding: 0;
```

```
    height: 100%;
```

```
    }
```

```
    #background-image {
```

```
    position: fixed;
```

```
    top: 0;
```

```
    left: 0;
```

```
    height: 100%;
```

```
    width: 100%;
```

```
    object-fit: cover;
```

```
    z-index: -1;
```

```
    }
```

```
        #col{
```

```
            color:white;
```

```
            text-decoration:none;
```

```
        }
```

```
    </style>
```

```
</head>
```



```

<body>
    
    <!-- Your login form here -->
</body>
</html>

    <!-- Services -->
    <nav class="navbar navbar-expand-lg navbar-dark" style="background-color:#212529bd;"
id="mainNav">
    <div class="container">
        <a class="navbar-brand js-scroll-trigger" href="../index.php">Back to Home</a>
        <!-- <button class="navbar-toggler navbar-toggler-right" type="button" data-toggle="collapse"
data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-
label="Toggle navigation">
            Menu
            <i class="fa fa-bars"></i>
        </button> -->
        <div class="collapse navbar-collapse" id="navbarResponsive">
            <ul class="navbar-nav text-uppercase ml-auto">
                <li class="nav-item">
                    <!-- <a class="nav-link" href="login.php">Login</a> -->
                </li>
                <!-- <li class="nav-item">
                    <a class="nav-link" href="SignUp.php">SignUp</a>
                </li> -->
            </ul>
        </div>
    </div>
</nav>

<section id="services">
    <div class="container">
        <div class="row">
            <div class="col-md-4 mx-auto">
                <div class="alert" role="alert" style="color: #FED136;background-
color: #212529bd;border-color: #000000;">
                    <?php
                        if(isset($errMsg)){
                            echo '<div style="color:#FF0000;text-
align:center;font-size:17px;">'.$errMsg.'</div>';
                        }
                    ?>

```

```

        <h2 class="text-center">Login</h2>
        <form action="" method="post">
            <div class="form-group">
                <label for="exampleInputEmail1">Email Address/User
Name</label>
                <input type="text" class="form-control"
id="exampleInputEmail1" placeholder="Email" name="username" required>
            </div>
            <div class="form-group">
                <label for="exampleInputPassword1">Password</label>
                <input type="password" class="form-control"
id="exampleInputPassword1" placeholder="Password" name="password" required>
            </div>
            <button type="submit" class="btn btn-primary"
name='login' value="Login">Submit</button>
            <h8>Not registered?</h8>
            <a id="col" href="SignUp.php">SignUp</a>
            <!-- class="nav-link" -->
        </form>
    </div>
</div>
</div>
</div>
</section>
<?php include '../include/footer.php';?>

```

logout.php

```

<?php
    require '../config/config.php';
    session_destroy();
    header('Location: ../index.php');
?>

```

remove.php

```

<?php
    require '../config/config.php';
    session_destroy();
    header('Location: ../index.php');
?>

```

SignUp.php

```

<?php
    require '../config/config.php';

    if(isset($_POST['SignUp'])) {
        $errMsg = "";

        // Get data from FROM
        $username = $_POST['username'];
        $mobile = $_POST['mobile'];
        $email = $_POST['email'];
        $password = $_POST['password'];
        $fullname = $_POST['fullname'];

        try {
            $stmt = $connect->prepare('INSERT INTO users (fullname, mobile, username, email,
password) VALUES (:fullname, :mobile, :username, :email, :password)');
            $stmt->execute(array(
                ':fullname' => $fullname,
                ':username' => $username,
                ':password' => md5($password),
                ':email' => $email,
                ':mobile' => $mobile,
            ));
            header('Location: submitted.php'); // Redirect to the submitted page
            exit();
        } catch(PDOException $e) {
            echo $e->getMessage();
        }
    }

    if (isset($_GET['action']) && $_GET['action'] == 'joined') {
        $errMsg = 'Registration successfull. Now you can login';
    }
?>

<!-- Your existing HTML code goes here -->

<!-- Your existing HTML code or any additional sections go here -->

<?php include '../include/header.php';?>
    <!-- Services -->

```

```

        <nav class="navbar navbar-expand-lg navbar-dark" style="background-color:#212529bd;"
id="mainNav">
    <div class="container">
        <a class="navbar-brand js-scroll-trigger" href="../index.php">Back to Home</a>
        <!-- <button class="navbar-toggler navbar-toggler-right" type="button" data-toggle="collapse"
data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-
label="Toggle navigation">
            Menu
            <i class="fa fa-bars"></i>
        </button> -->
    <div class="collapse navbar-collapse" id="navbarResponsive">
        <ul class="navbar-nav text-uppercase ml-auto">
            <!-- <li class="nav-item">
                <a class="nav-link" href="login.php">Login</a>
            </li> -->
            <li class="nav-item">
                <!-- <a class="nav-link" href="register.php">Register</a> -->
            </li>
        </ul>
    </div>
</div>
</nav>

```

```

        <!DOCTYPE html>
<html>
<head>
    <title>Login</title>
    <style>
html, body {
    margin: 0;
    padding: 0;
    height: 100%;
}

#background-image {
    position: fixed;
    top: 0;
    left: 0;
    height: 100%;
    width: 100%;
    object-fit: cover;
    z-index: -1;
}

#col{

```

```

        color:white;
        text-decoration:none;

    }

</style>
</head>
<body>
    
    <!-- Your login form here -->
</body>
</html>
<!-- <section> --><br>
    <div class="container">
        <div class="row">
            <div class="col-md-8 mx-auto">
                <div class="alert" role="alert" style="color: #FED136;background-
color: #212529bd;border-color: #000000;">
                    <?php
                        if(isset($errMsg)){
                            echo '<div style="color:#28a745;text-
align:center;font-size:17px;">'.$errMsg.'</div>';
                        }
                    ?>
                    <h2 class="text-center">SignUp</h2>
                    <form action="" method="post">
                        <div class="row">
                            <div class="col-6">
                                <div class="form-group">
                                    <label for="fullname">Full Name</label>
                                    <input type="text" class="form-control"
id="fullname" placeholder="Full Name" name="fullname" required>
                                </div>
                            </div>
                            <div class="col-6">
                                <div class="form-group">
                                    <label for="username">User
Name</label>
                                    <input type="text" class="form-control"
id="username" placeholder="User Name" name="username" required>
                                </div>
                            </div>
                        </div>
                    <div class="row">
                        <div class="col-6">

```

```

        <div class="form-group">
            <label for="mobile">Mobile</label>
            <input type="text" class="form-control"
pattern="^\d{10}$" id="mobile" title="10 digit mobile number" placeholder="10 digit mobile
number" name="mobile" required>
        </div>
    </div>
    <div class="col-6">
        <div class="form-group">
            <label for="email">Email</label>
            <input type="email" class="form-control"
id="email" placeholder="Email" name="email" required>
        </div>
    </div>
</div>

    <div class="form-group">
        <label for="password">Password</label>
        <input type="password" class="form-control"
id="password" placeholder="Password" name="password" required>
    </div>

    <div class="form-group">
        <label for="c_password">Confirm Password</label>
        <input type="password" class="form-control"
id="c_password" placeholder="Confirm Password" name="c_password" required>
    </div>

    <button type="submit" class="btn btn-primary"
name='SignUp' value="SignUp">Submit</button>

    <h8 > &nbsp;&nbsp;&nbsp;Alredy registered?&nbsp;&nbsp;&nbsp; </h8>
    <a id="col" href="login.php">LogIn</a>
    <!-- <a class="nav-link" href="login.php">LogIn</a> -->

</form>
</div>
</div>
</div>
</div>
<!-- </section> -->
<?php include '../include/footer.php';?>

```

```

<?php
    require '../config/config.php';

    if(isset($_POST['SignUp'])) {
        $errMsg = "";

        // Get data from FROM
        $username = $_POST['username'];
        $mobile = $_POST['mobile'];
        $email = $_POST['email'];
        $password = $_POST['password'];
        $fullname = $_POST['fullname'];

        try {
            $stmt = $connect->prepare('INSERT INTO users (fullname, mobile, username, email,
password) VALUES (:fullname, :mobile, :username, :email, :password)');
            $stmt->execute(array(
                ':fullname' => $fullname,
                ':username' => $username,
                ':password' => md5($password),
                ':email' => $email,
                ':mobile' => $mobile,
            ));
            header('Location: submitted.php'); // Redirect to the submitted page
            exit();
        } catch(PDOException $e) {
            echo $e->getMessage();
        }
    }

    if (isset($_GET['action']) && $_GET['action'] == 'joined') {
        $errMsg = 'Registration successfull. Now you can login';
    }
?>

<!-- Your existing HTML code goes here -->

<!-- Your existing HTML code or any additional sections go here -->

<?php include '../include/header.php';?>
    <!-- Services -->

```

```

        <nav class="navbar navbar-expand-lg navbar-dark" style="background-color:#212529bd;"
id="mainNav">
    <div class="container">
        <a class="navbar-brand js-scroll-trigger" href="../index.php">Back to Home</a>
        <!-- <button class="navbar-toggler navbar-toggler-right" type="button" data-toggle="collapse"
data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-
label="Toggle navigation">
            Menu
            <i class="fa fa-bars"></i>
        </button> -->
    <div class="collapse navbar-collapse" id="navbarResponsive">
        <ul class="navbar-nav text-uppercase ml-auto">
            <!-- <li class="nav-item">
                <a class="nav-link" href="login.php">Login</a>
            </li> -->
            <li class="nav-item">
                <!-- <a class="nav-link" href="register.php">Register</a> -->
            </li>
        </ul>
    </div>
</div>
</nav>

```

```

        <!DOCTYPE html>
<html>
<head>
    <title>Login</title>
    <style>
html, body {
    margin: 0;
    padding: 0;
    height: 100%;
}

#background-image {
    position: fixed;
    top: 0;
    left: 0;
    height: 100%;
    width: 100%;
    object-fit: cover;
    z-index: -1;
}

#col{

```



```

        color:white;
        text-decoration:none;

    }

</style>
</head>
<body>
    
    <!-- Your login form here -->
</body>
</html>
<!-- <section> --><br>
    <div class="container">
        <div class="row">
            <div class="col-md-8 mx-auto">
                <div class="alert" role="alert" style="color: #FED136;background-
color: #212529bd;border-color: #000000;">
                    <?php
                        if(isset($errMsg)){
                            echo '<div style="color:#28a745;text-
align:center;font-size:17px;">'.$errMsg.'</div>';
                        }
                    ?>
                    <h2 class="text-center">SignUp</h2>
                    <form action="" method="post">
                        <div class="row">
                            <div class="col-6">
                                <div class="form-group">
                                    <label for="fullname">Full Name</label>
                                    <input type="text" class="form-control"
id="fullname" placeholder="Full Name" name="fullname" required>
                                </div>
                            </div>
                            <div class="col-6">
                                <div class="form-group">
                                    <label for="username">User
Name</label>
                                    <input type="text" class="form-control"
id="username" placeholder="User Name" name="username" required>
                                </div>
                            </div>
                        </div>
                    <div class="row">
                        <div class="col-6">

```

```

        <div class="form-group">
            <label for="mobile">Mobile</label>
            <input type="text" class="form-control"
pattern="^\d{10}$" id="mobile" title="10 digit mobile number" placeholder="10 digit mobile
number" name="mobile" required>
        </div>
    </div>
    <div class="col-6">
        <div class="form-group">
            <label for="email">Email</label>
            <input type="email" class="form-control"
id="email" placeholder="Email" name="email" required>
        </div>
    </div>
</div>

    <div class="form-group">
        <label for="password">Password</label>
        <input type="password" class="form-control"
id="password" placeholder="Password" name="password" required>
    </div>

    <div class="form-group">
        <label for="c_password">Confirm Password</label>
        <input type="password" class="form-control"
id="c_password" placeholder="Confirm Password" name="c_password" required>
    </div>

    <button type="submit" class="btn btn-primary"
name='SignUp' value="SignUp">Submit</button>

    <h8 > &nbsp;&nbsp;&nbsp;Alredy registered?&nbsp;&nbsp;&nbsp; </h8>
    <a id="col" href="login.php">LogIn</a>
    <!-- <a class="nav-link" href="login.php">LogIn</a> -->

</form>
</div>
</div>
</div>
</div>
<!-- </section> -->
<?php include '../include/footer.php';?>

```

```

<?php
    require 'config.php';
    if(empty($_SESSION['name']))
        header('Location: login.php');

?>

<html>
<head><title>Update</title></head>
    <style>
        html, body {
            margin: 1px;
            border: 0;
        }
    </style>
<body>
    <div align="center">
        <div style="border: solid 1px #006D9C; " align="left">
            <?php
                if(isset($errMsg)){
                    echo '<div style="color:#FF0000;text-align:center;font-size:17px;">'.$errMsg.'</div>';
                }
            ?>
            <div style="background-color:#006D9C; color:#FFFFFF; padding:10px;"><b><?php echo $_SESSION['name'] ?></b></div>
            <div style="margin: 15px">
                <form action="" method="post">
                    Fullname <br>
                    <input type="text" name="fullname" value="<?php echo $_SESSION['name']; ?>" autocomplete="off" class="box"/><br /><br />
                    Username <br>
                    <input type="text" name="username" value="<?php echo $_SESSION['username']; ?>" disabled autocomplete="off" class="box"/><br /><br />
                    Secret Pin <br>
                    <input type="text" name="secretpin" value="<?php echo $_SESSION['secretpin']; ?>" autocomplete="off" class="box"/><br /><br />
                    <hr>
                    Password <br>
                    <input type="password" name="password" value="<?php echo $_SESSION['password'] ?>" class="box" /><br/><br />
                    Vafify Password <br>

```

```

                                <input type="password" name="passwordVerify"
value="<?php echo $_SESSION['password'] ?>" class="box" /><br/><br />
                                <input type="submit" name='update' value="Update"
class='submit'/><br />
                                </form>
                            </div>
                        </div>
                    </div>
</body>
</html>

```

newrent.php

```

--
-- Database: `newrent`
--

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
SET time_zone = "+00:00";

--
-- Table structure for table `room_rental_registrations`
--

CREATE TABLE `room_rental_registrations` (
  `id` int(10) UNSIGNED NOT NULL,
  `fullname` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `mobile` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `alternat_mobile` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `email` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `country` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `state` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `city` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `landmark` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `rent` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `sale` varchar(190) COLLATE utf8mb4_unicode_ci DEFAULT NULL,
  `deposit` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `plot_number` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `rooms` varchar(100) COLLATE utf8mb4_unicode_ci DEFAULT NULL,
  `address` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `accommodation` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `description` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,

```

```

`image` varchar(191) COLLATE utf8mb4_unicode_ci DEFAULT NULL,
`open_for_sharing` varchar(191) COLLATE utf8mb4_unicode_ci DEFAULT NULL,
`other` varchar(191) COLLATE utf8mb4_unicode_ci DEFAULT NULL,
`vacant` int(1) NOT NULL DEFAULT '1',
`created_at` timestamp NULL DEFAULT CURRENT_TIMESTAMP,
`updated_at` timestamp NULL DEFAULT CURRENT_TIMESTAMP,
`user_id` int(10) DEFAULT NULL
) ENGINE=MyISAM DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_unicode_ci;

--
-- Dumping data for table `room_rental_registrations`
--

INSERT INTO `room_rental_registrations` (`id`, `fullname`, `mobile`, `alternat_mobile`, `email`,
`country`, `state`, `city`, `landmark`, `rent`, `sale`, `deposit`, `plot_number`, `rooms`, `address`,
`accommodation`, `description`, `image`, `open_for_sharing`, `other`, `vacant`, `created_at`,
`updated_at`, `user_id`) VALUES
(13, 'Ashish Gaikwad', '2345676567', '98888787', 'admin@admin.com', 'india', 'Maharashtra',
'Jalgaon', 'near ramanand police station', '1100', '20000', '5000', '78 nh', '2bhk', 'kolhe nagar,
jalgaon', '4', 'nice house', 'uploads/Jalgao1.jpg', NULL, 'zx', 0, '2022-05-05 12:21:43', '2022-05-05
12:21:43', 1);

-----

--
-- Table structure for table `users`
--

CREATE TABLE `users` (
  `id` int(10) UNSIGNED NOT NULL,
  `fullname` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `mobile` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `username` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `email` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `password` varchar(191) COLLATE utf8mb4_unicode_ci NOT NULL,
  `created_at` timestamp NULL DEFAULT CURRENT_TIMESTAMP,
  `updated_at` timestamp NULL DEFAULT CURRENT_TIMESTAMP,
  `role` varchar(100) COLLATE utf8mb4_unicode_ci DEFAULT 'user',
  `status` int(1) NOT NULL DEFAULT '1'
) ENGINE=MyISAM DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_unicode_ci;

--
-- Dumping data for table `users`

```

```

--

INSERT INTO `users` (`id`, `fullname`, `mobile`, `username`, `email`, `password`, `created_at`,
`updated_at`, `role`, `status`) VALUES
(1, 'Group-7', '9999999999', 'admin', 'admin@admin.com', '21232f297a57a5a743894a0e4a801fc3',
NULL, NULL, 'admin', 1),
(2, 'Ashish Gaikwad', '9090909090', 'ashu', 'ashu@gmail.com',
'89cd279e1dbab7a8518361804a388062', NULL, NULL, 'user', 1);

--

-- Indexes for table `room_rental_registrations`
--
ALTER TABLE `room_rental_registrations`
  ADD PRIMARY KEY (`id`),
  ADD UNIQUE KEY `room_rental_registrations_mobile_unique` (`mobile`),
  ADD UNIQUE KEY `room_rental_registrations_email_unique` (`email`);

--

-- Indexes for table `users`
--
ALTER TABLE `users`
  ADD PRIMARY KEY (`id`),
  ADD UNIQUE KEY `users_email_unique` (`email`),
  ADD UNIQUE KEY `users_mobile_unique` (`mobile`),
  ADD UNIQUE KEY `users_username_unique` (`username`);

--

-- AUTO_INCREMENT for dumped tables
--

--
-- AUTO_INCREMENT for table `room_rental_registrations`
--
ALTER TABLE `room_rental_registrations`
  MODIFY `id` int(10) UNSIGNED NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=16;

--

-- AUTO_INCREMENT for table `users`
--
ALTER TABLE `users`
  MODIFY `id` int(10) UNSIGNED NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=7;

```