

Entity-Relationship Model

Information Management

- A *database* can be modeled as:
 - a collection of entities,
 - relationship among entities.
- An **entity** is an object that exists and is distinguishable from other objects.
 - Example: specific person, company, event, plant
- Entities have **attributes**
 - Example: people have *names* and *addresses*
- An **entity set** is a set of entities of the same type that share the same properties.
 - Example: set of all persons, companies, trees, holidays

Entity Sets *instructor* and *student*

instructor_ID instructor_name

76766	Crick
45565	Katz
10101	Srinivasan
98345	Kim
76543	Singh
22222	Einstein

instructor

student-ID student_name

98988	Tanaka
12345	Shankar
00128	Zhang
76543	Brown
76653	Aoi
23121	Chavez
44553	Peltier

student

Relationship Sets

- A **relationship** is an association among several entities

Example:

44553 (Peltier) advisor 22222 (Einstein)
student entity relationship set *instructor* entity

- A **relationship set** is a mathematical relation among $n \geq 2$ entities, each taken from entity sets


$$\{(e_1, e_2, \dots, e_n) \mid e_1 \in E_1, e_2 \in E_2, \dots, e_n \in E_n\}$$

where (e_1, e_2, \dots, e_n) is a relationship

- Example:


$$(44553, 22222) \in \text{advisor}$$

Relationship Set *advisor*

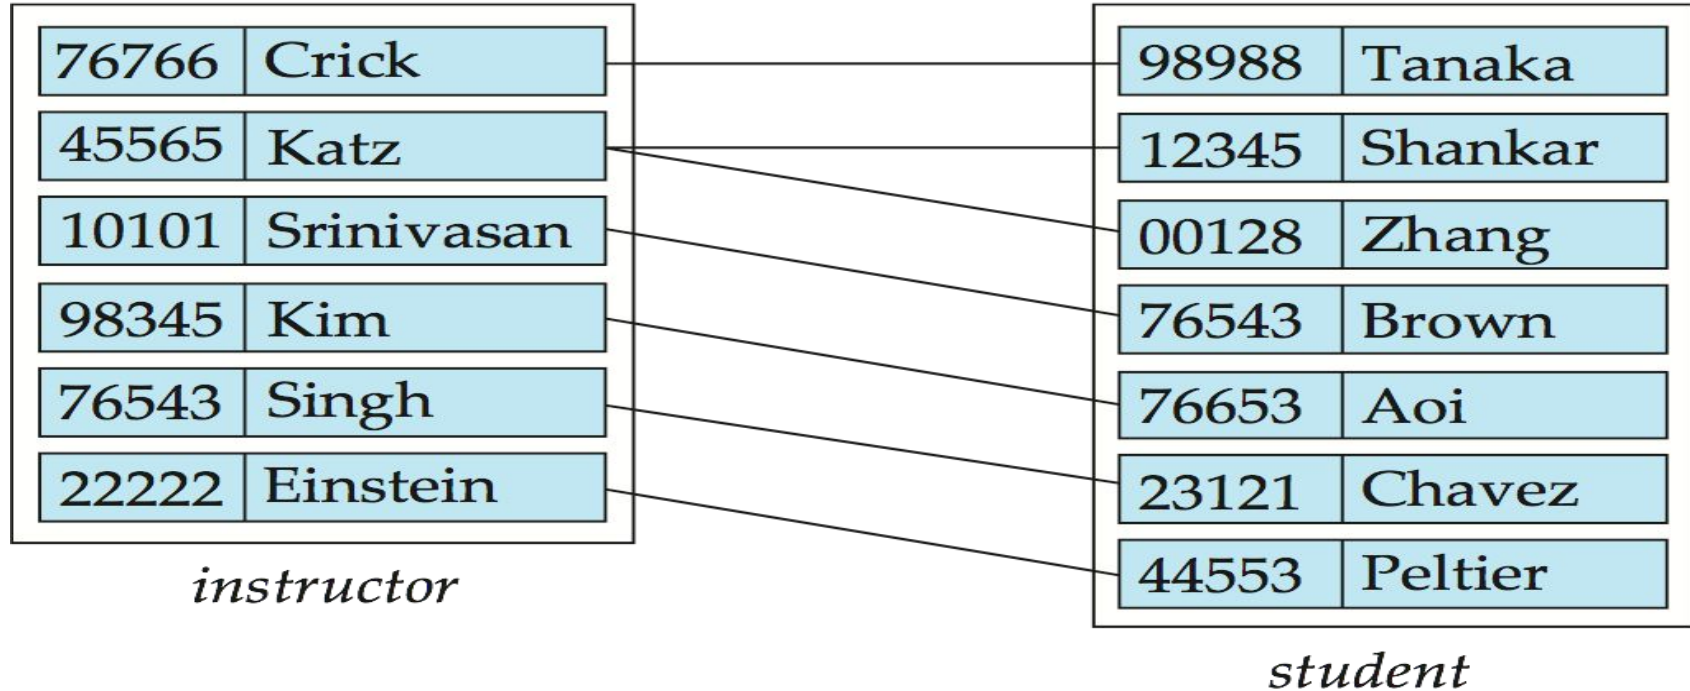

Relationship Sets

- An **attribute** can also be property of a relationship set.
- For instance, the *advisor* relationship set between entity sets *instructor* and *student* may have the attribute *date* which tracks when the student started being associated with the advisor

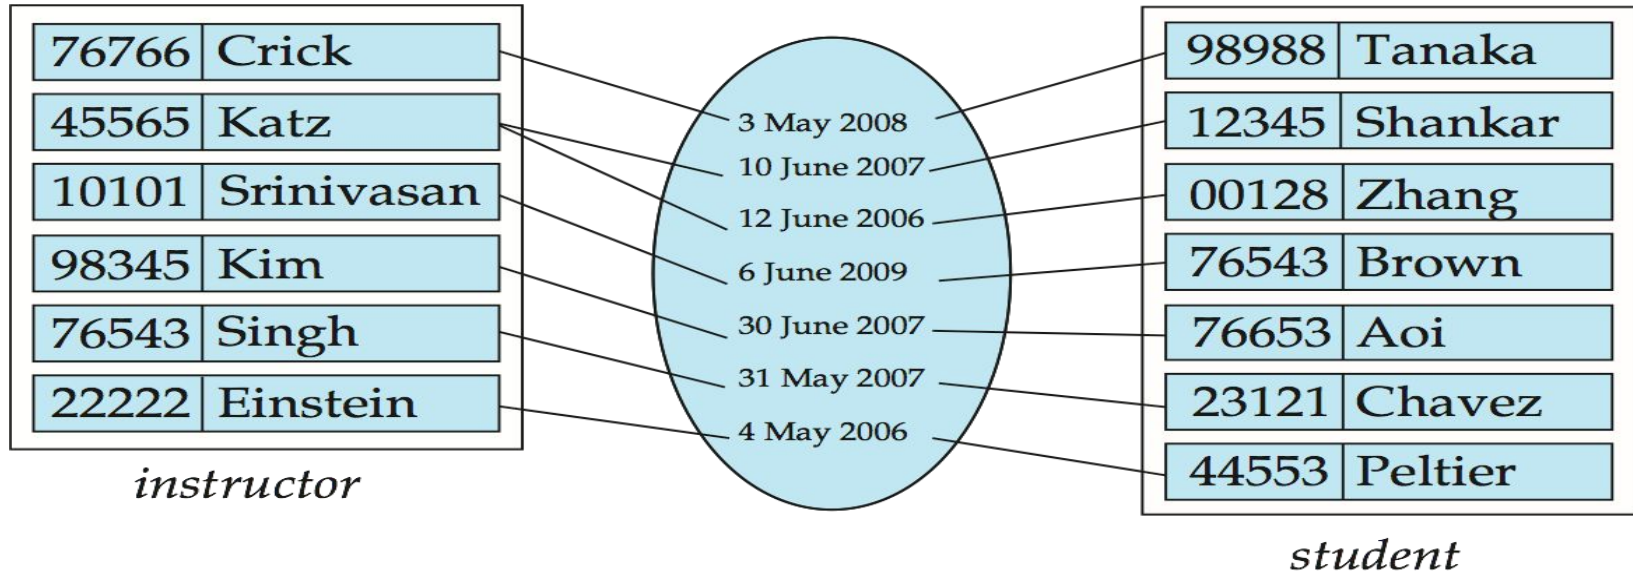

- **binary relationship**
 - involve two entity sets (or degree two).
 - most relationship sets in a database system are binary.
- Relationships between more than two entity sets are rare. Most relationships are binary.
 - Example: *students* work on research *projects* under the guidance of an *instructor*.
 - relationship *proj_guide* is a ternary relationship between *instructor*, *student*, and *project*

- An entity is represented by a set of attributes, that is descriptive properties possessed by all members of an entity set.

- Example:


instructor = (ID, name, street, city, salary)
course = (course_id, title, credits)

- **Domain** – the set of permitted values for each attribute
- Attribute types:
 - **Simple** and **composite** attributes.
 - **Single-valued** and **multivalued** attributes
 - 4 Example: multivalued attribute: *phone_numbers*
 - **Derived** attributes
 - 4 Can be computed from other attributes
 - 4 Example: age, given date_of_birth


Composite Attributes

COLLEGE OF
COMPUTER
STUDIES

composite
attributes

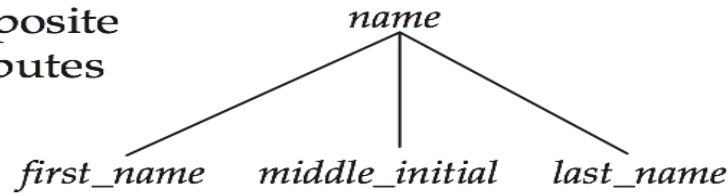


component
attributes

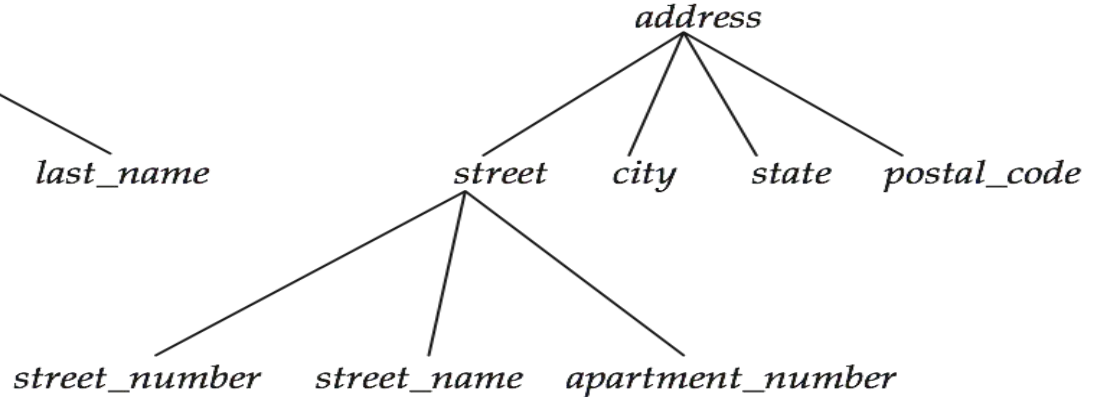


Mapping Cardinality Constraints

- Express the number of entities to which another entity can be associated via a relationship set.
- Most useful in describing binary relationship sets.
- For a binary relationship set the mapping cardinality must be one of the following types:
 - One to one
 - One to many
 - Many to one
 - Many to many

Mapping Cardinalities

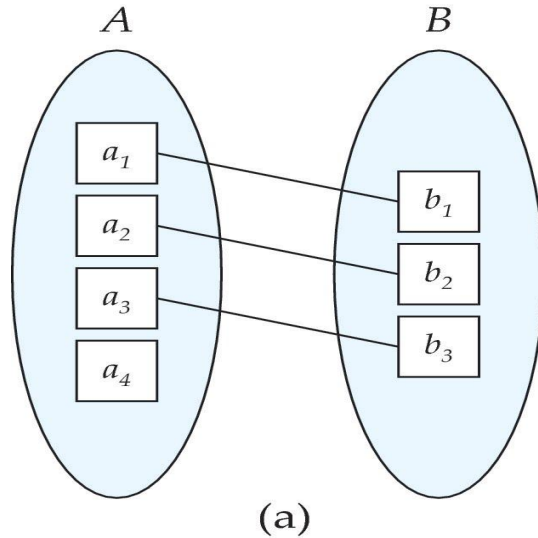


One to one

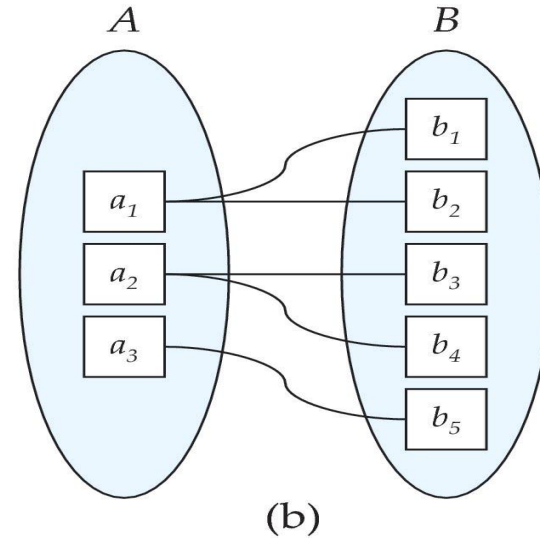

One to many


Note: Some elements in A and B may not be mapped to any elements in the other set

Mapping Cardinalities

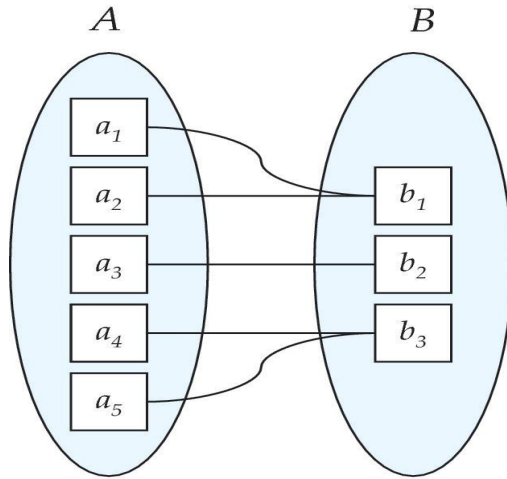

(a)

Many to
one

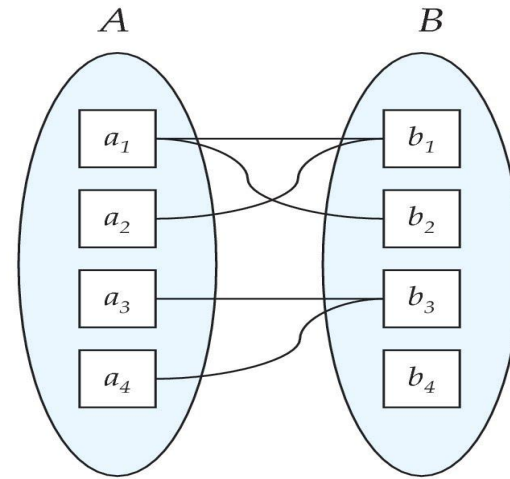

(b)

Many to
many

Note: Some elements in A and B may not be mapped to any elements in the other set


Keys

- A **super key** of an entity set is a set of one or more attributes whose values uniquely determine each entity.
- A **candidate key** of an entity set is a minimal super key
 - *ID* is candidate key of *instructor*
 - *course_id* is candidate key of *course*
- Although several candidate keys may exist, one of the candidate keys is selected to be the **primary key**.

- The combination of primary keys of the participating entity sets forms a super key of a relationship set.
 - (s_id, i_id) is the super key of *advisor*
 - *NOTE: this means **a pair of entity sets can have at most one relationship in a particular relationship set.***
 - 4 Example: if we wish to track multiple meeting dates between a student and her advisor, we cannot assume a relationship for each meeting. We can use a multivalued attribute though
- Must consider the mapping cardinality of the relationship set when deciding what are the candidate keys
- Need to consider semantics of relationship set in selecting the *primary key* in case of more than one candidate key

- Suppose we have entity sets
 - *instructor*, with attributes including *dept_name*
 - *department*and a relationship
 - *inst_dept* relating *instructor* and *department*
- Attribute *dept_name* in entity *instructor* is redundant since there is an explicit relationship *inst_dept* which relates instructors to departments
 - The attribute replicates information present in the relationship, and should be removed from *instructor*
 - BUT: when converting back to tables, in some cases the attribute gets reintroduced, as we will see.


E-R Diagrams

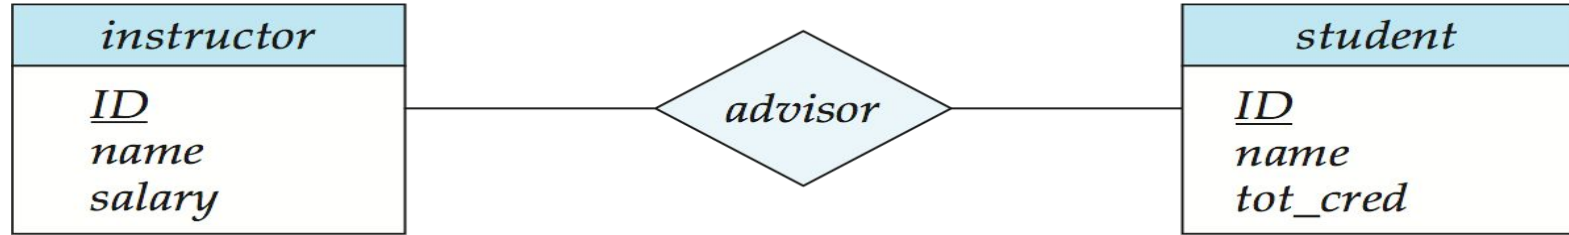

- Rectangles represent entity sets.
- Diamonds represent relationship sets.
- Attributes listed inside entity rectangle
- Underline indicates primary key attributes


Entity With Composite, Multivalued, and Derived Attributes

VIT COLLEGE OF
COMPUTER
STUDIES

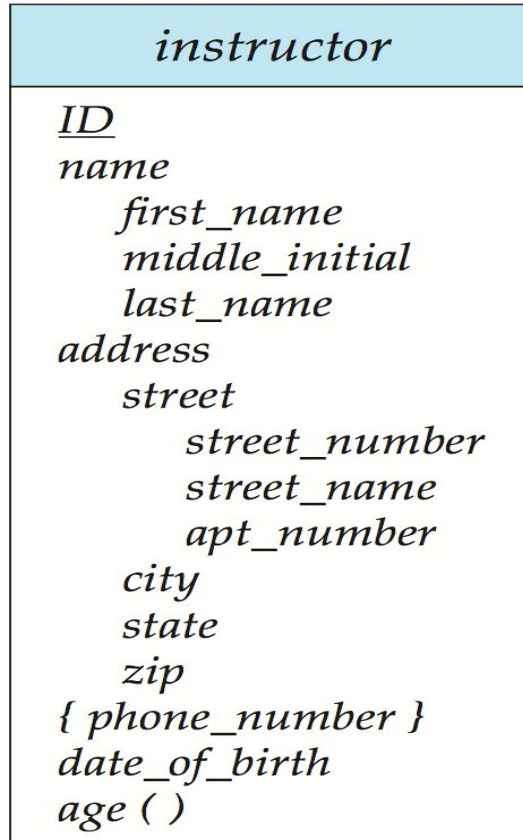

Relationship Sets with Attributes

COLLEGE OF
COMPUTER
STUDIES

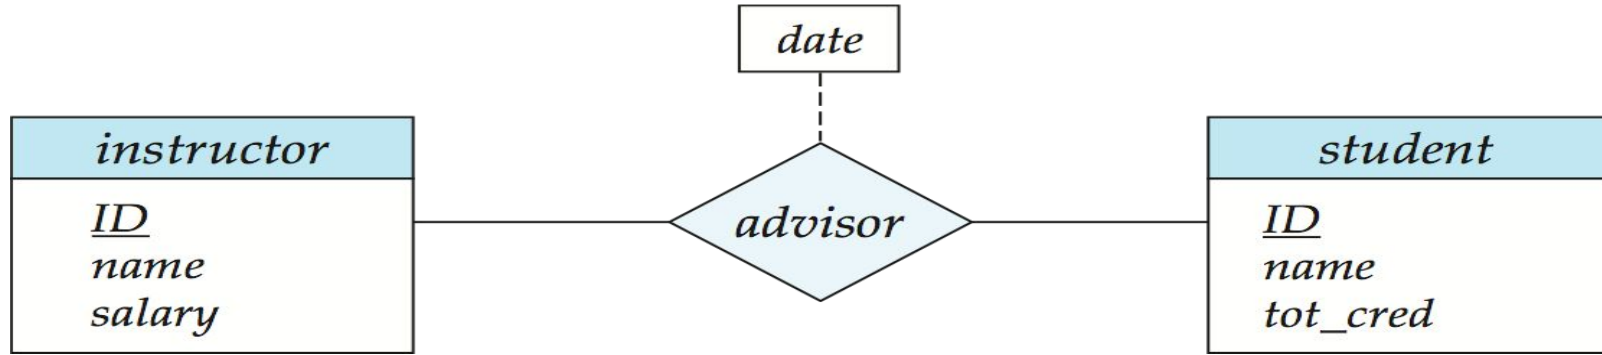

Cardinality Constraints

- We express cardinality constraints by drawing either a directed line (\rightarrow), signifying “one,” or an undirected line ($-$), signifying “many,” between the relationship set and the entity set.
- One-to-one relationship:
 - A student is associated with at most one *instructor* via the relationship *advisor*
 - A *student* is associated with at most one *department* via *stud_dept*


One-to-One Relationship

- one-to-one relationship between an *instructor* and a *student*
 - an instructor is associated with at most one student via *advisor*
 - and a student is associated with at most one instructor via *advisor*




One-to-Many Relationship

- one-to-many relationship between an *instructor* and a *student*
 - an instructor is associated with several (including 0) students via *advisor*
 - a student is associated with at most one instructor via advisor,

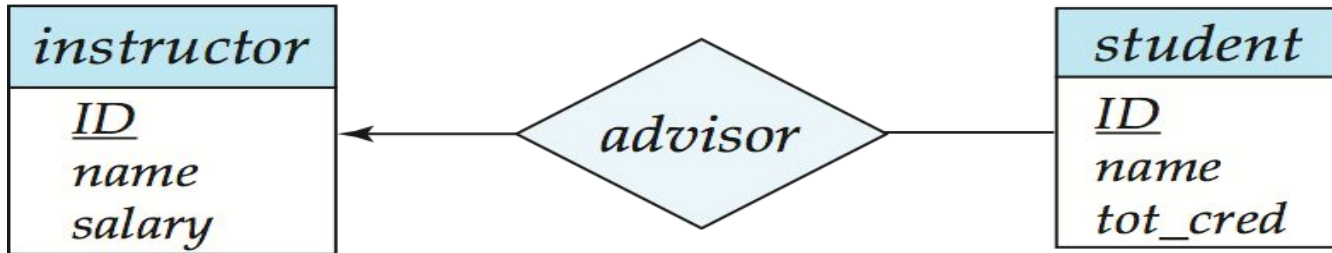

Many-to-One Relationships

- In a many-to-one relationship between an *instructor* and a *student*,
 - an instructor is associated with at most one student via *advisor*,
 - and a student is associated with several (including 0) instructors via *advisor*

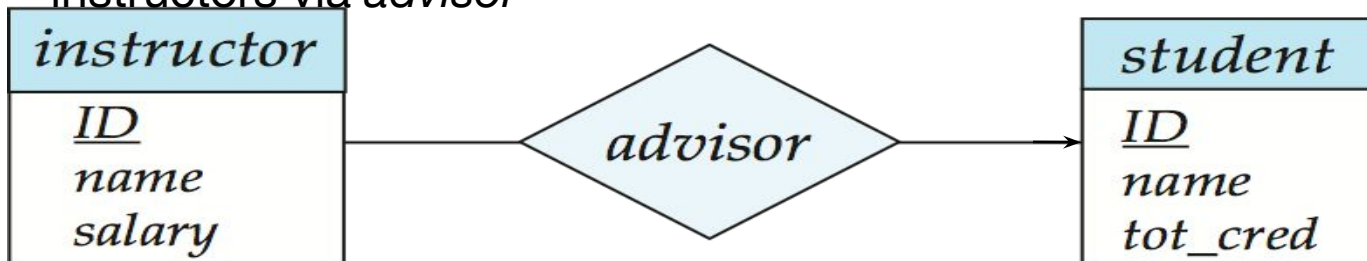

Many-to-Many Relationship

- An instructor is associated with several (possibly 0) students via *advisor*
- A student is associated with several (possibly 0) instructors via *advisor*

