

# SERVICIOS DE RED




UNIVERSIDAD  
**POLITÉCNICA**  
DE QUINTANA ROO

Formando Triunfadores

GRUPO: 27BV

NOMBRE: Roque Saul Yam Raygoza

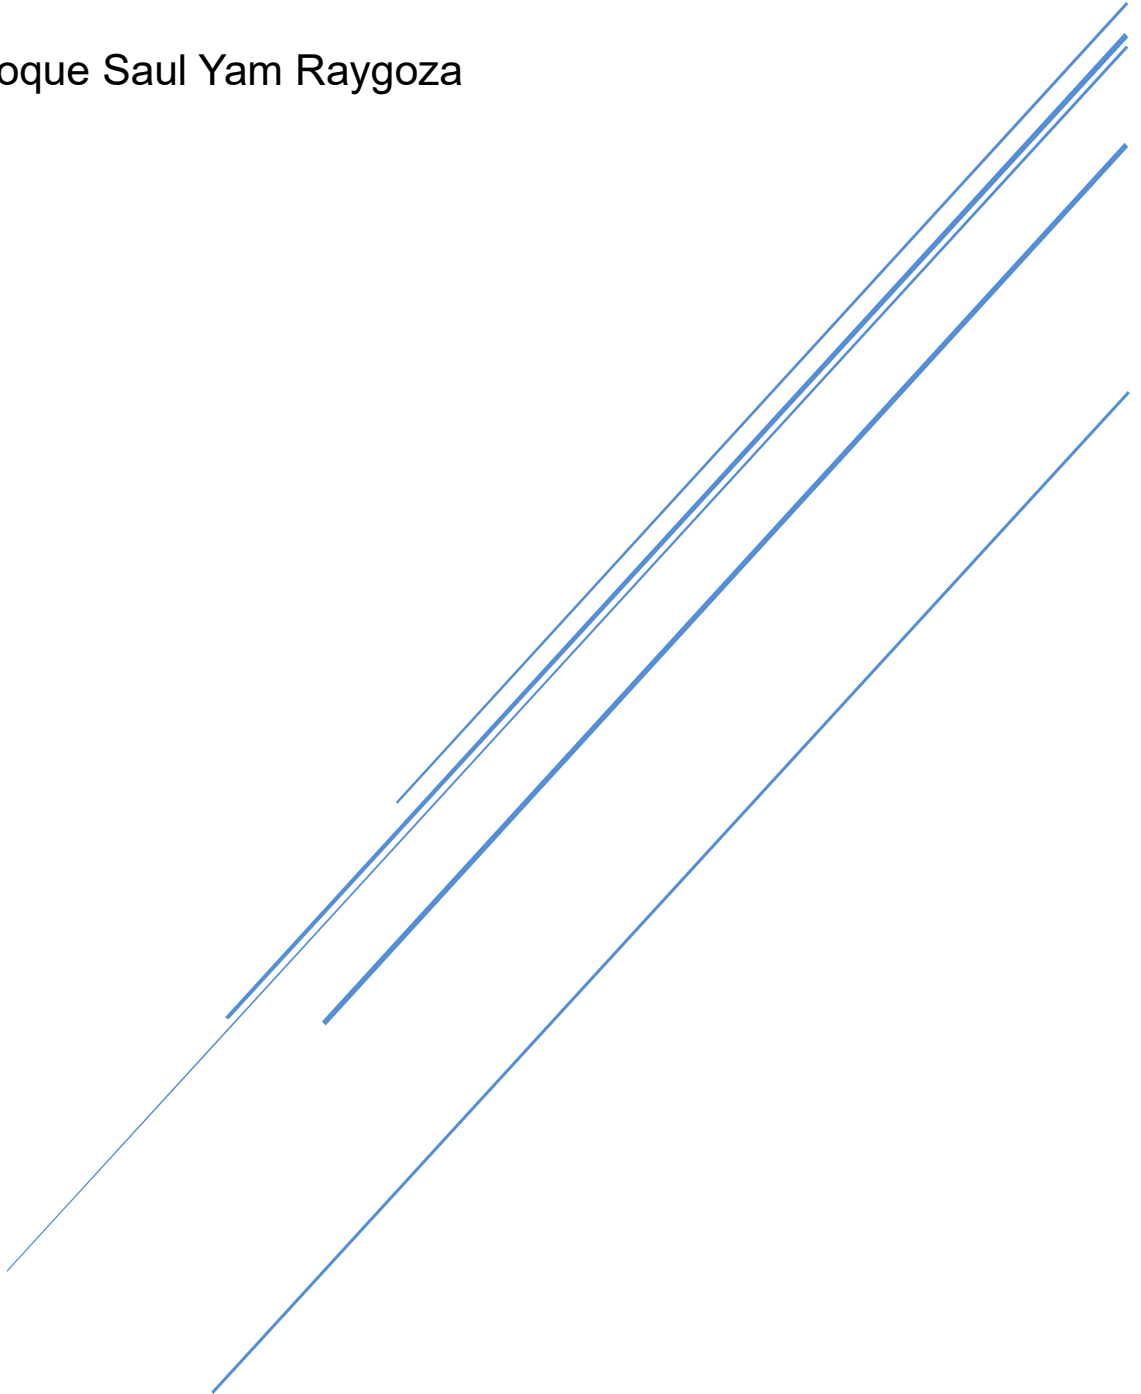

## 1. APACHE

```
(root@Roque)-[~]
# systemctl status apache2
o apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; disabled; preset:>
   Active: inactive (dead)
   Docs: https://httpd.apache.org/docs/2.4/
lines 1-4/4 (END) ... skipping ...
o apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; disabled; preset: disabled)
   Active: inactive (dead)
   Docs: https://httpd.apache.org/docs/2.4/
```

## 2. BASE DE DATOS – MARIA DB

```
(root@Roque)-[~]
# systemctl status mariadb
● mariadb.service - MariaDB 10.11.5 database server
   Loaded: loaded (/lib/systemd/system/mariadb.service; enabled; preset:>
   Active: active (running) since Wed 2023-12-06 10:50:28 CST; 10min ago
   Docs: man:mariadb(8)
         https://mariadb.com/kb/en/library/systemd/
   Main PID: 144613 (mariabdd)
   Status: "Taking your SQL requests now ..."
   Tasks: 8 (limit: 2262)
   Memory: 237.0M
   CPU: 1.373s
   CGroup: /system.slice/mariadb.service
           └─144613 /usr/sbin/mariabdd

Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] Plugin>
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] InnoDB>
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Warning] Yo>
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] InnoDB>
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] Serve>
Dec 06 10:50:28 Roque mariabdd[144613]: 2023-12-06 10:50:28 0 [Note] /usr/>
Dec 06 10:50:28 Roque mariabdd[144613]: Version: '10.11.5-MariaDB-3' sock>
Dec 06 10:50:28 Roque systemd[1]: Started mariadb.service - MariaDB 10.11.>
Dec 06 10:50:28 Roque /etc/mysql/debian-start[144655]: Checking for insecu>
lines 1-22 ... skipping ...
● mariadb.service - MariaDB 10.11.5 database server
   Loaded: loaded (/lib/systemd/system/mariadb.service; enabled; preset: disabled)
   Active: active (running) since Wed 2023-12-06 10:50:28 CST; 10min ago
   Docs: man:mariadb(8)
         https://mariadb.com/kb/en/library/systemd/
   Main PID: 144613 (mariabdd)
   Status: "Taking your SQL requests now ..."
   Tasks: 8 (limit: 2262)
   Memory: 237.0M
   CPU: 1.373s
   CGroup: /system.slice/mariadb.service
           └─144613 /usr/sbin/mariabdd

Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] Plugin 'FEEDBACK' is disabled.
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] InnoDB: Loading buffer pool(s) from /var/lib/mysql/ib_buffer_pool
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Warning] You need to use --log-bin to make --expire-logs-days or --binlog-expire-logs-seconds work.
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] InnoDB: Buffer pool(s) load completed at 231206 10:50:27
Dec 06 10:50:27 Roque mariabdd[144613]: 2023-12-06 10:50:27 0 [Note] Server socket created on IP: '127.0.0.1'.
Dec 06 10:50:28 Roque mariabdd[144613]: 2023-12-06 10:50:28 0 [Note] /usr/sbin/mariabdd: ready for connections.
Dec 06 10:50:28 Roque mariabdd[144613]: Version: '10.11.5-MariaDB-3' socket: '/run/mysqld/mysqld.sock' port: 3306 Debian n/a
Dec 06 10:50:28 Roque systemd[1]: Started mariadb.service - MariaDB 10.11.5 database server.
Dec 06 10:50:28 Roque /etc/mysql/debian-start[144655]: Checking for insecure root accounts.
Dec 06 10:50:28 Roque /etc/mysql/debian-start[144659]: Triggering myisam-recover for all MyISAM tables and aria-recover for all Aria tables
```

### 3. SQUID

```
(root@Roque)-[~]
# systemctl status squid
● squid.service - Squid Web Proxy Server
   Loaded: loaded (/lib/systemd/system/squid.service; disabled; preset: >
   Active: active (running) since Wed 2023-12-06 11:15:45 CST; 2min 1s a>
     Docs: man:squid(8)
   Process: 161408 ExecStartPre=/usr/sbin/squid --foreground -z (code=exi>
  Main PID: 161412 (squid)
    Tasks: 4 (limit: 2262)
   Memory: 16.4M
      CPU: 181ms
   CGroup: /system.slice/squid.service
           └─161412 /usr/sbin/squid --foreground -sYC
             └─161415 "(squid-1)" --kid squid-1 --foreground -sYC
               └─161416 "(logfile-daemon)" /var/log/squid/access.log
                 └─161417 "(pinger)"

Dec 06 11:15:45 Roque squid[161415]: Using Least Load store dir selection
Dec 06 11:15:45 Roque squid[161415]: Set Current Directory to /var/spool/s>
Dec 06 11:15:45 Roque squid[161415]: Finished loading MIME types and icons.
Dec 06 11:15:45 Roque squid[161415]: HTCP Disabled.
Dec 06 11:15:45 Roque squid[161415]: Pinger socket opened on FD 14
Dec 06 11:15:45 Roque squid[161415]: Squid plugin modules loaded: 0
Dec 06 11:15:45 Roque squid[161415]: Adaptation support is off.
lines 1-22 ... skipping ...
● squid.service - Squid Web Proxy Server
   Loaded: loaded (/lib/systemd/system/squid.service; disabled; preset: disabled)
   Active: active (running) since Wed 2023-12-06 11:15:45 CST; 2min 1s ago
     Docs: man:squid(8)
   Process: 161408 ExecStartPre=/usr/sbin/squid --foreground -z (code=exited, status=0/SUCCESS)
  Main PID: 161412 (squid)
    Tasks: 4 (limit: 2262)
   Memory: 16.4M
      CPU: 181ms
   CGroup: /system.slice/squid.service
           └─161412 /usr/sbin/squid --foreground -sYC
             └─161415 "(squid-1)" --kid squid-1 --foreground -sYC
               └─161416 "(logfile-daemon)" /var/log/squid/access.log
                 └─161417 "(pinger)"

Dec 06 11:15:45 Roque squid[161415]: Using Least Load store dir selection
Dec 06 11:15:45 Roque squid[161415]: Set Current Directory to /var/spool/squid
Dec 06 11:15:45 Roque squid[161415]: Finished loading MIME types and icons.
Dec 06 11:15:45 Roque squid[161415]: HTCP Disabled.
Dec 06 11:15:45 Roque squid[161415]: Pinger socket opened on FD 14
Dec 06 11:15:45 Roque squid[161415]: Squid plugin modules loaded: 0
Dec 06 11:15:45 Roque squid[161415]: Adaptation support is off.
Dec 06 11:15:45 Roque squid[161415]: Accepting HTTP Socket connections at conn3 local=[::]:3128 remote=[::] FD 12 flags=9
```

### 4. OPENVPN

```
(root@Roque)-[~]
# systemctl status openvpn
o openvpn.service - OpenVPN service
   Loaded: loaded (/lib/systemd/system/openvpn.service; disabled; preset>
   Active: inactive (dead)
     Docs: man:openvpn(8)
lines 1-4/4 (END) ... skipping ...
o openvpn.service - OpenVPN service
   Loaded: loaded (/lib/systemd/system/openvpn.service; disabled; preset: disabled)
   Active: inactive (dead)
     Docs: man:openvpn(8)
~
~
```

### 5. VSFTPD

```
(root@Roque)-[~]
# systemctl status vsftpd
o vsftpd.service - vsftpd FTP server
   Loaded: loaded (/lib/systemd/system/vsftpd.service; disabled; preset:>
   Active: inactive (dead)
lines 1-3/3 (END) ... skipping ...
o vsftpd.service - vsftpd FTP server
   Loaded: loaded (/lib/systemd/system/vsftpd.service; disabled; preset: disabled)
   Active: inactive (dead)
~
```