Table des matières

Création Base de Donnée MYSQL 1
Installation de PHP 2
Configuration de NGINX 3
Installation d'un certificat auto-signé 4
Installation phpMyAdmin 4
Reconfiguration de phpMyAdmin 6

Création Base de Donnée MYSQL

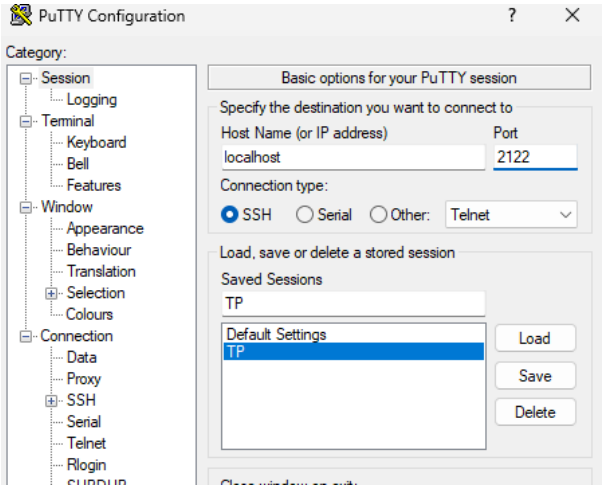

- Créer une base de données en respectant les prérequis de WordPress !

  A faire

```
CREATE DATABASE wordpress;
CREATE USER 'wp_user'@'%' IDENTIFIED BY 'carriat';

 IDENTIFIED BY "password";
 FLUSH PRIVILEGES;

mysql> EXIT
```

Installation de l'application

```
MariaDB [(none)]> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
| wordpress          |
+--------------------+
```

apt-get install zip unzip

wget https://wordpress.org/latest.zip

chown -R www-data:www-data /var/www/html/wordpress/wordpress/

```
root@WP1:/var/www/html/wordpress# ls -la
total 27900
drwxrwxr-x 3 root     root         4096 21 nov.  13:39 .
drwxr-xr-x 3 root     root         4096 21 nov.  13:35 ..
-rw-rw-r-- 1 carriat  carriat  28556107 30 sept. 20:07 latest.zip
drwxr-xr-x 5 www-data www-data     4096 21 nov.  13:53 wordpress
root@WP1:/var/www/html/wordpress#
```

```
define( 'DB_USER', 'wp_user' );

/** Database password */
define( 'DB_PASSWORD', 'carriat' );

/** Database hostname */
define( 'DB_HOST', '192.168.160.31' );

/** Database charset to use in creating database tables. */
define( 'DB_CHARSET', 'utf8' );

/** The database collate type. Don't change this if in doubt. */
define( 'DB_COLLATE', '' );

/**#@+
```

Installation de PHP

root@wp1:~# apt install php php-curl php-fpm php-bcmath php-gd php-soap php-zip php-curl php-mbstring php-mysqlnd php-gd php-xml php-intl php-zip

root@wp1:~# php -v

```
NEXT STEPS:
- This certificate will not be renewed automatically. Autorenewal of --manual
ot command before the certificate's expiry date.

- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -
If you like Certbot, please consider supporting our work by:
 * Donating to ISRG / Let's Encrypt:   https://letsencrypt.org/donate
 * Donating to EFF:                    https://eff.org/donate-le
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -
root@Frontl:~#
```

Configuration de NGINX

```
root /var/www/html/wordpress/wordpress ;

# Add index.php to the list if you are using PHP
index index.html index.htm index.nginx-debian.html index.php;

server_name _;

location / {
        # First attempt to serve request as file, then
        # as directory, then fall back to displaying a 404.
        try_files $uri $uri/ =404;
}

# pass PHP scripts to FastCGI server
#
location ~ \.php$ {
        include snippets/fastcgi-php.conf;
#
#       # With php-fpm (or other unix sockets):
        fastcgi_pass unix:/run/php/php7.4-fpm.sock;
        include fastcgi_params ;
        # With php-cgi (or other tcp sockets):
#       fastcgi_pass 127.0.0.1:9000;
}

# deny access to .htaccess files, if Apache's document root
# concurs with nginx's one
#
#location ~ /\.ht {
#       deny all;
#}
```

Installation d'un certificat auto-signé

root@front:/etc/nginx/sites-available# mkdir /etc/nginx/ssl

pour générer la clé auto signe

root@front:/etc/nginx/sites-available# openssl req -x509 -nodes -days 3000 -newkey rsa:2048 -keyout /etc/nginx/ssl/front.tp.labo.key -out /etc/nginx/ssl/front.tp.labo.crt

_acme-challenge.etu02.sio-carriat.com	qMQM7-pPOUh-inB80xSmTigME_eFSFOgsDlyUe2Zf_g

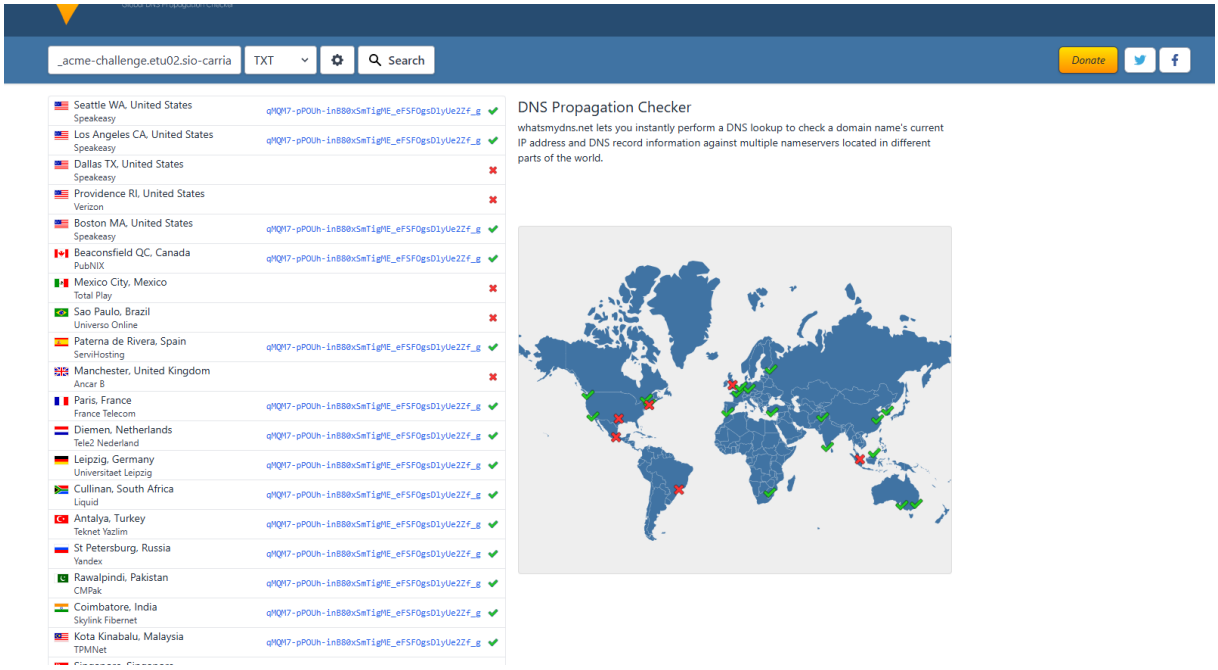

Installation phpMyAdmin

root@front:~# apt install phpmyadmin

root@front:~# apt install php-fpm php-mbstring php-bcmath php-xml php-mysql php-common php-gd php-cli php-curl php-zip php-gd

Installation de l'application

Rien cocher

root@front:~# cp /usr/share/phpmyadmin/config.sample.inc.php /usr/share/phpmyadmin/config.inc.php

root@front:~# nano /usr/share/phpmyadmin/config.inc.php

Puis dans front :

nano /etc/phpmyadmin/config.inc.php

Rajouter :

$cfg['Servers'][$i]['verbose'] = 'BDD1';
$cfg['Servers'][$i]['host'] = '192.168.160.31';

Enfin front :

ln-s /usr/share/phpmyadmin /var/www/html/phpmyadmin

chown -R www-data:www-data /var/www/html/phpmyadmin

créer le fichier /etc/nginx/sites-availables/phpmyadmin.conf

puis dans phpmyadmin rajouter :

```
server {
        listen          4443 ssl;
        server_name front.tp.labo;
        ssl_certificate /etc/letsencrypt/live/etu02.sio-carriat.com/fullchain.pem;
        ssl_certificate_key /etc/letsencrypt/live/etu02.sio-carriat.com/privkey.pem;
location /phpmyadmin {
    root /usr/share/;
    index index.php index.html index.htm;
}
    location ~ ^/phpmyadmin/(.+.php)$ {
        try_files $uri =404;
        root /usr/share/;
```

```
        fastcgi_pass unix:/run/php/php8.4-fpm.sock;
        fastcgi_index index.php;
        fastcgi_param SCRIPT_FILENAME $document_root$fastcgi_script_name;
        include /etc/nginx/fastcgi_params;
    }
    location ~* ^/phpmyadmin/(.+.(jpg|jpeg|gif|css|png|js|ico|html|xml|txt))$ {
        root /usr/share/;
    }
}
```

Ensuite :

#dpkg-reconfigure phpmyadmin

Reconfiguration de phpMyAdmin

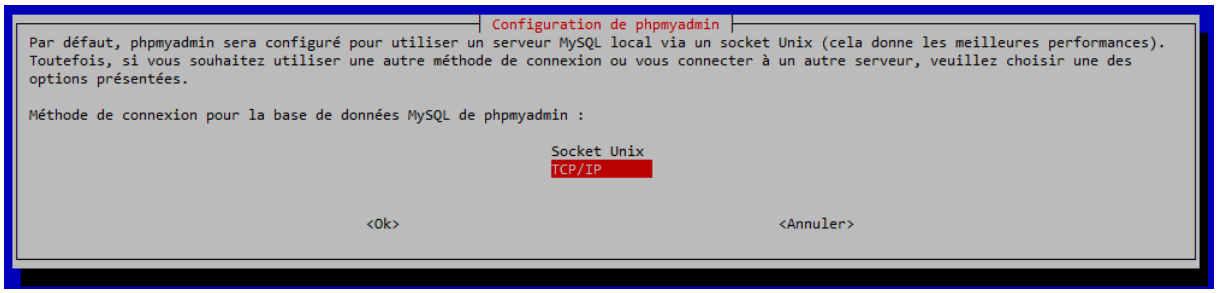

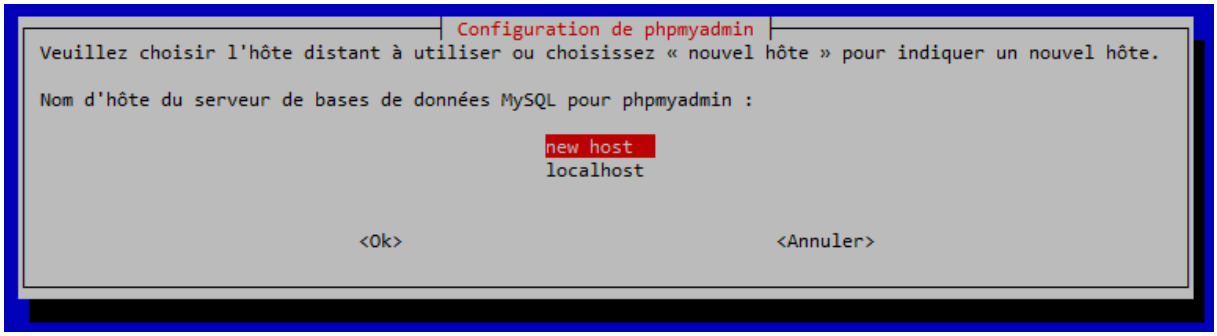

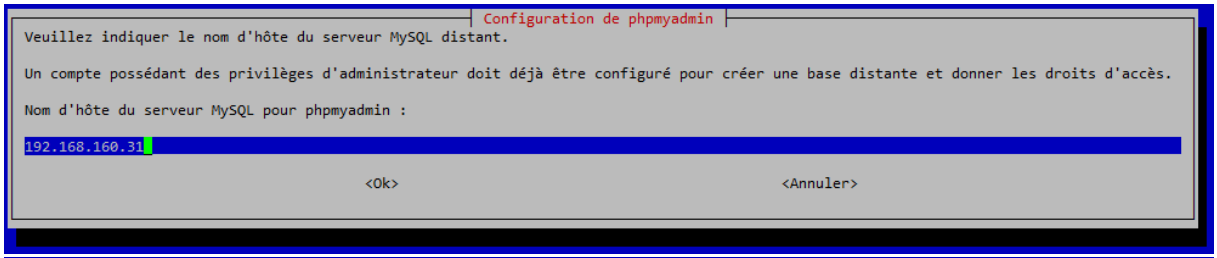

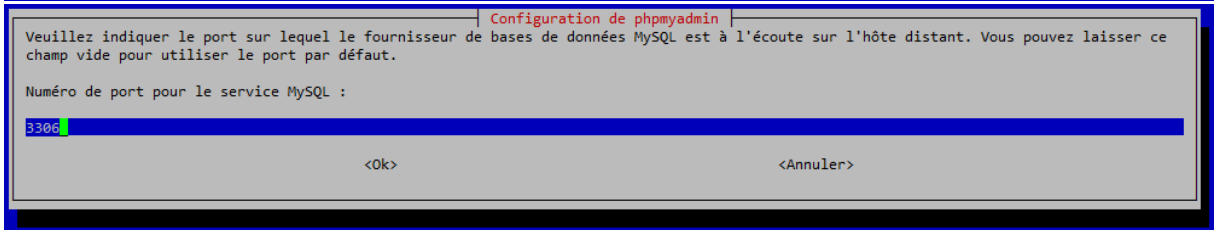

Installation de l'application

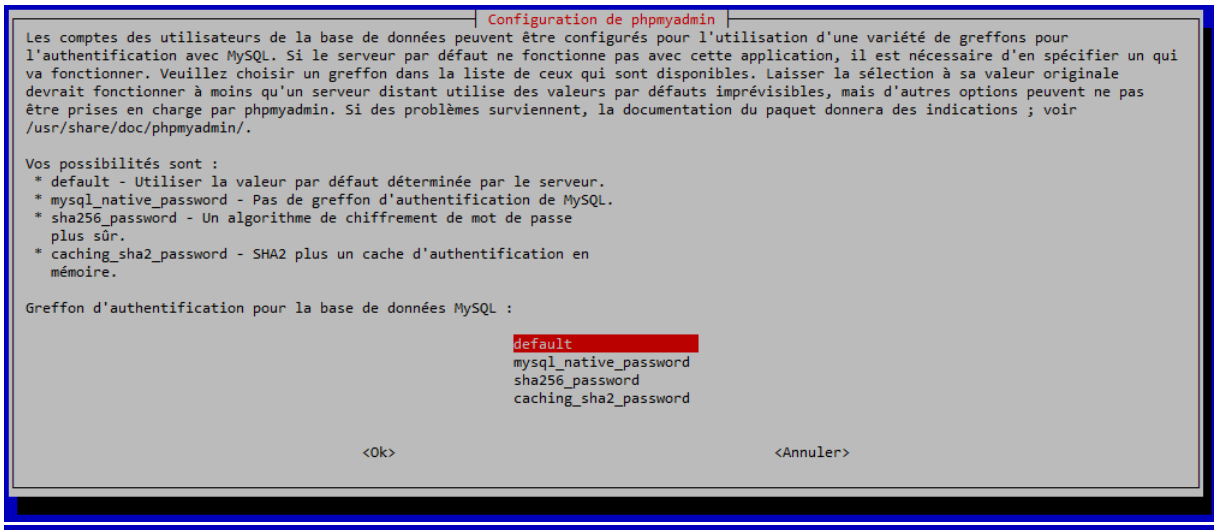

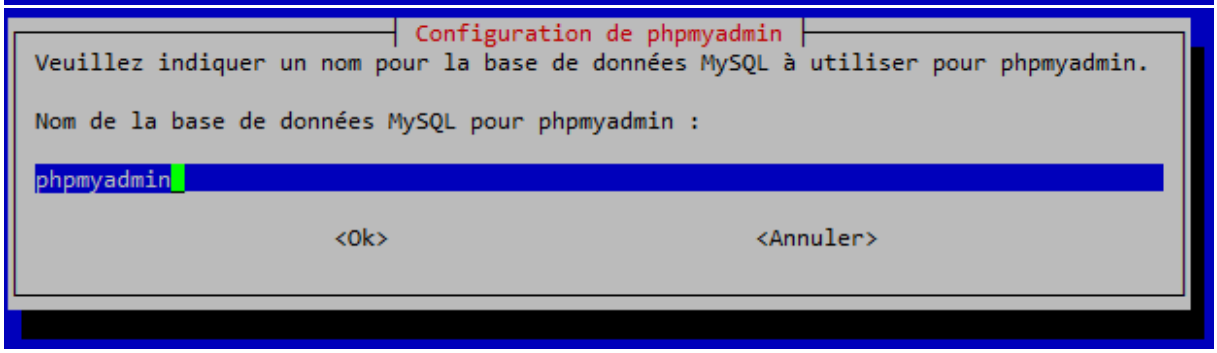

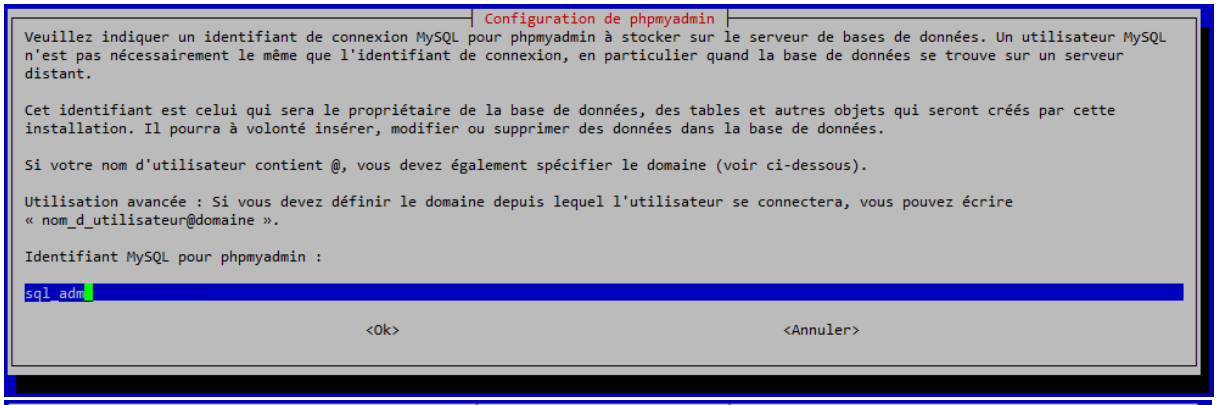

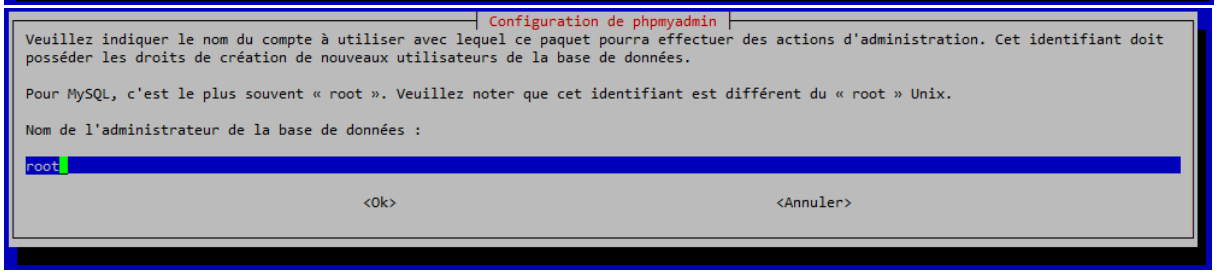

Installation de l'application

Enfin la page phpMyAdmin fonctionne