

How to start and stop web logic server?


Q. How to start weblogic server?

- 1) If you are on windows operating system.
To start WebLogic server we need to run **"startWebLogic.cmd"** on command prompt
- 2) If you are on Linux operating system.
To start WebLogic server we need to run **startWebLogic.sh** file on terminal

Q. Where weblogic start up file located?

C:\oracle\oracle_home\user_projects\domains\rrd_domain

user created domain name

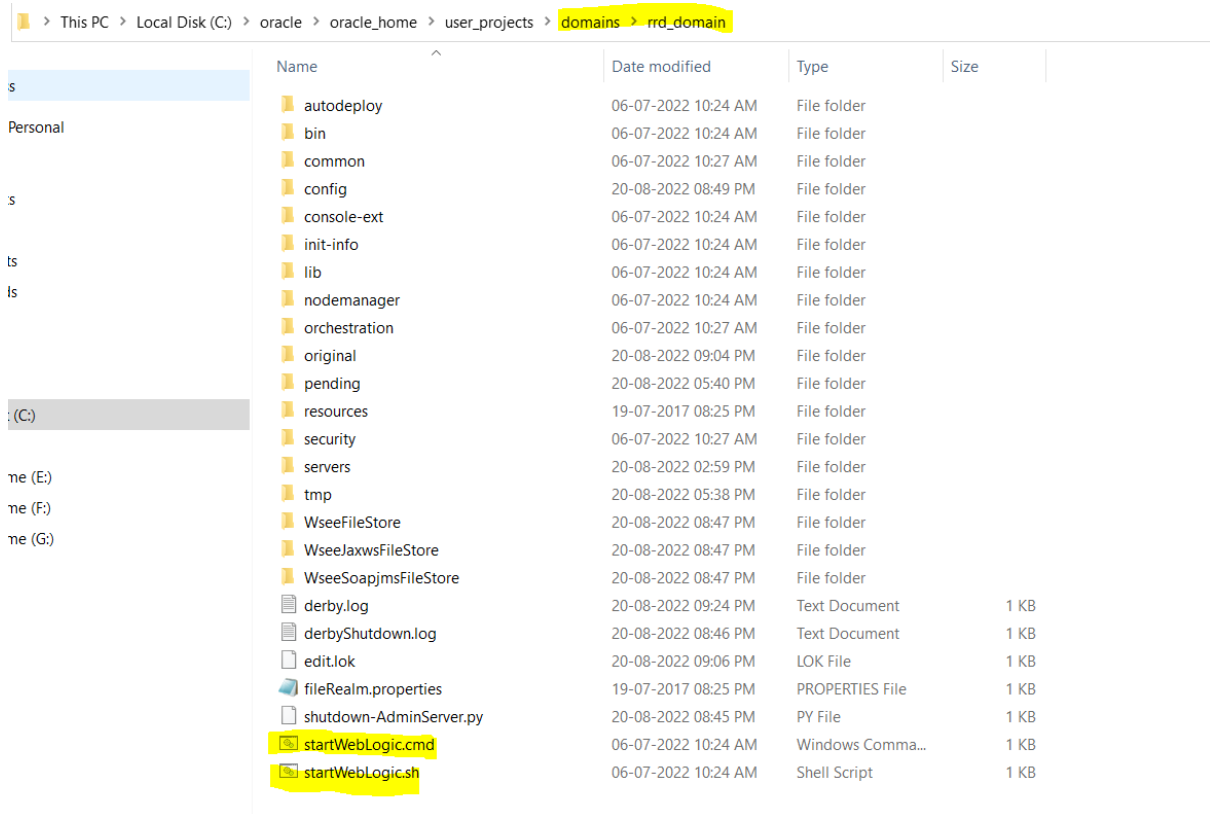

| Name | Date modified | Type | Size |
|-------------------------|---------------------|------------------|------|
| autodeploy | 06-07-2022 10:24 AM | File folder | |
| bin | 06-07-2022 10:24 AM | File folder | |
| common | 06-07-2022 10:27 AM | File folder | |
| config | 20-08-2022 08:49 PM | File folder | |
| console-ext | 06-07-2022 10:24 AM | File folder | |
| init-info | 06-07-2022 10:24 AM | File folder | |
| lib | 06-07-2022 10:24 AM | File folder | |
| nodemanager | 06-07-2022 10:24 AM | File folder | |
| orchestration | 06-07-2022 10:27 AM | File folder | |
| original | 20-08-2022 09:04 PM | File folder | |
| pending | 20-08-2022 05:40 PM | File folder | |
| resources | 19-07-2017 08:25 PM | File folder | |
| security | 06-07-2022 10:27 AM | File folder | |
| servers | 20-08-2022 02:59 PM | File folder | |
| tmp | 20-08-2022 05:38 PM | File folder | |
| WseeFileStore | 20-08-2022 08:47 PM | File folder | |
| WseeJaxwsFileStore | 20-08-2022 08:47 PM | File folder | |
| WseeSoapjmsFileStore | 20-08-2022 08:47 PM | File folder | |
| derby.log | 20-08-2022 09:24 PM | Text Document | 1 KB |
| derbyShutdown.log | 20-08-2022 08:46 PM | Text Document | 1 KB |
| edit.lok | 20-08-2022 09:06 PM | LOK File | 1 KB |
| fileRealm.properties | 19-07-2017 08:25 PM | PROPERTIES File | 1 KB |
| shutdown-AdminServer.py | 20-08-2022 08:45 PM | PY File | 1 KB |
| startWebLogic.cmd | 06-07-2022 10:24 AM | Windows Comma... | 1 KB |
| startWebLogic.sh | 06-07-2022 10:24 AM | Shell Script | 1 KB |

Open command prompt at this location as below

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19044.1889]
(c) Microsoft Corporation. All rights reserved.

C:\oracle\oracle_home\user_projects\domains\rrd_domain>startWebLogic.cmd
```

File name and press Enter

Q> How to stop WebLogic Server?

- 1) We are on windows operating system then we need to run "stopWebLogic.cmd" file on command prompt
- 2) If we are on linux operating system then we need to run "stopWebLogic.sh" file on terminal

Q> Location of "stopWebLogic.cmd" and "stopWebLogic.sh" file

These files are present in bin directory of user domain directory as below

C:\oracle\oracle_home\user_projects\domains\rrd_domain\bin

This path may be different from
system system

user created domain path

> This PC > Local Disk (C:) > oracle > oracle_home > user_projects > domains > rrd_domain > bin

| | | | | |
|--|-------------------------|---------------------|------------------|------|
| | stopNodeManager.cmd | 06-07-2022 10:24 AM | Windows Comma... | 2 KB |
| | stopNodeManager.sh | 06-07-2022 10:24 AM | Shell Script | 2 KB |
| | stopRSDaemon.cmd | 06-07-2022 10:24 AM | Windows Comma... | 1 KB |
| | stopRSDaemon.sh | 06-07-2022 10:24 AM | Shell Script | 1 KB |
| | stopWebLogic.cmd | 06-07-2022 10:24 AM | Windows Comma... | 3 KB |
| | stopWebLogic.sh | 06-07-2022 10:24 AM | Shell Script | 3 KB |
| | uninstallNodeMgrSvc.cmd | 06-07-2022 10:24 AM | Windows Comma... | 1 KB |

Once server started how to Login AdminServer Console

To Login Admin server console use below url

<http://localhost:7001/console>

as below

