

WebLogic Server download steps

Step 1: Create an account on Oracle if not

Create Your Oracle Account

Already have an Oracle Account? [Sign In](#)

Email Address *

dhajare191@gmail.com

Your email address is your username.

✓ We will email a confirmation to you

Password *

.....

Passwords must have upper and lower case letters, at least 1 number and special character, not match or contain email, and be at least 8 characters long.

✓ Password meets requirements

Retype password *

.....

✓

Country *

India

✓

Name *

Hajare

✓

Job Title *

✓

Work Phone *

+919763440273

✓

Company Name *

XYZ

✓

Address *

Pune

✓

City *

Pune

✓

State/Province

Maharashtra

✓

ZIP/Postal Code *

413202


✓

You may opt-out of all marketing communications: [Unsubscribe](#).


By clicking on the "Create Account" button below, you understand and agree that the use of Oracle's web site is subject to the [Oracle.com Terms of Use](#). Additional details regarding Oracle's collection and use of your personal information, including information about access, retention, rectification, deletion, security, cross-border transfers and other topics, is available in the [Oracle Privacy Policy](#).

Create Account

Step 2: Verify email address by login to email account

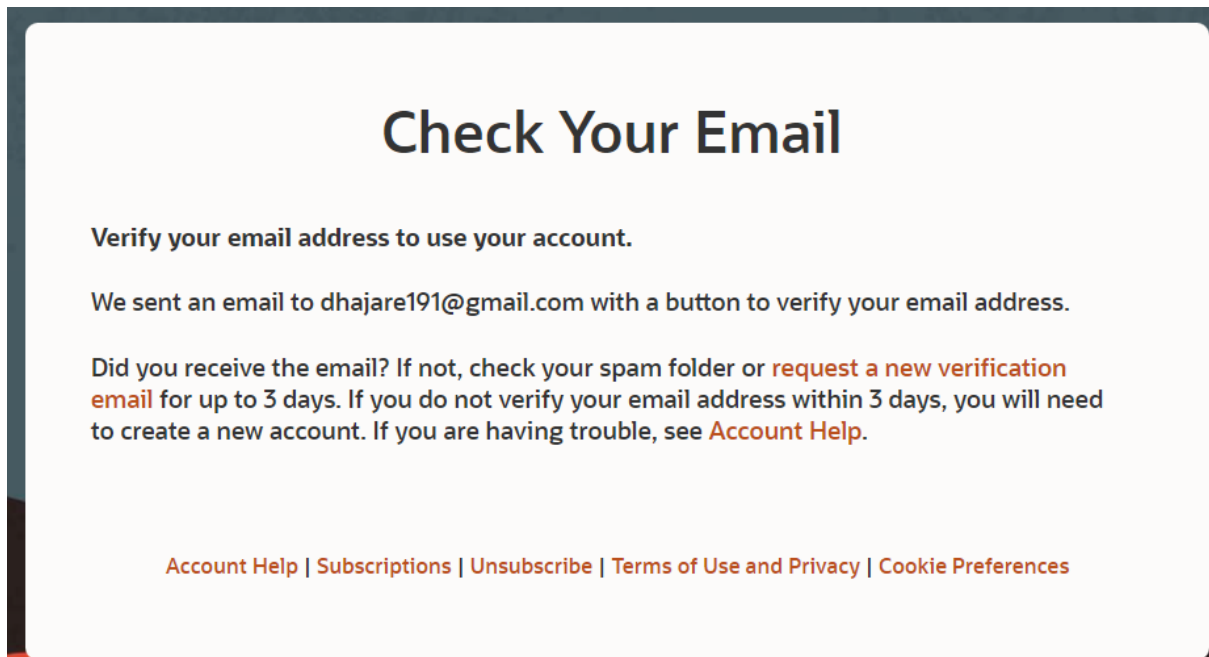


Step 3: After verification of email, you will get this screen, click on **continue**

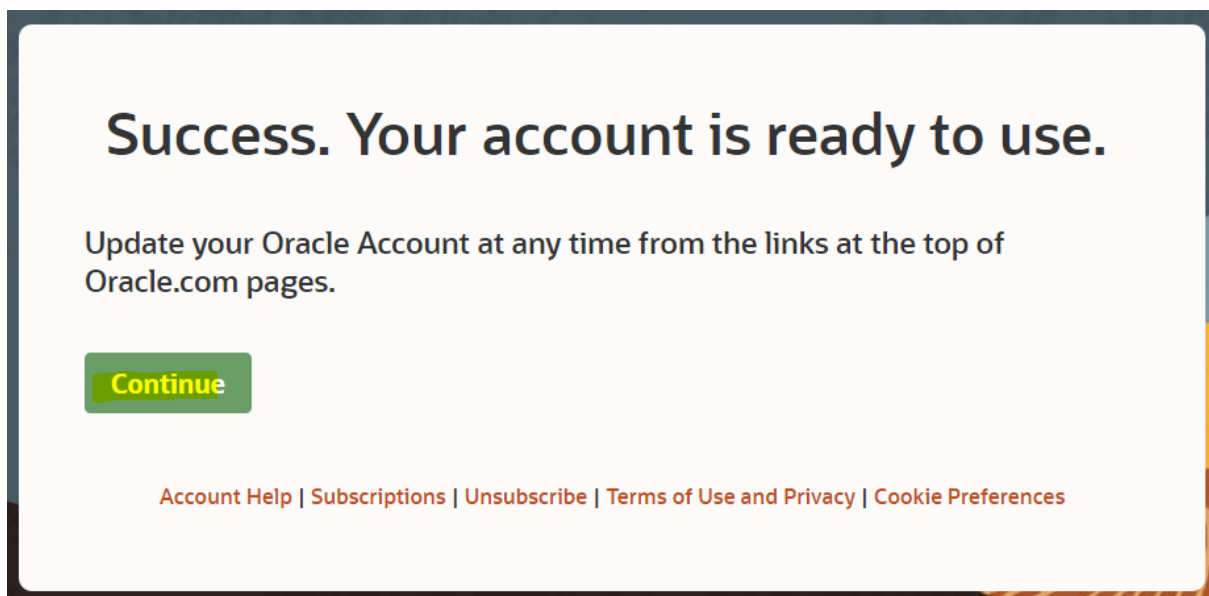

Step 4: open google in new tab

Step 5: type "WebLogic server download" as below



Step 6: click on that Click

<https://www.oracle.com> > ... ▼ या पानाचे भाषांतर करा

Oracle WebLogic Server Installers


Quick Installer intended for Oracle **WebLogic Server** and Oracle Coherence development only.

Download, Release Note. Quick Installer for Mac OSX, Windows and ...

Steps: 7 ones above link opened then search for below version and click on Download link

Oracle WebLogic Server 12.2.1.3

Generic Installer for Oracle WebLogic Server and Oracle Coherence:

 Generic (800 MB)


Next window will open

×

You must accept the [Oracle License Agreement](#) to download this software.

☒ I reviewed and accept the Oracle License Agreement
Required

You will be redirected to the login screen in order to download the file.

Download fmw_12.2.1.3.0_wls_Disk1_1of1.zip 

Step 8: Enter login Credentials of Oracle account then file start downloading

Oracle account sign in

Username

i

Password

i

Sign in

[Need help?](#)


Don't have an Oracle Account?

Create Account

© Oracle | [Terms of Use](#) | [Privacy Policy](#)

After download completion you will get below zip file


▼ Today (1)



 fmw_12.2.1.3.0_wls_Disk1_1of1.zip



Copy that zip file and paste it on either E drive or D drive as per your choice


Open command prompt in Administrator Mode and first set JAVA_HOME and path of JDK folder



```
E:\App Support 3\Weblogic Server>set JAVA_HOME=C:\Program Files\Java\jdk1.8.0_251
E:\App Support 3\Weblogic Server>set path=C:\Program Files\Java\jdk1.8.0_251\bin
E:\App Support 3\Weblogic Server>java -jar fmw_12.2.1.3.0_wls.jar
```

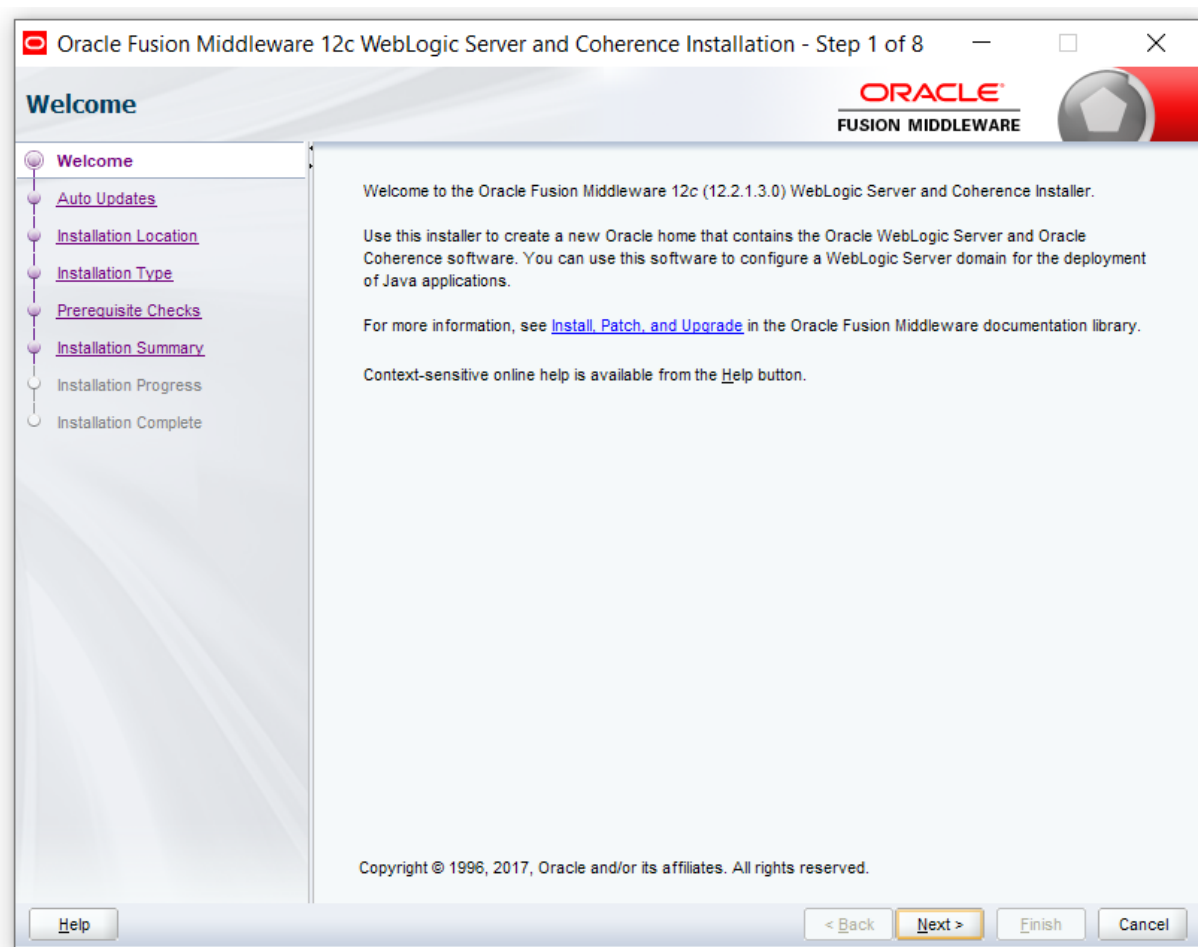

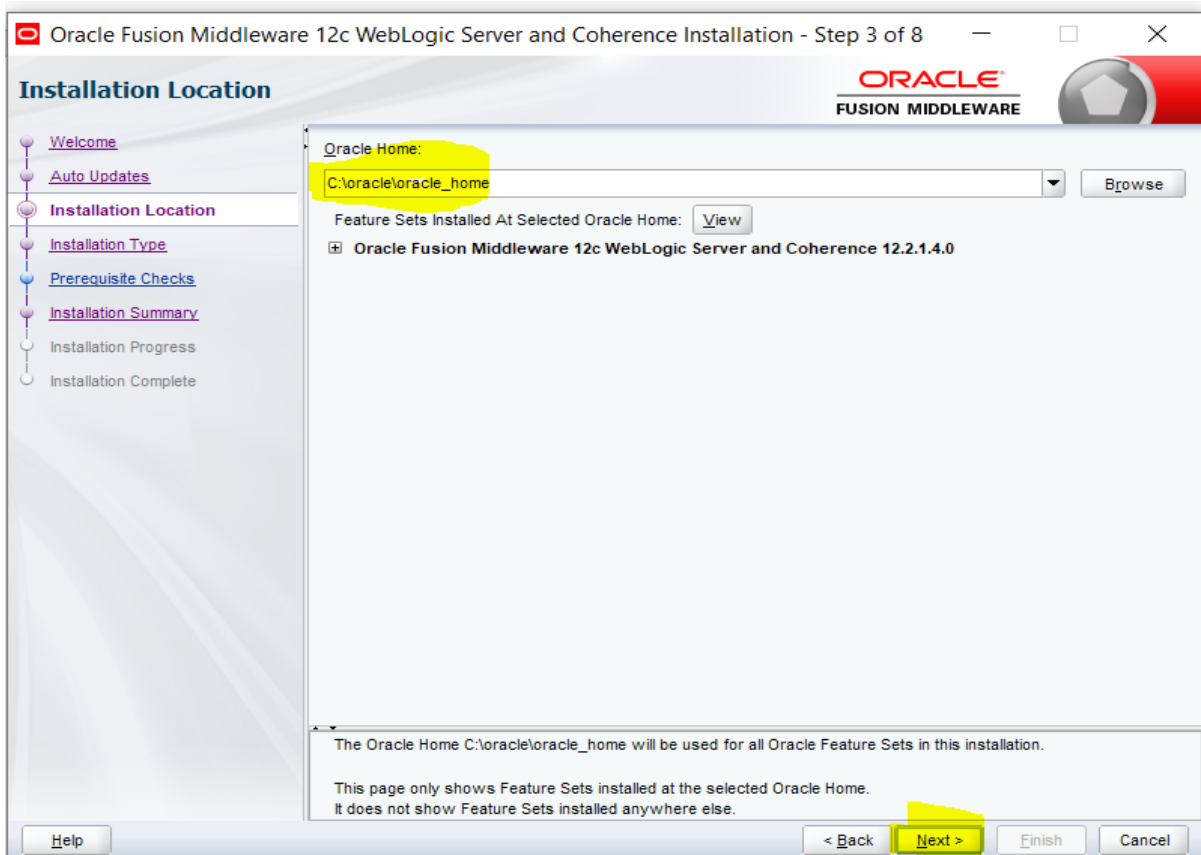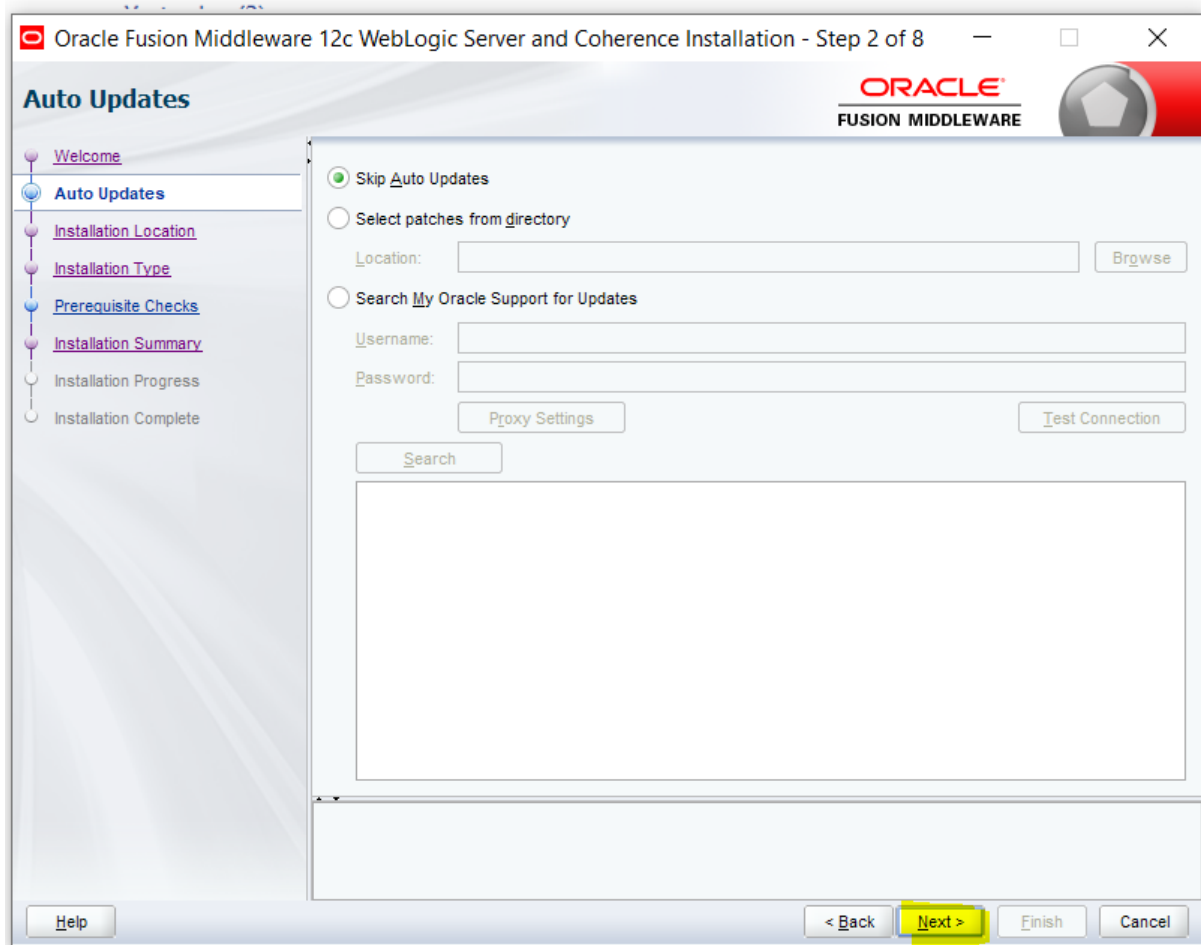

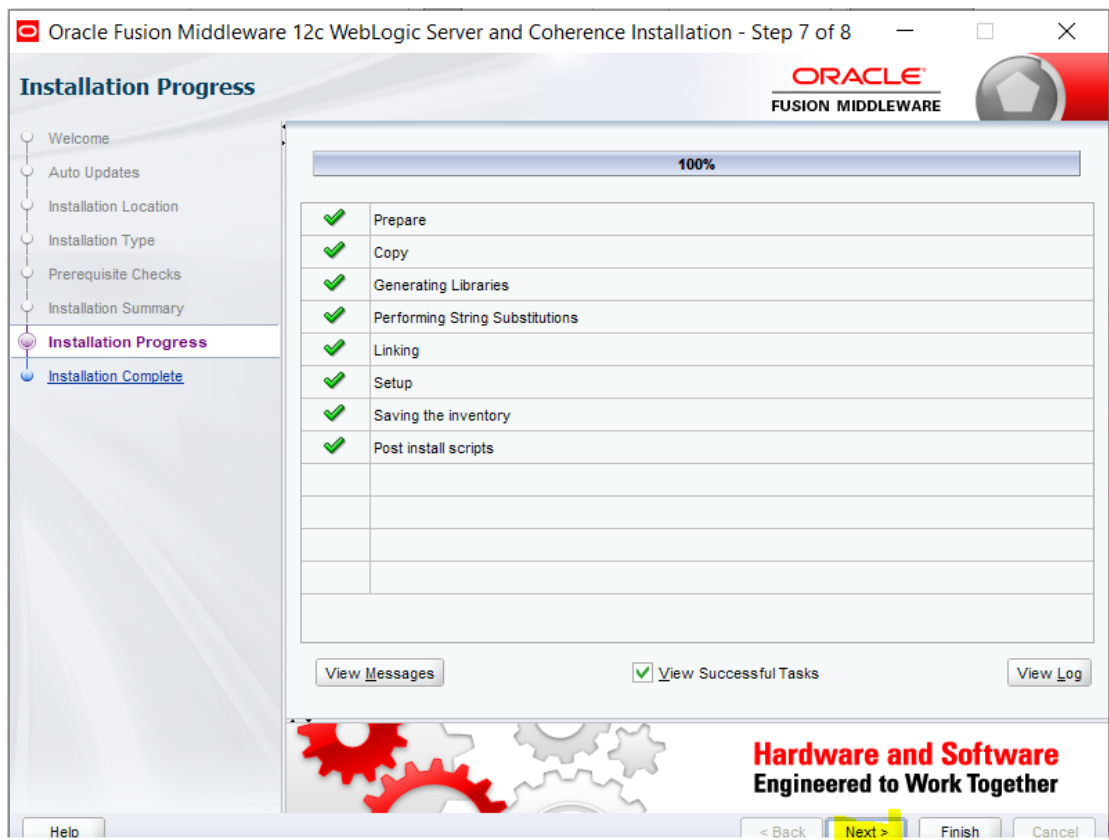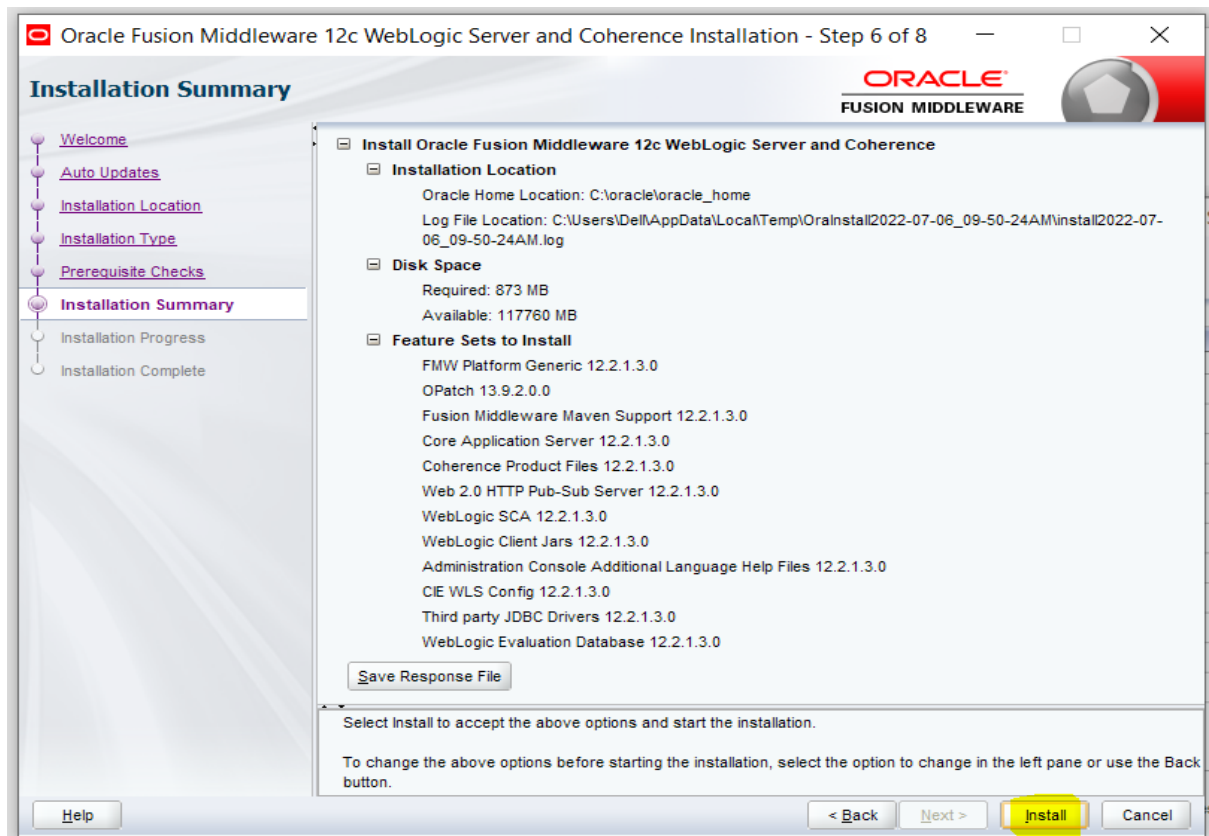

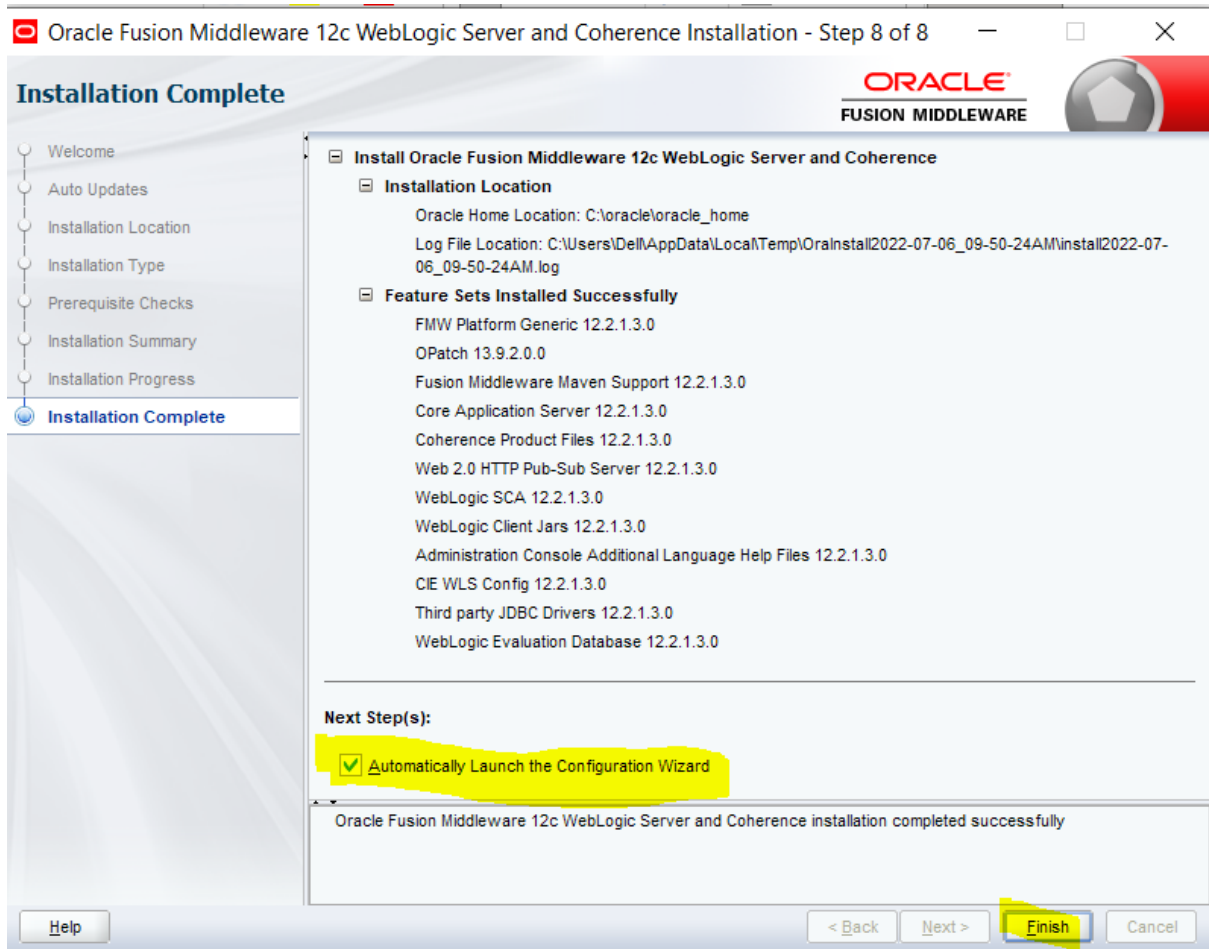

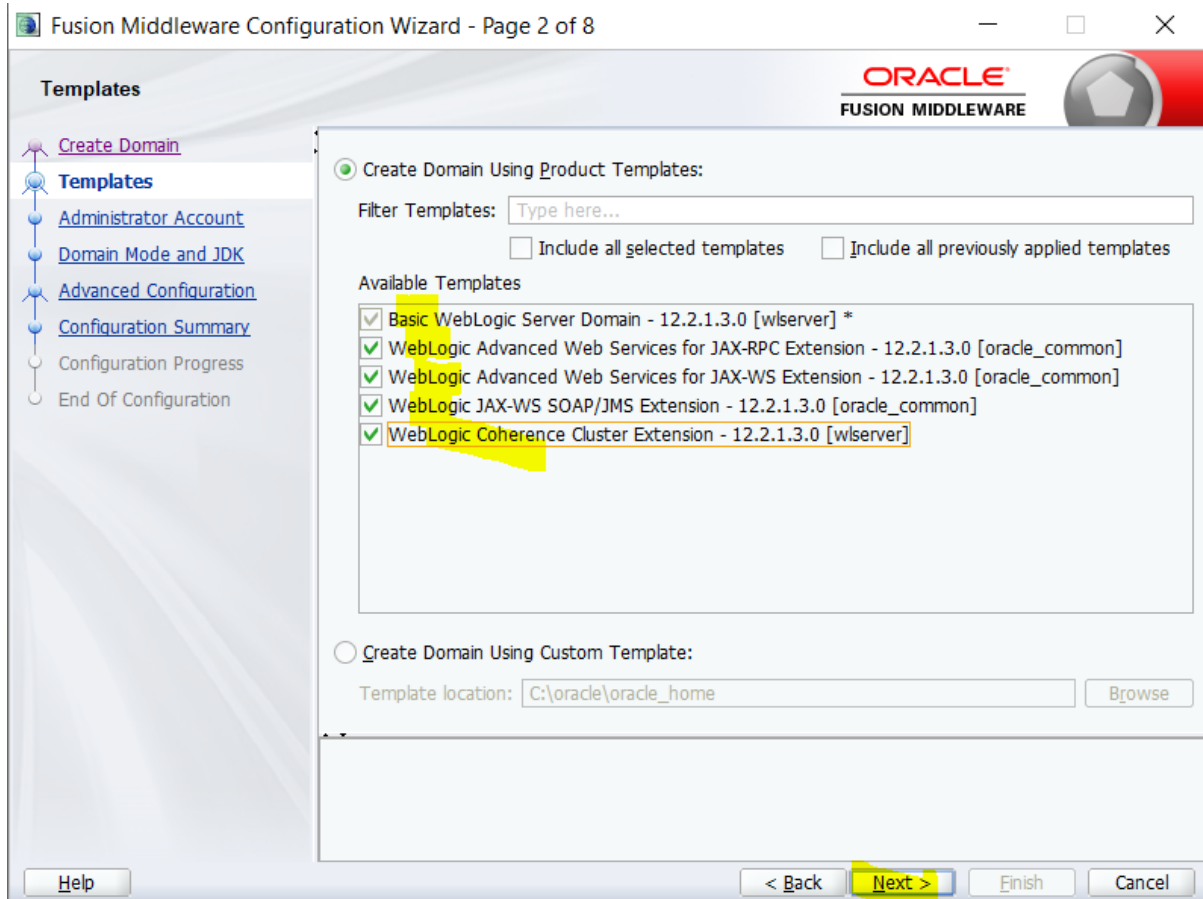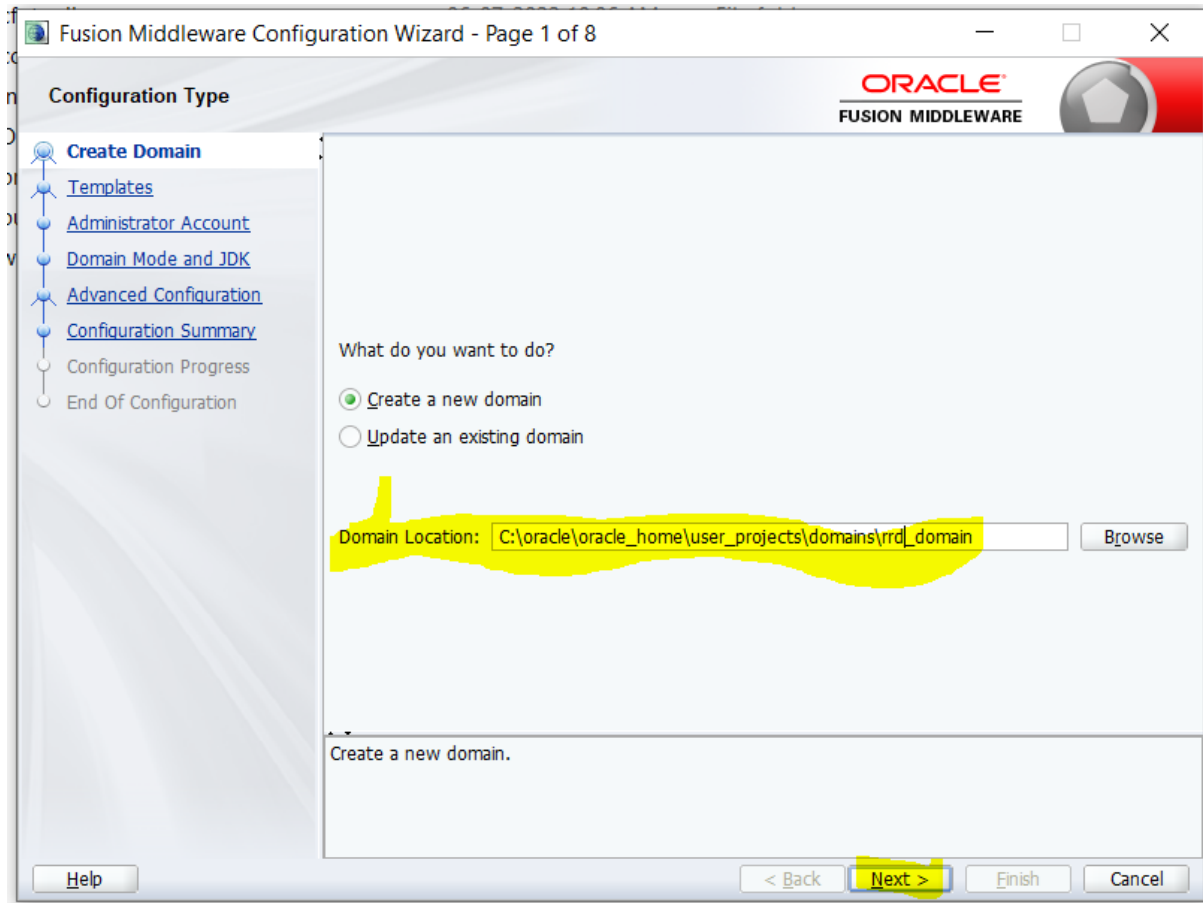

Fusion Middleware Configuration Wizard - Page 3 of 8

Administrator Account

ORACLE
FUSION MIDDLEWARE

Create Domain
Templates
Administrator Account
Domain Mode and JDK
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration

Name: weblogic
Password:
Confirm Password:

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back Next > Finish Cancel

User name :weblogic

Password: weblogic@123

Fusion Middleware Configuration Wizard - Page 4 of 8

ORACLE
FUSION MIDDLEWARE

Domain Mode and JDK

Create Domain

Templates

Administrator Account

Domain Mode and JDK

Advanced Configuration

Configuration Summary

Configuration Progress

End Of Configuration

Domain Mode

☒ Development

Utilize boot.properties for username and password, and poll for applications to deploy.

☐ Production

Require the entry of a username and password, and do not poll for applications to deploy.

JDK

☒ Oracle HotSpot 1.8.0_251 C:\PROGRA~1\Java\JDK18~1.0_2

☐ Other JDK Location:

Browse

Help

< Back

Next >

Finish

Cancel

Fusion Middleware Configuration Wizard - Page 5 of 9

Advanced Configuration

ORACLE
FUSION MIDDLEWARE

Create Domain
Templates
Administrator Account
Domain Mode and JDK
Advanced Configuration
Administration Server
Configuration Summary
Configuration Progress
End Of Configuration

☒ **Administration Server**
Modify Settings

☐ **Node Manager**
Configure Node Manager

☐ **Topology**
Add, Delete or Modify Settings for Managed Servers, Clusters, Virtual Targets and Coherence

☐ **Deployments and Services**
Target to Servers or Clusters

☐ **File Store**
Modify Settings

Help < Back **Next >** Finish Cancel

Fusion Middleware Configuration Wizard - Page 6 of 20

Administration Server

ORACLE
FUSION MIDDLEWARE

[Create Domain](#)
[Templates](#)
[Administrator Account](#)
[Domain Mode and JDK](#)
[Advanced Configuration](#)
[Administration Server](#)
[Node Manager](#)
[Managed Servers](#)
[Clusters](#)
[Server Templates](#)
[Coherence Clusters](#)
[Machines](#)
[Virtual Targets](#)
[Partitions](#)
[Deployments Targeting](#)
[Services Targeting](#)
[File Stores](#)
[Configuration Summary](#)
[Configuration Progress](#)
[End Of Configuration](#)

Server Name: AdminServer
 Listen Address: All Local Addresses
 Listen Port: 7001
 Enable SSL: ☐
 SSL Listen Port:

Port number must be between 1 and 65535, and different from SSL listen port and coherence port.

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 7 of 9

Configuration Summary

ORACLE
FUSION MIDDLEWARE

[Create Domain](#)
[Templates](#)
[Administrator Account](#)
[Domain Mode and JDK](#)
[Advanced Configuration](#)
[Administration Server](#)
[Configuration Summary](#)
[Configuration Progress](#)
[End Of Configuration](#)



View: Deployment

rrd_domain (C:\oracle\oracle_home\user_projects\
 AdminServer
 AdminServer
 AppDeployment
 state-management-provider-memory

Name	Basic WebLogic Server Domain
Description	Create a basic WebLogic Server d
Author	Oracle Corporation
Location	C:\oracle\oracle_home\wlserver\c
Name	WebLogic JAX-WS SOAP/JMS Ext
Description	Extend an existing WebLogic Serv
Author	Oracle Corporation
Location	C:\oracle\oracle_home\oracle_con
Name	WebLogic Coherence Cluster Ext
Description	Extend an existing WebLogic Serv
Author	Oracle Corporation
Location	C:\oracle\oracle_home\wlserver\c
Name	WebLogic Advanced Web Service
Description	Extend an existing WebLogic Serv
Author	Oracle Corporation
Location	C:\oracle\oracle_home\oracle_con
Name	WebLogic Advanced Web Service
Description	Extend an existing WebLogic Serv
Author	Oracle Corporation
Location	C:\oracle\oracle_home\oracle_con

Select **Create** to accept the above options and start creating and configuring a new domain. To change the above configuration before starting Domain Creation, go back to the relevant page by selecting its name in the left pane, or by using the **Back** button.

Help < Back Next > Create Cancel

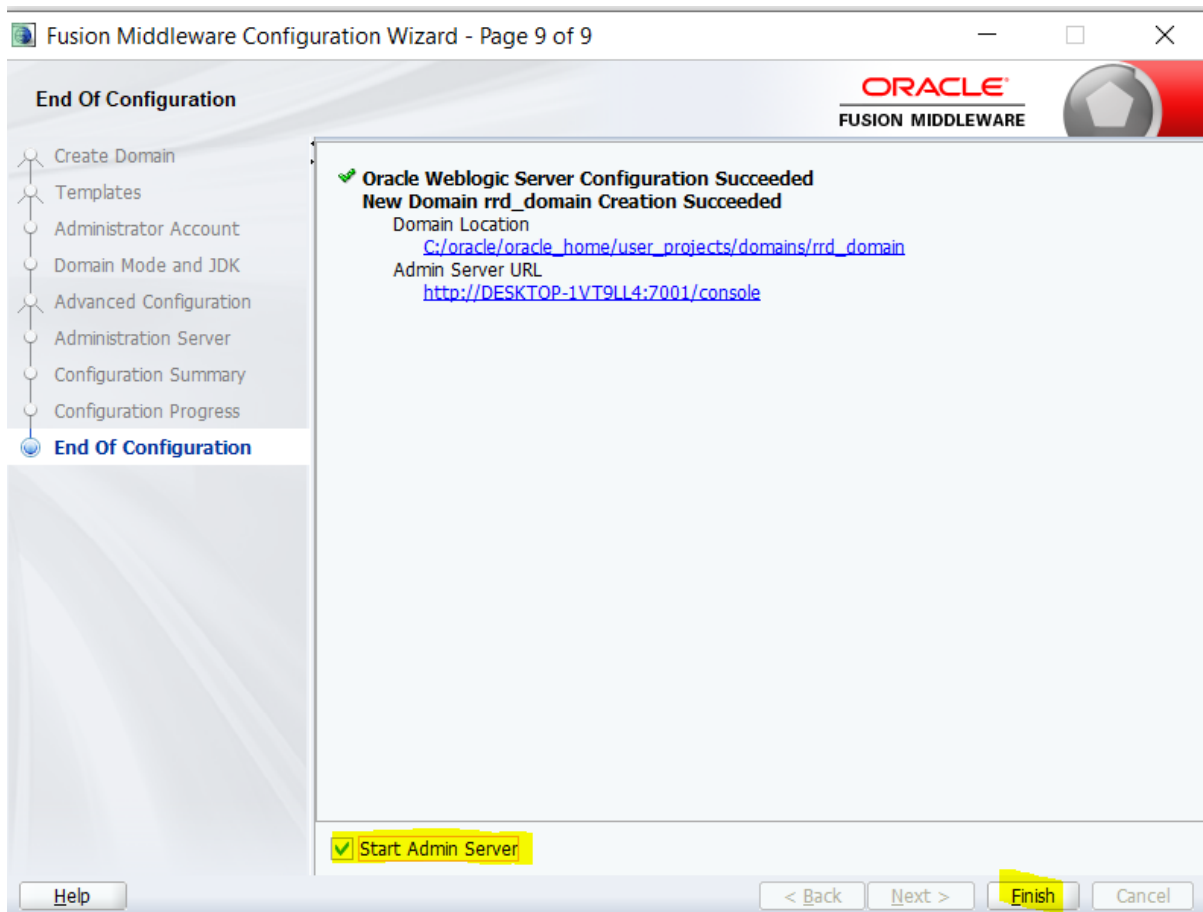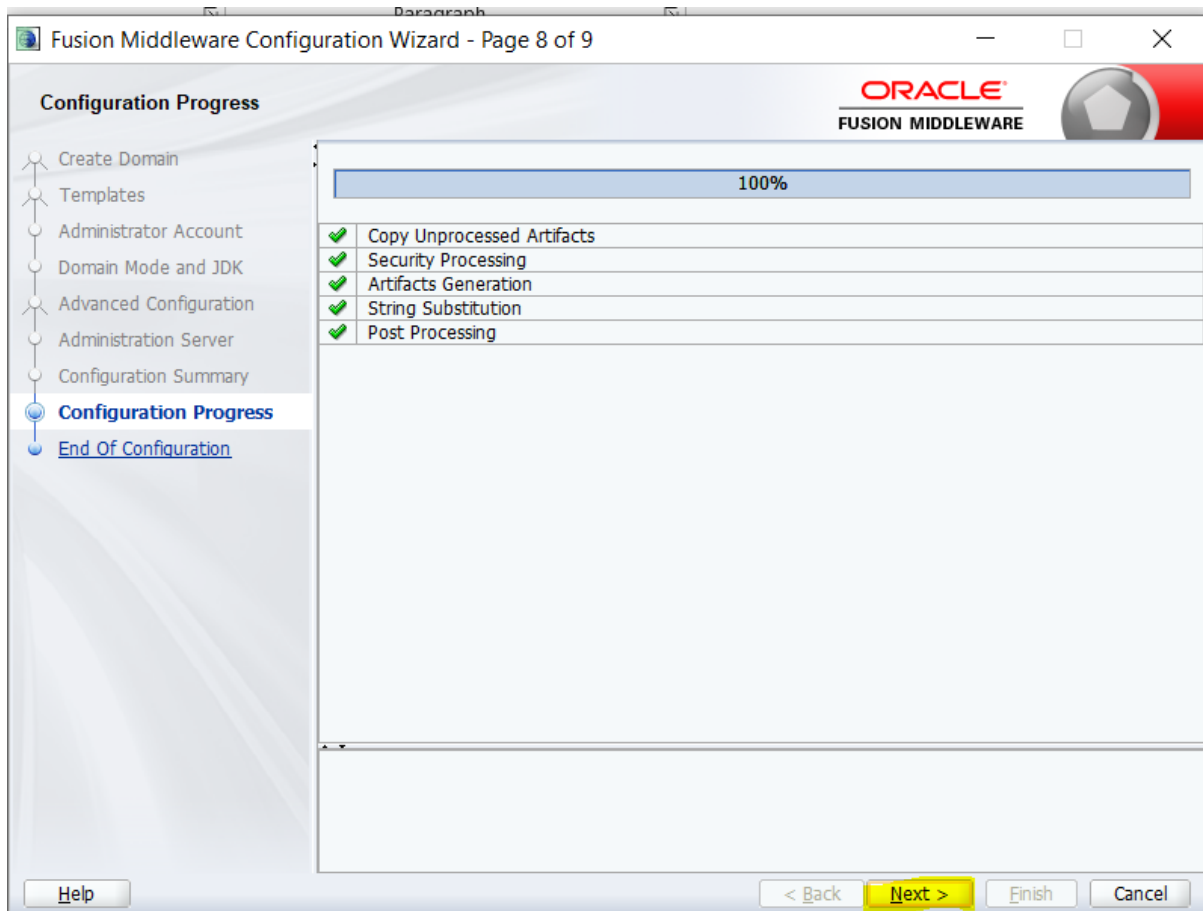

User name : node_manger

Password: node@123