

Project1 - Report


Rongsheng Qian

301449387


Q 1.1 Inner Product Layer

Inner Product Test

Batch 1




Batch 2




Q 1.2 Pooling Layer

Pooling Test


Input 1



Output 1





Input 2



Output 2



Q 1.3 Convolution Layer

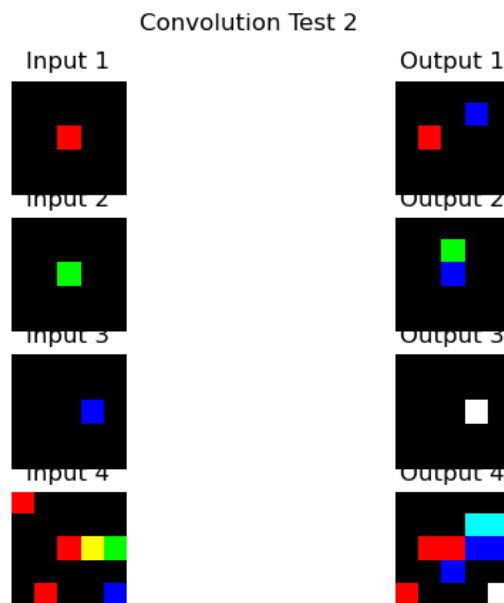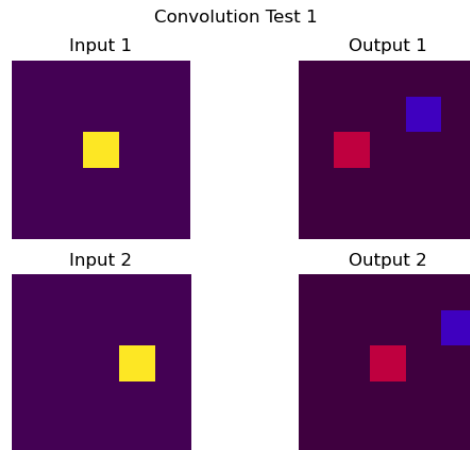

Q 1.4 ReLU

Problem I meet:

When I am running train_lenet to train my network there will report a warning:

"RuntimeWarning: divide by zero encountered in log nll = -np.sum(np.log(P[I == 1]))"

Solution:

I think there is sth wrong caused by copying pointer in relu forward. I don't know how to fix it so i just implemented it in another way. Then the network worked and accuracy reached 95. I have tried np.maximum() function. It works for me. (My original method is out = in; out[out<0]=0 which returns error)

Q 2.1 ReLU

Problem I meet:

None

Solution:

None

```
1 def relu_backward(output, input_data, layer):
2     ##### Fill in the code here #####
3     # Replace the following line with your implementation.
4     #input_od = np.zeros_like(input_data['data'])
5     last_diff = output["diff"]
6     data = input_data["data"]
7
8     diff_h = np.where(data < 0, 0, 1)
9
10    input_od = last_diff * diff_h
11
12    return input_od
```

Q 2.2 Inner Product layer

Problem I meet:

Output param["b"]'s size doesn't match

Solution:

Do transpose on the output param["b"] to let its shape become [1, _]

```
1 def inner_product_backward(output, input_data, layer, param):
2     """
3     Backward pass of inner product layer.
4
5     Parameters:
6     - output (dict): Contains the output data.
7     - input_data (dict): Contains the input data.
8     - layer (dict): Contains the configuration for the inner product layer.
9     - param (dict): Contains the weights and biases for the inner product layer.
10    """
11    param_grad = {}
12    ##### Fill in the code here #####
13    # Replace the following lines with your implementation.
14    param_grad['b'] = np.zeros_like(param['b'])
```

```


15     param_grad['w'] = np.zeros_like(param['w'])
16     input_od = None
17
18     last_diff = output["diff"]
19     data = input_data["data"]
20     batch_size = input_data["batch_size"]
21     input_od = np.zeros_like(data)
22
23     input_size = input_data["data"].shape[0]
24     output_size = last_diff.shape[0]
25
26     learning = np.ones((batch_size,1))
27     diff_h = param["w"].T
28     #print(last_diff.shape, learning.shape)
29     param_grad['b'] = np.matmul(last_diff, learning).T
30
31     for batch in range(batch_size):
32         hi = data[:,batch]
33         for i in range(output_size):
34             tempt = hi * last_diff[i, batch]
35             param_grad['w'][:,i] = param_grad['w'][:,i] + tempt
36         # Done
37         input_od[:,batch] = np.matmul(last_diff[:,batch], diff_h)
38
39     return param_grad, input_od

```

Q 3.1 Training

```
1 0
2 test accuracy: 0.104
3 500
4 test accuracy: 0.954
5 1000
6 test accuracy: 0.948
7 1500
8 test accuracy: 0.952
9 2000
10 test accuracy: 0.956
```

Q 3.2 Test the network

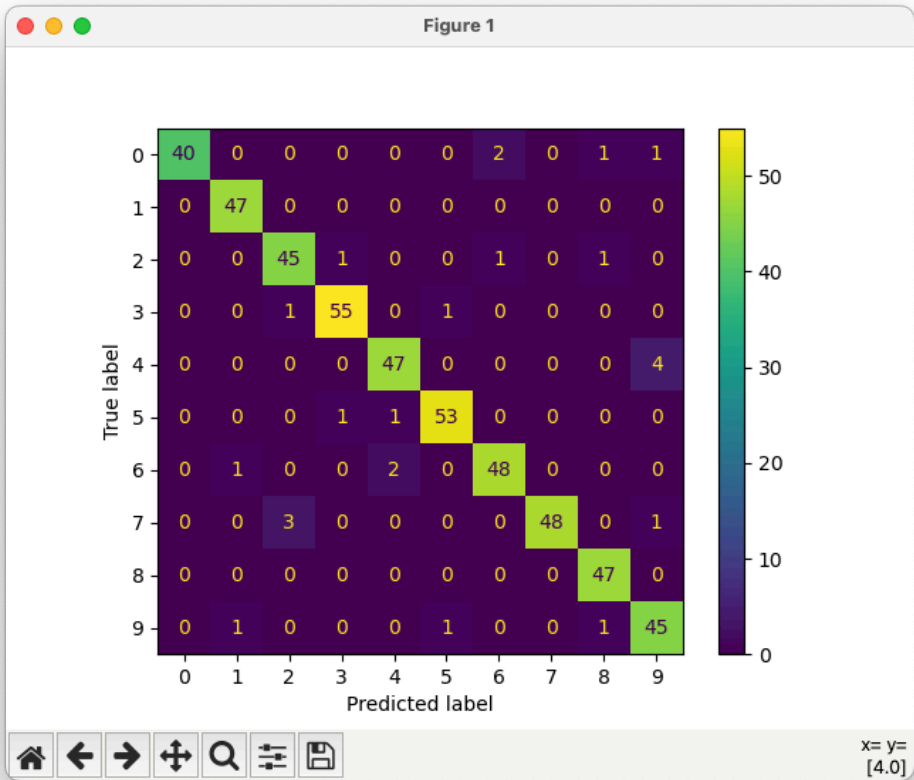

		precision	recall	f1-score	support
3	0.0	1.00	0.91	0.95	44
4	1.0	0.96	1.00	0.98	47
5	2.0	0.92	0.94	0.93	48
6	3.0	0.96	0.96	0.96	57
7	4.0	0.94	0.92	0.93	51
8	5.0	0.96	0.96	0.96	55

9	6.0	0.94	0.94	0.94	51
10	7.0	1.00	0.92	0.96	52
11	8.0	0.94	1.00	0.97	47
12	9.0	0.88	0.94	0.91	48
13	accuracy			0.95	500
14	macro avg	0.95	0.95	0.95	500
15	weighted avg	0.95	0.95	0.95	500

The top two confused pairs of classes are (4->9) which has 4 wrong cases and (7->2) which have 3 wrong cases.

For the pair (4,9), the network may predict 4 as 9. So 9.0 get the lowest precision (0.88) in ten digit. The reason why it happened was the upper part of "4" sometimes closed (or nearly closed) by handwriting which seemed like 9.

For the pair (7,2), the network may predict 7 as 2. So 2.0 get the second lowest precision (0.92) in ten digit. The reason why it happened was the upper part of "7" looks really like the upper part of "2" and sometimes the corner of "7" is not sharp enough which is more likely to predict as "2".

Q 3.3 Real-world testing



```

1 | predict: [7]; label: 7
2 | predict: [4]; label: 4
3 | predict: [0]; label: 0
4 | predict: [2]; label: 2
5 | predict: [9]; label: 9

```


Using Minst digit picture can get the high accuracy.(100% for 5 images)

Network works well when the image looks like the hand-write stuff in MINST (same writing type and bold font). We use other "type" hand-write the network may have lower accuracy due to the lack of training data. And If we don't use the bold font image the accuracy rate will be extremely low. (Lower than 40%)

Problem I meet: Using Minst digit picture can get the (3/5) accuracy. Reason & solution: Forget to normalize the image from (0-255) to (0-1)

Part 4 Visualization

Q 4.1

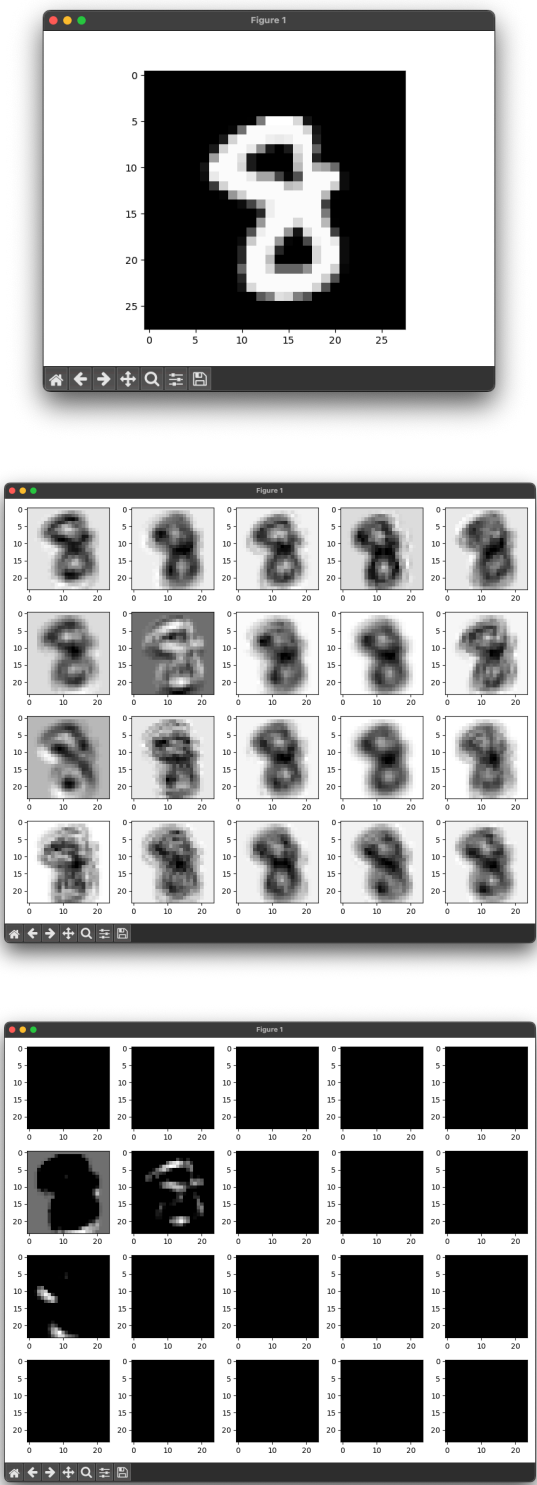

Q 4.2 Compare

