

# RSS3: The Open Information Layer

Natural Selection Labs

**Abstract**—Inspired by the original RSS Standard [1], this paper presents RSS3, the Open Information Layer for the Open Web. The paper serves as an enhanced version of the initial whitepaper titled “RSS3: A Next-Generation Feed Standard” [2]. Following the release of the initial whitepaper, we have consistently adhered to the proposed architecture it outlines to conduct experiments and advance the development of the RSS3 Network [3]–[5]. The Network has evolved into what is now known as the Open Information Layer as a part of the ever-changing dynamics of the Open Web. This paper summarizes the research and development output since then, providing insights into RSS3’s vision and its novel decentralization architecture. Finally, we present the Network’s tokenomics and governance model and discuss the future of RSS3.

## I. INTRODUCTION

RSS3 is the Open Information Layer, structuring Open Information. It is RSS3’s mission to construct the Open Web by enhancing the free flow of Open Information.

Inspired by the original RSS standard [1] and the spirit of openness it represents, the Open Information Layer (OIL) aims to be a decentralized and permissionless layer where information flows openly without any restrictions.

## II. RSS3 NETWORK

The RSS3 Network is a decentralized network that is formed by two Sublayers: the Data Sublayer (DSL) and the Value Sublayer (VSL). This novel network structure is the outcome of a series of research and development experiments that were conducted to address the challenges faced by the Open Web.

Open Information (OI) is typically found across various types of networks, including decentralized, federated, and centralized networks that allow permissionless access. The Data Sublayer (DSL) is responsible for indexing and structuring OI for interoperability. This is achieved by introducing a crucial standard, known as the RSS3 Protocol (Protocol), see Section III-A, enabling network-agnostic applications to be built on top of the DSL. The DSL then leverages the Value Sublayer (VSL), see Section IV, to build an ownership economy for the Open Web (OW).

### A. \$RSS3

\$RSS3 is the Network’s native utility token. It is used to cover gas, pay request fees, operate nodes, participate in staking and trust, distribute incentives, and engage in various network activities. See Section V for more details.

### B. Epoch ( $\epsilon$ )

An Epoch ( $\epsilon$ ) is a period of time used as a reference to measure the RSS3 Network’s operation, during which the Network’s parameters are fixed. The duration of an epoch is

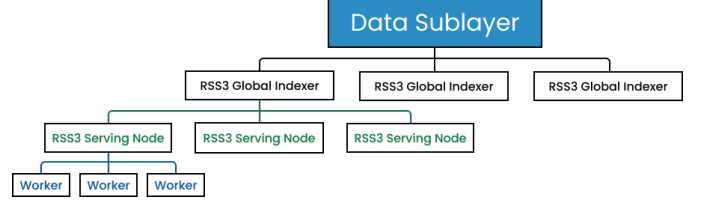


Fig. 1: A topology of the Data Sublayer.

determined by the Network and is subject to potential future changes.

At the end of each  $\epsilon$ , the Network will distribute the Network Rewards ( $R$ ) to the RSS3 Network’s participants and update the Network’s parameters when necessary.

## III. DATA SUBLAYER

The Data Sublayer (DSL) is responsible for the Open Information life cycle management, which includes indexing, transformation, storage, dissemination, and consumption [6]. In this section, we introduce the DSL and its fundamental components; see Figure 1.

The DSL is formed by two components (see section III-B and section III-C) and uses the Protocol (see section III-A) to structure the information for applications in social, search, AI, and beyond.

### A. RSS3 Protocol

The RSS3 Protocol is used to structure Open Information for interoperability [7].

Open Information, indexed from multiple Permissionless Data Sources (PDSs), is structured by Nodes (Nodes) into the Protocol format for interoperability.

PDSs use different data structures; Within a PDS, there might be multiple products, services, and protocols that leverage different data structures to suit their needs. This lack of standardization means limited interoperability, limiting the creation of scalable applications.

The Protocol addresses this issue by offering a unified set of data structures that serve as an abstraction. This abstraction simplifies the integration process, making it more manageable and scalable for developers to work with data across various PDSs.

### B. RSS3 Node ( $N$ )

A Node, also known as an RSS3 Node, is responsible for indexing, transforming, storing, and ultimately serving the Open Information to the end users.

The operation of a Node is permissionless and is subject to a set of requirements set by the Network.

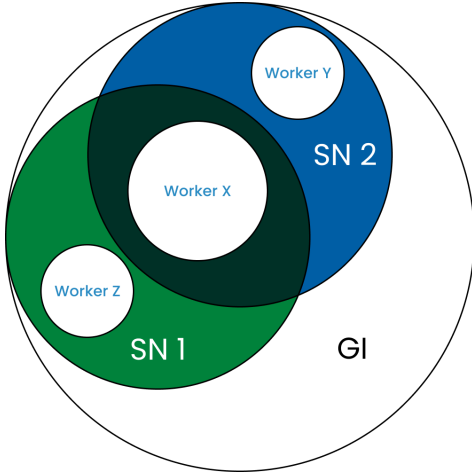


Fig. 2: A Venn diagram illustrating the relationship between the worker, the Node, and the Global Indexer.

### 1) Indexing

Each Node operates a number of workers that index and structure OI from PDS. Workers are community-maintained “rules” that define how OI is indexed and transformed into the Protocol format.

Since each Node is independent, it is possible for different Nodes to employ different combinations of workers to cover different PDSs. This design enables node operation to be flexible, accessible, and affordable, in turn offering a high degree of decentralization and robustness.

### 2) Serving

Each Node operates a standard set of interfaces that serve structured OI in Protocol to the end users via a [Global Indexer \(GI\)](#).

Each successful request served on the DSL is recorded, and the corresponding Request Fees paid by requesters are distributed to the Node; See [Section V-B1](#) for more details.

### C. RSS3 Global Indexer (GI)

A GI is responsible for facilitating coordination among Nodes and engaging with the VSL and performs critical functions to ensure the DSL is robust and reliable.

Given the importance of the GI to the Network, its operation is subject to a set of stringent requirements imposed by the Network.

#### 1) Performance Assurance

A GI acts as a load balancer and query router for end users to retrieve information from Nodes. The unique architecture of the DSL demands GIs to be equipped with more computational capabilities to work out the optimal route for end users to retrieve specific information from Node and frequently from a group of Nodes simultaneously.

#### 2) Quality Assurance

A GI acts as a supervisor for Nodes to ensure the quality of service. With the DSL being a permissionless Sublayer, the quality needs to be maintained strictly to ensure RSS3 Network’s robustness and reliability. A GI monitors the quality of Nodes and slashes the Node if it fails to meet the requirements.

#### 3) Proof Onchain

A GI keeps track of the work and slash records of Nodes and submits them to the VSL for settlement and reward allocation.

### D. Reliability Score

A GI routes requests to Nodes based on their information coverage and a [Reliability Score \( \$\sigma\$ \)](#). The calculation of  $\sigma$  is based on a range of factors, including but not limited to the Node’s uptime, work, slash records, operation deposit, and staking/trust pool size. Nodes with a higher  $\sigma$  have an increased likelihood of receiving requests.

## IV. VALUE SUBLAYER

The [Value Sublayer \(VSL\)](#) is an Ethereum Layer 2 blockchain built with a customized OP Stack [8] using Celestia [9] as the Data Availability layer. It is responsible for handling value derived from Open Information activities and applications, establishing a healthy ownership economy for the Network.

### A. Ethereum Layer 2

Blockchain technology, by its inherent design, is adept at managing value and ownership through consensus mechanisms. Among various blockchain construction methodologies, we have chosen to establish an Ethereum Layer 2 solution. This preference is justified by the widespread adoption of Ethereum’s EVM (Ethereum Virtual Machine) for smart contract deployment, its substantial potential for liquidity, and the existing issuance of \$RSS3 on the Ethereum Mainnet. This strategic choice facilitates a seamless transition of \$RSS3 into a utility token for the RSS3 Mainnet.

### B. Scaling

The VSL is built with a customized OP Stack by RSS3 as its scaling solution. The stack is selected for its efficiency, robust ecosystem, and the shared vision of an open and decentralized future. The choice is further justified by the proven maturity of the Optimistic rollup technology, which is currently facilitating multiple Layer 2 solutions. To cater to the distinct requirements of the RSS3 Mainnet architecture, we have initiated a fork of the OP Stack and implemented necessary customizations.

### C. Data Availability

The VSL is responsible for handling value derived from OI activities and applications. Therefore, the VSL is expected to process a large volume of microtransactions. To further reduce the cost of these transactions, the VSL adopts Celestia as its Data Availability layer without compromising security and decentralization.

#### D. Native Token

\$RSS3 is the native token of the VSL. This makes the VSL the first native gas Optimistic rollup L2 with Celestia as the DA layer.

### V. TOKENOMICS

In this section, we introduce the detailed tokenomics of the RSS3 Network. We present the concept of Reward Pools, the Network Rewards's calculation and allocation formulas, and the slashing mechanism employed to enforce the Network's security and stability.

#### A. Node Operation

Node Operators are incentivized to operate and maintain the Network by receiving \$RSS3 as rewards.

- 1) Anyone can become a Node Operator to launch an RSS3 Node and join the RSS3 Network without requiring prior permission.
- 2) A Node Operator has the ability to configure the Node's coverage, which directly influences the Node's capability to respond to various types of requests. A broader coverage means more computational resources are required and an increased likelihood of receiving requests.
- 3) A Node can be operated in either a Normal mode as  $N$  or a Public Good mode as  $N_p$ . A Normal Node is eligible for Network Rewards but requires a deposit of \$RSS3 into its  $P_o$ . A Public Good Node is ineligible for Network Rewards but requires no deposit.
- 4) A Normal Node has a corresponding  $P_o$  and a  $P_s$ . All Public Good Nodes collectively share a single  $P_p$ .

#### B. Reward Pools

The RSS3 Network incentivizes network participants with a portion of \$RSS3's total supply, referred to as the **Network Rewards ( $R$ )**, and allocates it into reward pools.

This section introduces three reward pools: the **Operation Pool ( $P_o$ )**, the **Staking Pool ( $P_s$ )**, and the **Public Good Pool ( $P_p$ )**. See Figure 3 for an illustration.

##### 1) Operation Pool ( $P_o$ )

An **Operation Pool ( $P_o$ )** is used to store tokens that are allocated to a Normal Node from two sources:

- 1) The **Request Fees ( $F$ )** collected from requests served on the DSL
- 2) The **Operation Tax ( $T$ )** collected from the Node's  $P_s$

The Node Operator can set a tax rate,  $\tau$ , which is applied to its  $P_s$ , in conjunction with its **Deposit ( $D$ )** to determine the amount of Tax collected from its  $P_s$ . See Section V-D4. The tax applies to the Network Rewards being allocated to the Node's  $P_s$  but does not apply to the staked tokens.

Only the corresponding Node Operator can withdraw tokens from its  $P_o$ , and the withdrawal is subject to a waiting period imposed by the Network.

##### 2) Staking Pool ( $P_s$ )

A **Staking Pool ( $P_s$ )** is used to store staked tokens for a Normal Node. Network participants can stake tokens into a Normal Node's  $P_s$  to increase the Node's chance to receive requests on the DSL.

The allocation of Network Rewards into a Node's  $P_s$  at the end of each epoch  $\epsilon$  is determined by two factors:

- 1) **Operation Rewards ( $R_o$ )**, the Node's normalized work contribution  $W$  in proportion to the total work done on the DSL (See Section V-D2)
- 2) **Staking Rewards ( $R_s$ )**, the Node's  $P_s$  size in proportion to the total staked tokens on the VSL (See Section V-D1)

A tax  $T$  set by its Node Operator is then applied to the received Rewards.

##### 3) Public Good Pool ( $P_p$ )

As Public Good Nodes do not participate in incentivization, they collectively share a **Public Good Pool ( $P_p$ )** for network participants to show their support toward Public Goods provision.

This pool plays a crucial role in facilitating the provision of public goods and reinforcing the robustness of the Network. The pool has a unique  $T$  set by the Network, and the proceeds are donated to initiatives and clauses that are oriented toward public goods.

#### C. Staking, Trust, and Chip

Network participants are incentivized to secure and improve the Network with their \$RSS3 tokens.

##### 1) Staking

A Normal Node accepts staking into its  $P_s$ ; The amount of staked \$RSS3 signifies its quality and reliability, and this increases the likelihood of receiving requests for a Node.

##### 2) Trust

A Public Good Node does not have a Staking Pool and does not participate in any form of incentivization. Instead, network participants may choose to entrust such a Node, and their tokens are stored in a Public Good Pool. The trust level affects the likelihood of routing requests to a Public Good Node.

##### 3) Chip

A Chip  $C$  is an ERC-721 Non-Fungible Tokens (NFTs) representing a network participant's stake in a particular Node. When a network participant stakes or entrusts tokens to a Node  $N$ , the participant automatically receives Chips  $RSS3-N$  ( $C_N$ ).

##### a) Minting

The number of Chips minted for a particular staking or entrusting  $st$  is determined by:

$$C_{N_{\text{mint}}} = \frac{st * \max(1, C_{N_{\text{total}}})}{P_s} \quad (1)$$

Where  $C_{N_{\text{mint}}} \in \mathbb{Z}_{>0}$  is always a non-negative integer.

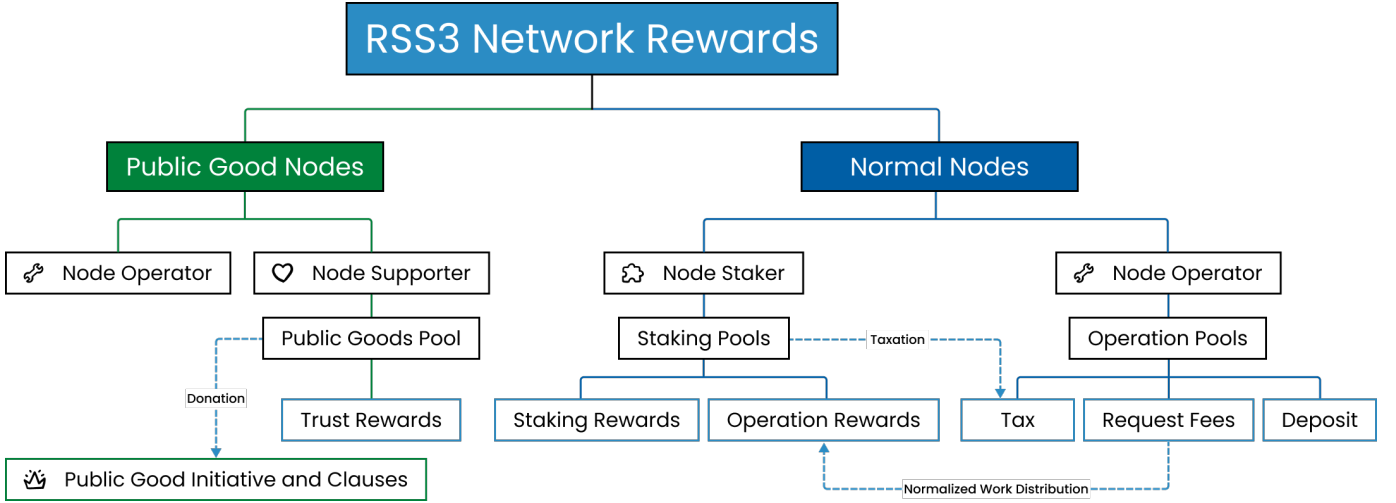


Fig. 3: The RSS3 Network Rewards are allocated differently to Normal Nodes and Public Good Nodes. See Section V-B for details.

#### b) Redemption

A Chip can be redeemed for its underlying staked or entrusted tokens at any time, subject to a waiting period imposed by the Network. The redemption amount may be different from the original staking or entrusting amount due to the change of the underlying  $P_s$  balance, which follows the same formula as Equation (1):

$$st_{\text{redeem}} = \frac{C_{N_{\text{redeem}}} * P_s}{\max(1, C_{N_{\text{total}}})} \quad (2)$$

#### D. Network Rewards ( $R$ )

In this section, we introduce the detailed Network Rewards calculation and allocation formulas.

The Network Rewards  $R$  consists of three parts:

$$R = (R_o + R_s) + R_t \quad (3)$$

See Figure 3 for an illustration. The allocation to each part is determined by the Network and is subject to potential future changes.

##### 1) Operation Rewards ( $R_o$ )

To encourage Normal Nodes to operate reliably and consistently to maintain the Network,  $R_o$  is allocated to a Node's  $P_s$  in proportion to its Request Fees ( $F$ ) collected on the DSL during the last  $\epsilon$ . A higher quality of service attracts more requests, which in turn increases the amount of  $R$  allocated to the Node, as well as the taxable amount.

$$W_{N,\epsilon} = \log_2\left(\frac{F_{N,\epsilon}}{\sum_{x=0}^{\infty} F_{x,\epsilon}} + 1\right) * G \quad (4)$$

$W_{N,\epsilon}$  denotes the normalized work contribution for a given Normal Node  $N$ , at the end of a given epoch  $\epsilon$ .  $G$  is a constant equal to  $\ln(2) \approx 0.693147$  used to offset the effect of replacing  $\ln$  with  $\log_2$ , as the former is more costly in terms of gas when it comes to on-chain computation.

$$R_{o|N,\epsilon} = \frac{W_{N,\epsilon}}{\sum_{x=0}^{\infty} W_{x,\epsilon}} * R_{o,\epsilon} \quad (5)$$

$R_{o|N,\epsilon}$  therefore denotes the Operation Rewards for a given Normal Node  $N$ , at the end of a given epoch  $\epsilon$ .

##### 2) Staking Rewards ( $R_s$ )

To encourage participation from all network participants to increase the Network's reliability,  $R_s$  is allocated to a Normal Node's  $P_s$  in proportion to the amount of staked tokens in the entire Network during the last  $\epsilon$ .

$$R_{s|N,\epsilon} = \frac{P_{s|N,\epsilon}}{\sum_{x=0}^{\infty} P_{s|x,\epsilon}} * R_{s,\epsilon} \quad (6)$$

$R_{s|N,\epsilon}$  therefore denotes the Staking Rewards for a given Normal Node  $N$ , at the end of a given epoch  $\epsilon$ .

##### 3) Trust Rewards ( $R_t$ )

To encourage participation from all network participants to increase the Network's reliability and support Public Goods provision,  $R_t$  is allocated to the  $P_p$  in proportion to the amount of entrusted tokens in the entire Network during the last  $\epsilon$ .

$$R_{t|N_p,\epsilon} = \frac{P_{t|N_p,\epsilon}}{\sum_{x=0}^{\infty} P_{t|x,\epsilon}} * R_{t,\epsilon} \quad (7)$$

$R_{t|N_p,\epsilon}$  therefore denotes the Trust Rewards for a given Public Good Node  $N_p$ , at the end of a given epoch  $\epsilon$ .

##### 4) Taxation ( $T$ )

The tax rate  $\tau$  is set by the Node Operator of a Normal Node, and is applied to the Network Rewards allocated to its  $P_s$ . The amount of tax collectible is capped at a maximum of  $c$  times the amount of the current deposit, where  $c$  is set by the Network.

$$T_{N,\epsilon} = \min(D_{N,\epsilon} * c_\epsilon, (R_{s|N,\epsilon} + R_{o|N,\epsilon}) * \tau_{N,\epsilon}) \quad (8)$$

For the Public Good Pool, the tax rate is set by the Network to collect donations to support Public Good initiatives and clauses.

### 5) Final Allocations

The total amount of tokens allocated to a Normal Node's  $P_o$  for a given epoch  $\epsilon$  is therefore:

$$F_{N,\epsilon} + T_{N,\epsilon} \quad (9)$$

The total amount of tokens allocated to a Normal Node's  $P_s$  for a given epoch  $\epsilon$  is therefore:

$$R_{o|N,\epsilon} + R_{s|N,\epsilon} - T_{N,\epsilon} \quad (10)$$

The total amount of tokens allocated to a Public Good Node's  $P_p$  for a given epoch  $\epsilon$  is therefore:

$$R_{t|N_p,\epsilon} - T_\epsilon \quad (11)$$

Refer to [Figure 3](#) for a visual illustration of the Network Rewards allocation.

### E. Slashing Mechanism

The slashing mechanism is used to enforce the Network's security and stability. It is applied to both Normal Nodes and Public Good Nodes, albeit in slightly different ways.

#### 1) Demotion

A demotion is automatically triggered when a Node fails to meet the requirements set by the Network. This can be due to a variety of reasons, including but not limited to: 1) the Node is offline for an extended period of time; 2) the Node is not serving requests in a timely manner; 3) the Node is serving requests but with incorrect information.

The Node's  $\sigma$  will be negatively impacted, diminishing its likelihood of receiving requests on the DSL. This, in turn, will reduce the Node's potential  $R_o$  and  $R_s$  allocated from the VSL.

#### 2) Slashing

A slashing is automatically triggered when a Node is repeatedly demoted. Should a slashing occur, the Node's  $P_o$  and  $P_s$  will be slashed by percentages determined by the Network. Public Good Nodes are not subject to token slashing.

The Node's  $\sigma$  will be set to 0, effectively preventing it from receiving requests on the DSL during the current epoch.

The disposition of the slashed tokens is as follows:

- a portion of the slashed tokens will be burned, with the amount determined by the Network
- a portion of the slashed tokens will go to the reporter, provided the Node's misconduct was not auto-detected by the Network
- the remaining portion of the slashed tokens will go to the  $P_p$

### 3) Challenge

When a Node is slashed, its Node Operator has the ability to challenge the slashing within a certain period. A successful challenge will result in the slashed tokens being returned to the Node's  $P_o$  and  $P_s$ .

## VI. CONCLUSION

We have presented the design of the decentralized RSS3 Network that is capable of efficiently handling Open Information indexing, structuring, disseminating, and materializing without relying on a centralized entity.

The dual Sublayer architecture combines the DSL and the VSL to ensure efficient information indexing and integrate an ownership economy. While enabling interoperability through the RSS3 Protocol, the Network breaks down barriers in information accessibility and paves the way for a more interconnected digital future. By integrating a customized Optimistic rollup scaling solution and a robust tokenomics model, the RSS3 Network enhances the flow and value of information across permissionless platforms on the Open Web.

We hope to continue contributing to the evolution of the RSS3 Network into the backbone of the future Internet that is truly open and inter-connected.

**At the heart of Natural Selection Labs, we firmly believe in the freedom of information: No organizations or authorities shall prohibit the free exercise of the right of people to create, store, and distribute their information.**

## REFERENCES

- [1] RSS Advisory Board, "RSS 2.0 Specification (Current)," <https://www.rssboard.org/rss-specification>, 2009.
- [2] "The RSS3 Whitepaper," RSS3 Network, 2022, <https://github.com/RSS3-Network/Whitepaper>.
- [3] "RSS3-Network/DSL-v0.2," RSS3 Network, 2021, <https://github.com/RSS3-Network/DSL-v0.2>.
- [4] "RSS3-Network/DSL-v0.3," RSS3 Network, 2021, <https://github.com/RSS3-Network/DSL-v0.3>.
- [5] "RSS3-Network/DSL-v0.4," RSS3 Network, 2022, <https://github.com/RSS3-Network/DSL-v0.4>.
- [6] National Institute of Standards and Technology, "Information life cycle," [https://csrc.nist.gov/glossary/term/information\\_life\\_cycle](https://csrc.nist.gov/glossary/term/information_life_cycle), 2016.
- [7] "The RSS3 Protocol," RSS3 Network, Apr. 2021, <https://github.com/RSS3-Network/Protocol>.
- [8] "RSS3-Network/optimism," <https://github.com/RSS3-Network/optimism>, 2024.
- [9] Celestia Labs, "Celestia.org," <https://celestia.org/>.



## GLOSSARY

### Deposit - $D$

Tokens required to operate a Node. 3

### Data Sublayer - DSL

A decentralized network where the Open Information flows from its source to its destination. 1–5

### Epoch - $\epsilon$

A period of time used as a reference to measure the RSS3 Network's operation. 1

### Request Fees - $F$

Fees paid to Nodes for delivering Open Information from its Permissionless Data Source to the requesters. 3, 4

### Global Indexer - GI

A Data Sublayer component that facilitates coordination among Nodes and engages with the Value Sublayer. 2

### Node - $N$

A Data Sublayer component that indexes, cleans, stores, and ultimately serves the Open Information to the end users. Denoted as  $N$  when it is in Normal mode, and  $N_p$  when it is in Public Good mode. 1, 2, 6

### Network Rewards - $R$

Tokens allocated by the RSS3 Network to incentivize network participants. 1, 3

### Open Information - OI

Information that is typically found across various types of networks, including decentralized, federated, and centralized networks that allow permissionless access. 1, 2

### Open Information Layer - OIL

A decentralized and permissionless information layer where information flows openly without any restrictions. 1

### Operation Pool - $P_o$

A pool of \$RSS3 that consists of 1) Fees collected from serving Data Sublayer requests; 2) Network Rewards allocated based on the Node's work; 3) Tax collected from its Staking Pool. 3

### Operation Rewards - $R_o$

Tokens allocated to Operation Pool by the RSS3 Network to incentivize Node operation. 3

### Open Web - OW

The next-generation Internet where information flows openly without any restrictions, as it is supposed to be. 1

### Permissionless Data Source - PDS

A repository of data that can be accessed without the need for authorization or authentication. 1, 2

### Public Good Pool - $P_p$

A collective pool of staked \$RSS3 that is used to improve the RSS3 Network by assigning trust to Public Good Nodes. 3

### RSS3 Protocol - Protocol

A unified set of data structures for interoperability. 1, 2

### Reliability Score - $\sigma$

A score used to determine the allocation of requests to Nodes. 2

### Staking Pool - $P_s$

A pool of staked \$RSS3 that is used to improve the RSS3 Network by assigning trust to Normal Nodes. 3

### Staking Rewards - $R_s$

Tokens allocated to Staking Pool by the RSS3 Network to incentivize network participation. 3

### Operation Tax - $T$

A tax collected from the Network Rewards that are allocated to a Node's Staking Pool, by its Operation Pool. 3

### Value Sublayer - VSL

A blockchain where the value created by Open Information activities is recorded and distributed. 1–3, 5