

**NC State University**  
**Department of Electrical and Computer Engineering**  
**ECE 463/563: Fall 2022 (Rotenberg)**  
**Project #2: Branch Prediction**

**by**

**SOUNDER RAJENDRAN**

NCSU Honor Pledge: "I have neither given nor received unauthorized aid on this project."

Student's electronic signature: **SOUNDER RAJENDRAN**  
(sign by typing your name)


Course number: **563**  
(463 or 563 ?)



## 7. Tasks, Grading Breakdown

### PART 1: BIMODAL PREDICTOR

(a) [ECE463: 25 points] or [ECE563: 20 points] Gradescope will evaluate your simulator on the four validation runs “val\_bimodal\_1.txt”, “val\_bimodal\_2.txt”, “val\_bimodal\_3.txt”, and “val\_bimodal\_4.txt”, posted on the website for the BIMODAL PREDICTOR. Gradescope will also evaluate your simulator on one bimodal predictor mystery run. Each validation run and mystery run is worth  $\frac{1}{5}$  of the points for this part (5 or 4 points each). Gradescope must say that you match all four validation runs to get credit for the experiments with the bimodal predictor, however.

(b) [ECE463: 25 points] or [ECE563: 20 points] Simulate BIMODAL PREDICTOR for different sizes ( $7 \leq m \leq 20$ ). Use the traces *gcc*, *jpeg*, and *perl*. [20 or 15 points] Graphs: Produce one graph for each benchmark. Graph title: “<benchmark>, bimodal”. Y-axis: branch misprediction rate. X-axis: *m*. Per graph, there should be only one curve consisting of 14 datapoints (connect the datapoints with a line).

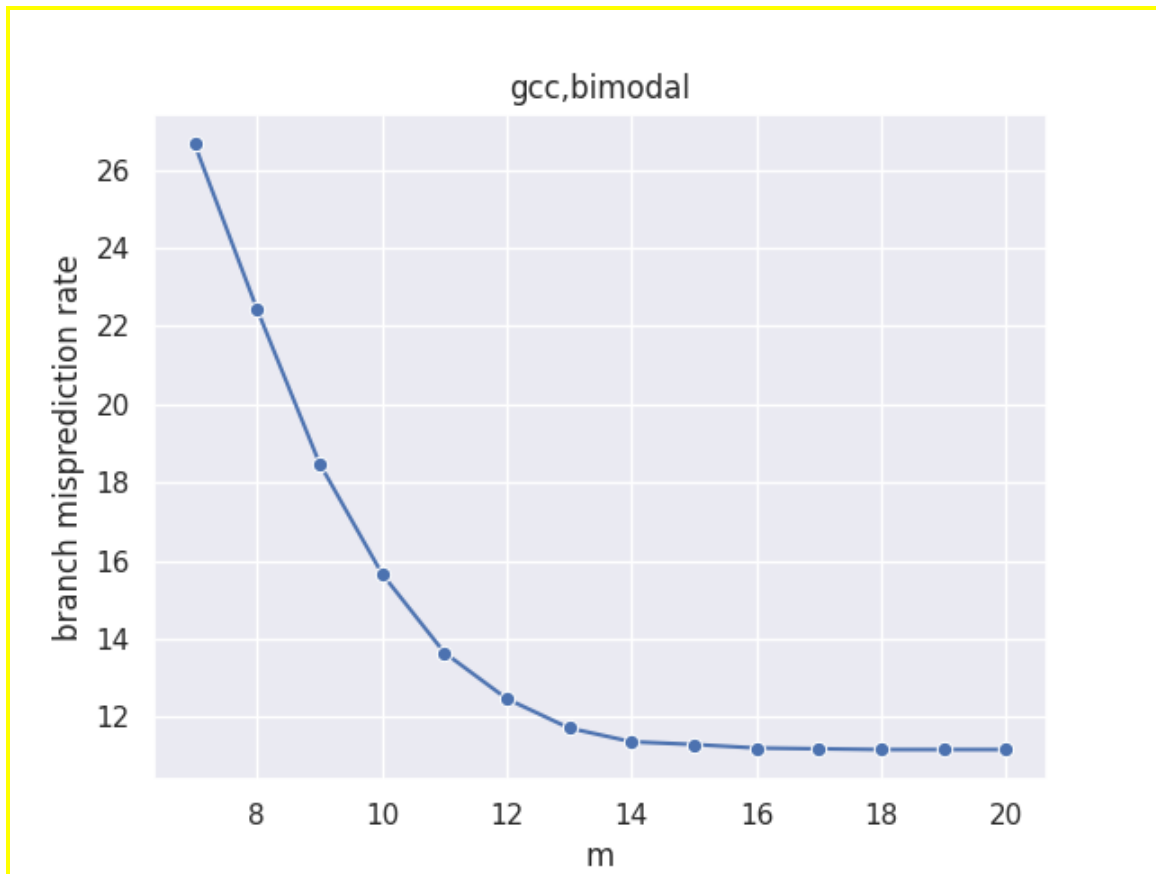

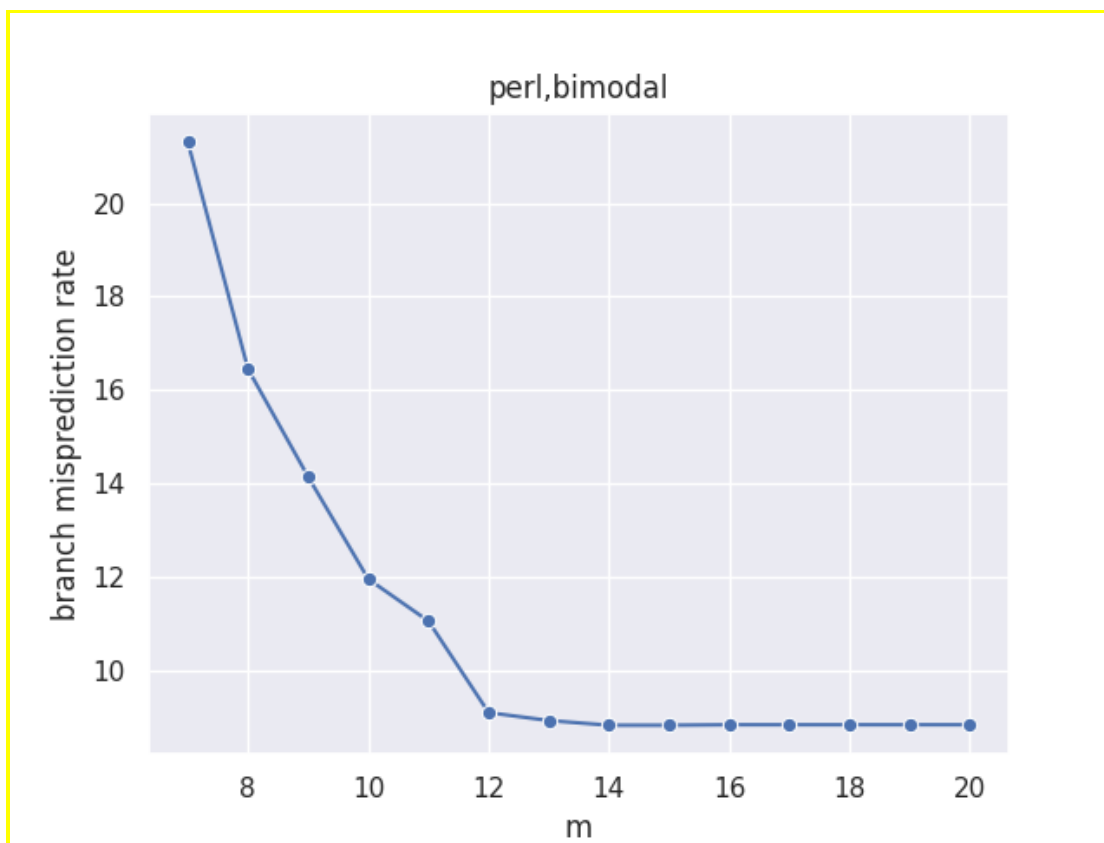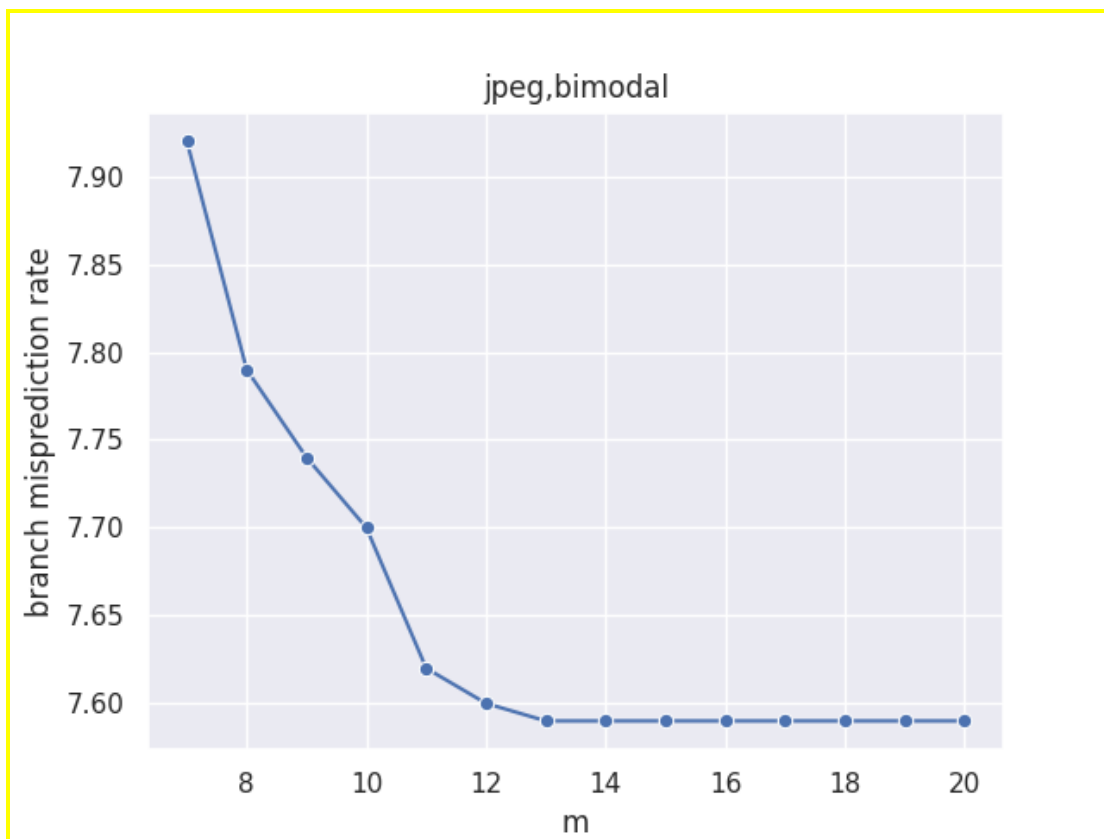

[5 points] Analysis:

1. [1 point] As the bimodal predictor's table size increases, the branch misprediction rate **decreases**.

2. [2 points] For each benchmark, indicate the minimum value of  $m$  at which the misprediction rate bottoms-out (reaches its minimum) and indicate its minimum misprediction rate. **Fill in the table below.**

Benchmark	Minimum " $m$ " at which misprediction rate reaches its minimum	Minimum misprediction rate
gcc	$m = 18$	11.1738 %
jpeg	$m = 15$	7.5852 %
perl	$m = 15$	8.8193 %

3. [1 point] At some point, increasing the bimodal predictor's table size is of no value. At this point, each static branch (*i.e.*, each static branch PC) is allocated a dedicated **2-bit counter** in the table. Given that interference among different static branches is eliminated at this point, the only way to improve accuracy further is **a better prediction algorithm**.

4. [1 point] I infer that **gcc** has **more** static branches (*i.e.*, unique static branch PCs) than **jpeg**, because **gcc** requires **more** table entries than **jpeg** before its misprediction rate bottoms-out.

## PART 2: GSHARE PREDICTOR

(a) [ECE463: 25 points] or [ECE563: 20 points] Gradescope will evaluate your simulator on the four validation runs "val\_gshare\_1.txt", "val\_gshare\_2.txt", "val\_gshare\_3.txt", and "val\_gshare\_4.txt", posted on the website for the GSHARE PREDICTOR. Gradescope will also evaluate your simulator on one gshare predictor mystery run. Each validation run and mystery run is worth  $\frac{1}{5}$  of the points for this part (5 or 4 points each). Gradescope must say that you match all four validation runs to get credit for the experiments with the gshare predictor, however.

(b) [ECE463: 25 points] or [ECE563: 20 points] Simulate GSHARE PREDICTOR for different sizes ( $7 \leq m \leq 20$ ), and for each size, *i.e.*, for each value of  $m$ , sweep the global history length  $n$  from 0 to  $m$ . Use only the trace **gcc**.


[20 or 15 points] **Graphs:** Produce one graph for **gcc**. Graph title: "gcc, gshare". Y-axis: branch misprediction rate. X-axis:  $n$  (spanning  $n=0$  to  $n=20$ ). For this graph, there should be a total of 203 datapoints plotted as 14 curves. Datapoints having the same value of  $m$  (same predictor size) are connected with a line, *i.e.*, one curve for each value of  $m$ . Note that not all curves have the same number of datapoints; see the listing below for the number of datapoints for each of the 14 curves,  $m=7$  through  $m=20$ . The rationale for this graph is to study the effect of global history length for each predictor size.

$m=7$  curve has 8 datapoints:  $0 \leq n \leq 7$

$m=8$  curve has 9 datapoints:  $0 \leq n \leq 8$

...

$m=20$  curve has 21 datapoints:  $0 \leq n \leq 20$

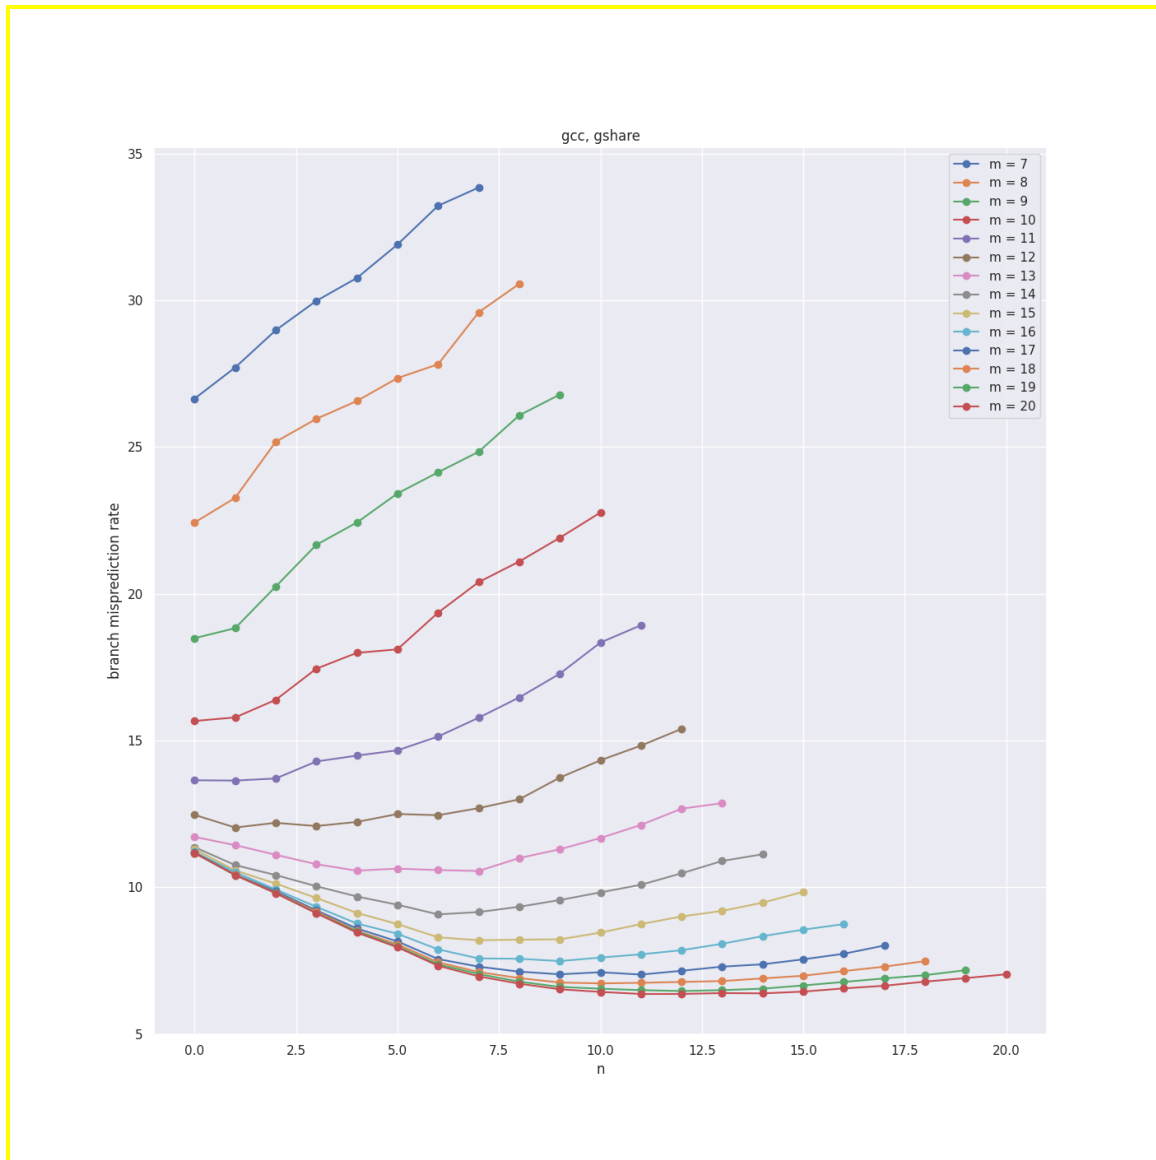

[5 points] Analysis:

**Insight:** With the bimodal predictor ( $n=0$ : no global history), a given static branch is predicted using only a single 2-bit counter. With the addition of global history, that single counter is *specialized* or *multiplied* into many more counters. All these counters are used by the same static branch for more specialized predictions among its dynamic instances, promising higher accuracy *as long as there are adequate counters available in the table* (not just for this static branch, but for all static branches). Thus, with the addition of global history, there is a need for more 2-bit counters ... the key idea being that, at some point, bimodal cannot even take advantage of more counters (see your analysis section for bimodal, above) whereas gshare *can*. Summarizing: *Gshare needs an abundance of counters and, unlike bimodal, it can exploit abundant counters for higher accuracy.*

1. [0.5 points] At small table sizes, global history can **hurt** accuracy. This is because there are **too few** counters.

2. [0.5 points] At large table sizes, global history can **help** accuracy. This is because there are **abundant** counters.

3. [2.5 points] For each table size ( $m$ ), indicate the global history length ( $n$ ) that yields the lowest misprediction rate, indicate what that lowest misprediction rate is, and indicate the misprediction rate for bimodal. **Fill in the table below.**

$m$	Global history length ( $n$ ) that yields the lowest misprediction rate	Lowest misprediction rate	Bimodal misprediction rate ( <i>i.e.</i> , for $n=0$ )
7	0	26.6485 %	26.6485 %
8	0	22.4286 %	22.4286 %
9	0	18.4933 %	18.4933 %
10	0	15.6714 %	15.6714 %
11	1	13.6445 %	13.6502 %
12	1	12.0383 %	12.4672 %
13	7	10.5609 %	11.7193 %
14	6	9.0789 %	11.3708 %
15	7	8.20295 %	11.2960 %
16	9	7.4907 %	11.2061 %
17	11	7.03095 %	11.1865 %
18	10	6.7347 %	11.1738 %
19	12	6.4736 %	11.1745 %
20	12	6.3688 %	11.1745 %

4. [0.5 points] The *smallest* bimodal predictor that achieves the best bimodal accuracy (lowest misprediction rate among all bimodal configurations) is as follows:

Best bimodal:  $m = 18$ , misp. rate = **11.1738 %**

5. [0.5 points] The *smallest* gshare predictor that achieves the best gshare accuracy (lowest misprediction rate among all gshare configurations) is as follows:

Best gshare:  $m = 20$ ,  $n = 12$ , misp. rate = **6.3688 %**

6. [0.5 points] In conclusion, with adequate predictor storage budget, gshare totally **rocks!**

### PART 3: HYBRID PREDICTOR (ECE563 students only)

**[ECE563: 20 points]** Gradescope will evaluate your simulator on the two validation runs “val\_hybrid\_1.txt” and “val\_hybrid\_2.txt” posted on the website for the HYBRID PREDICTOR. Gradescope will also evaluate your simulator on two hybrid predictor mystery runs. Each validation run and mystery run is worth  $\frac{1}{4}$  of the points for this part (5 points each).