

## Some Question and Answer

=====

1. Which one is Boolean attribute? Answer:: read-only.
2. Which one is void element? Answer:: <area>
3. Which is the entity number of html. Answer:: &#38
4. Which the highest integer number. Answer:: 2<sup>53</sup>
5. In JavaScript, the 64 number is divided into----? Answer:: Three components
6. Which one is not number type special value in JavaScript? Answer:: User defined
7. JavaScript precedence--. Answer:: The multiplication sign(\*) and division sign(/) have the same precedence
8. Which operator perform an implied division and return the reminder? Answer:: modulo(%)
9. Which one the unary operator? Answer:: +23
10. How many logical operators in JavaScript? Answer:: three
11. Which is not operator in JavaScript? Answer:: !
12. Which the valid variable name? Answer:: gift4you
13. 

```
var age = "20";  
alert( age + 1);
```


  
Which one is the display alert? Answer:: 201
13. 


```
var age = "20";  
alert( Number(age) + 1);
```

  
Which one is the display alert? Answer:: 21
14. Which function do you use to query the user input by display a modal message? Answer:: prompt
15. Which function do you use to query whether he agree to taken certain action to display a modal message? Answer:: confirm
16. Which one is the null coalescing operator? Answer:: ||
17. Which attribute is used to <link> element to specify target device? Answer:: media
18. 

```
var pizzaMeatParts = ['pepperoni', 'ham', 'bacon'];  
var meatParts = pizzaMeatParts.join();
```


  
what is the output? Answer:: pepperoni, ham, bacon
19. Which one is the correct for import a CSS file to the current style sheet? Answer:: @import
20. How do you define custom font that will be downloaded to user machine if it is not available? Answer:: @font-face rule
21. Which one the selector of hyperlinks that are direct child of list item? Answer:: li>a
22. Which one locates the <p> element is preceded by a <h1> element as the previous sibling p? Answer:: h1 + p
23. Which one locates all hyperlinks whose href attribute value start with http? Answer:: a[href^ = 'http']{}
24. Which one is an ARIA attribute, used in elements, define by WAI? Answer:: role
25. What is privileged method? Answer: A method that is public but has access to private data.
26. Which one the correctly activates jQuery Intelligence? Answer:: `///<reference path="jquery-3.1.1.js"/>`
27. Which syntax jQuery used to locate document object model? Answer:: \$(selector)
28. Which method of jQuery is used to get or set value of DOM element that has a value property? Answer:: val()
29. Which category of status code indicate server error? Answer:: 5XX
30. The Manifest file of node.js is---. Answer:: package.json.
31. What commend is used to create package.json file? Answer:: npm init
32. Which method chains asynchronous operation? Answer:: pipe()
33. ----- method is create a promise object. Answer:: \$.when()
34. Which library is used for create a node.js website? Answer:: socket.io
35. Which attribute is used to preventing malware and annoyances such as pop-ups from being introduced when the content is embedded on your HTML page. Answer:: sandbox
36. Which method to remove an event listener? Answer:: off
- 37.
- 38.

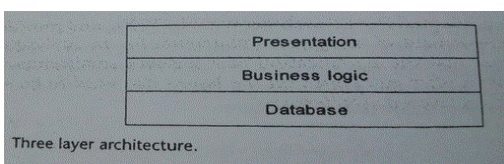

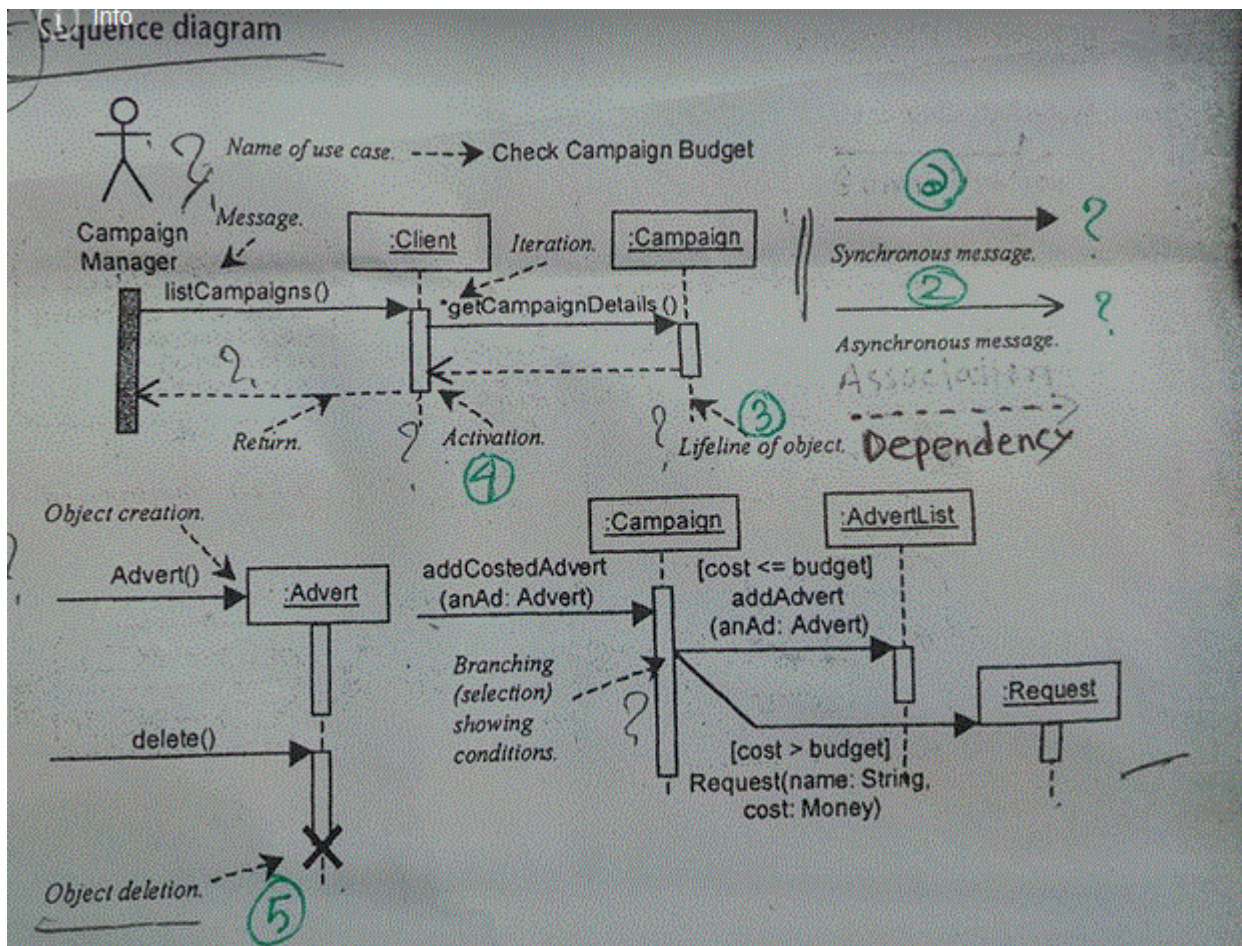

39. Symbol of synchronous message. Answer:: 1  
 40. Symbol of Asynchronous message. Answer :: 2  
 41. Symbol of Activation. Answer:: 4  
 42. Symbol of lifeline of object. Answer:: 3  
 43. Symbol of object deletion. Answer:: 5

### Statechart diagram

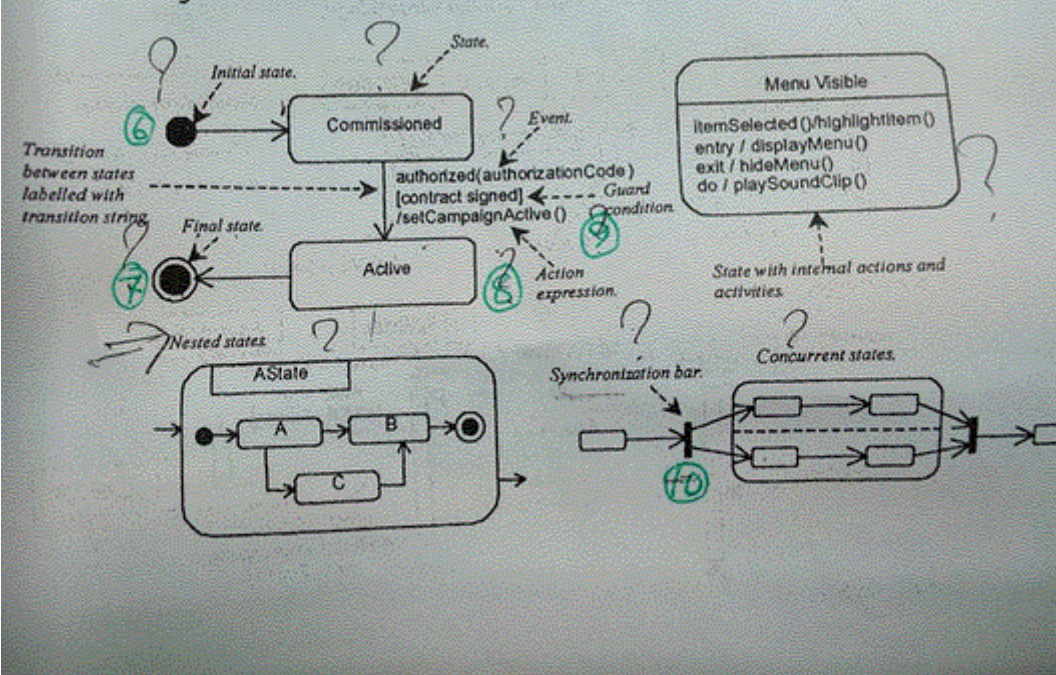

44. Symbol of initial state. Answer:: 6  
 45. Symbol of final state. Answer :: 7  
 46. Which one is action expression? Answer:: 8  
 47. Which one is guard condition? Answer:: 9  
 48. Symbol of synchronization bar. Answer:: 10