


429. N-ary Tree Level Order Traversal

Given an n-ary tree, return the level order traversal of its nodes' values.


Nary-Tree input serialization is represented in their level order traversal, each group of children is separated by the null value (See examples).

Example 1:

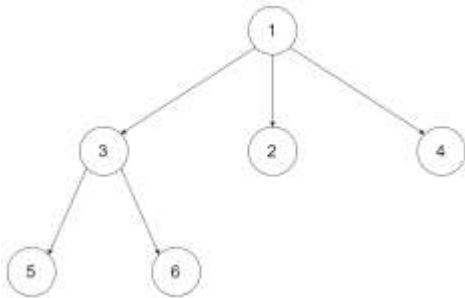

- **Input:** root = [1,null,3,2,4,null,5,6]
- **Output:** [[1],[3,2,4],[5,6]]

Example 2:

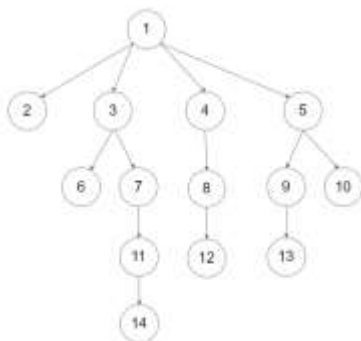

- **Input:** root = [1,null,2,3,4,5,null,null,6,7,null,8,null,9,10,null,null,11,null,12,null,13,null,null,14]
- **Output:** [[1],[2,3,4,5],[6,7,8,9,10],[11,12,13],[14]]

Constraints:

- The height of the n-ary tree is less than or equal to 1000
- The total number of nodes is between [0, 10⁴]