

GAD173

Vishnu Raveendran

5000517

Technical Design Documentation

Second Build

Contents:

1.1 Overview

1.1.1 Purpose

1.1.2 Scope

1.1.3 Deliverables

1.1.4 Tools, target platform and system requirements

1.2 Program

1.2.1 User Interface

1.2.2 Functions and program layout

1.2.3 Loading from files

1.2.4 UML Class diagram

1.2.5 UML Case diagram

1.2.6 Timeline

1.3 Future features

Purpose:

To make a breakout clone and make a map editor for the game.

Scope:

The map editor will allow the user to create their own breakout level. It will allow them to drag tiles into place or select tiles and save the level into a file.

Maps will be saved into a text file which can be loaded from the game.

The game will be a clone of the game "Breakout".

Deliverables:

These are the deliverables for the first build of the editor and the game:

- 20x12 grid
- User must be able to place bricks wherever they see fit
- User must be able to save the map to a file
- User friendly UI
- The game must load map from the text file
- Game must have core mechanics done

Tools:

- Visual Studio (Using C++, SFML libraries and kage2d engine)
- Source tree
- GitHub
- Target platform: Windows



Requirements:

- OS: Windows 7 and above
- Processor: 2 GHZ
- RAM: 4 GB
- Graphics: 256MB
- DirectX: Version 10
- Storage: 50MB of free space

UI:

There is a dropdown menu with a save option, load option, add tile, remove tile, reset option and exit option.

Blocks will be draggable onto a 20x12 grid or there will be a 20x12 grid with selectable squares (where marked squares represent blocks and unmarked will be left blank).

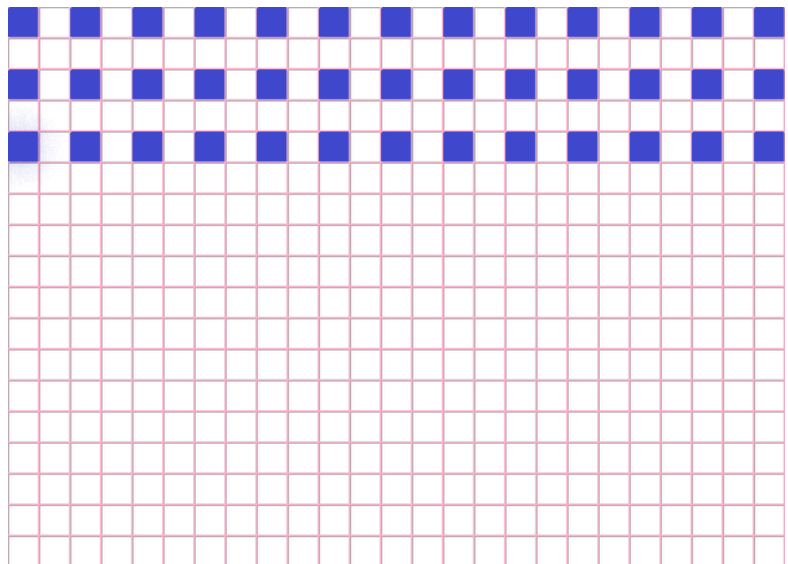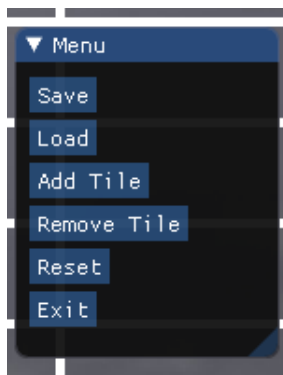

Functions:

The game will focus on the main function and the update function. Where update will handle things such as collision of the ball and the brick and the deletion of blocks and score while main will initialize all starting sprites and values and the main menu.

The main menu will also have the map editor tool in it thus handling all functions related to the map editor.

Some functions are Save(), Load(), Reset() and so on.


Loading from files:

Maps will be loaded from a text file. It will be read in array form.

```
1  [Map]
2  0, 1, 0, 1, 0, 1, 0, 1, 0, 1
3  1, 0, 1, 0, 1, 0, 1, 0, 1, 0
4  0, 1, 0, 1, 0, 1, 0, 1, 0, 1
5  1, 0, 1, 0, 1, 0, 1, 0, 1, 0
6  0, 1, 0, 1, 0, 1, 0, 1, 0, 1
7  1, 0, 1, 0, 1, 0, 1, 0, 1, 0
8  0, 1, 0, 1, 0, 1, 0, 1, 0, 1
9  1, 0, 1, 0, 1, 0, 1, 0, 1, 0
10
```



UML Class:

UML Class diagram for the editor

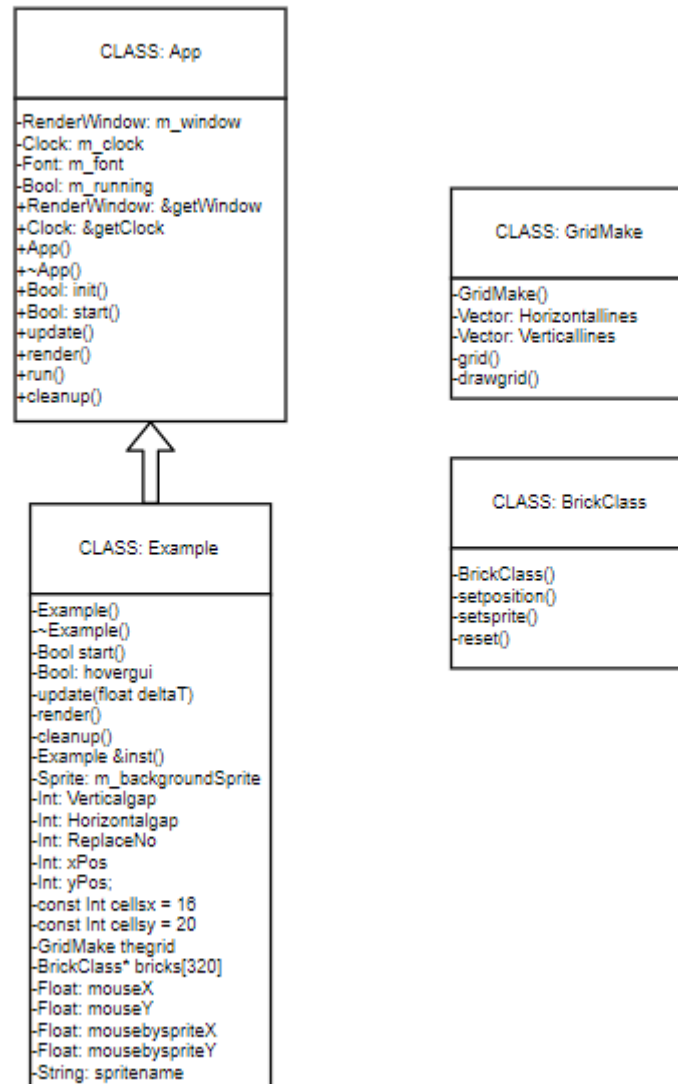

UML for the game will be added in a later build

UML Case:

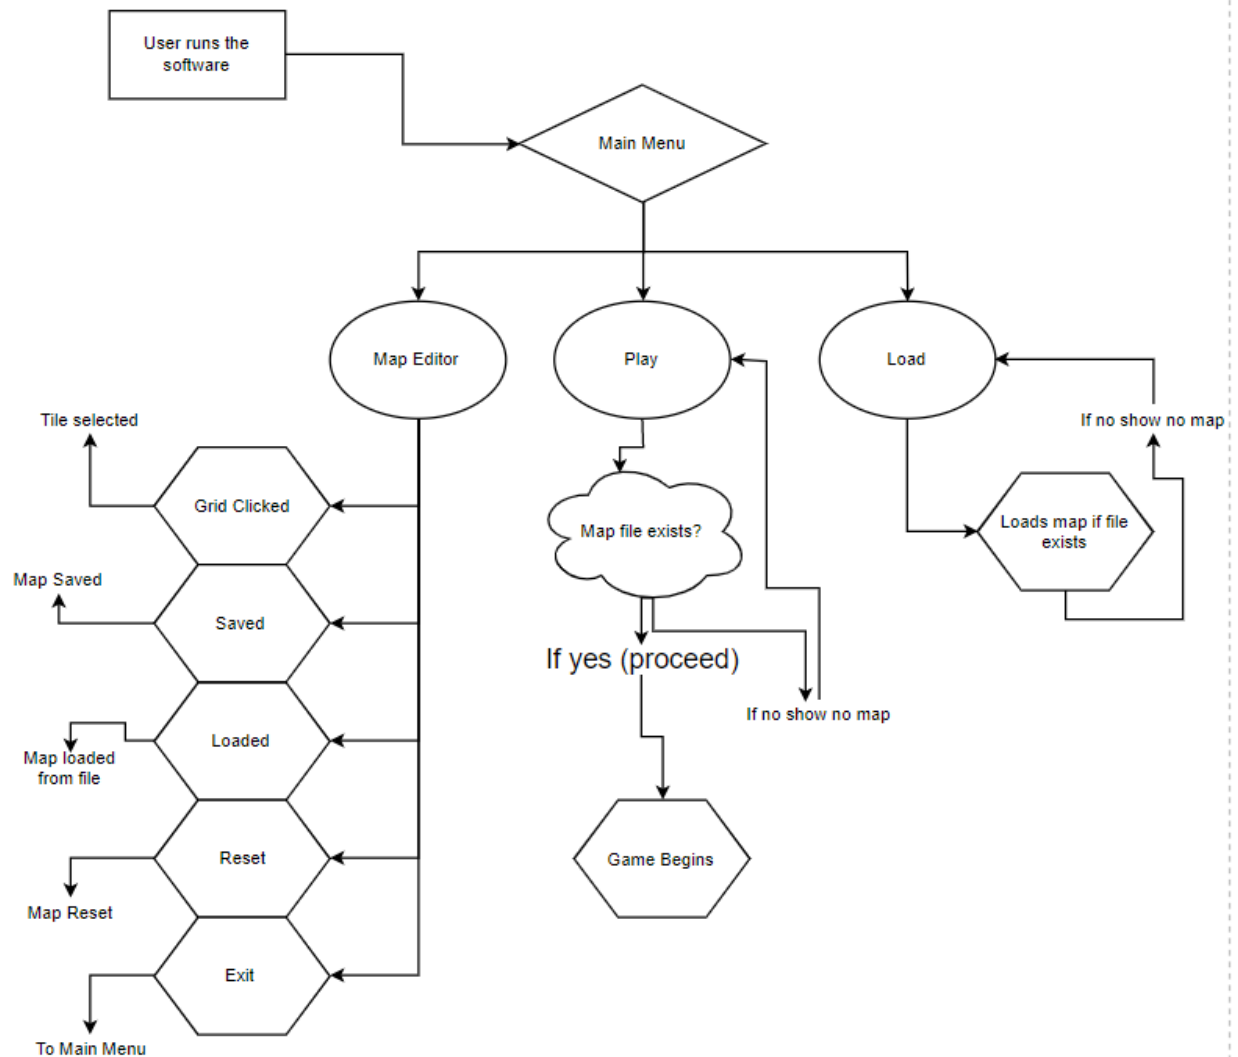

Timeline:

Week 1	Week 2	Week 3	Week 4	Week 5	Week 6	Week 7	Week 8	Week 9	Week 10	Week 11	Week 12	Week 13
SFML and C++ Basics												
	TDD											
			Map Editor									
				AABB								
			GUI									
						Text file						
							Game mechanics (movement, breaking,etc)					
									Making the map			
										Bug fixes and testing		
										Extra stuff and more testing if possible		

Future Features (if possible):

- Multiple files