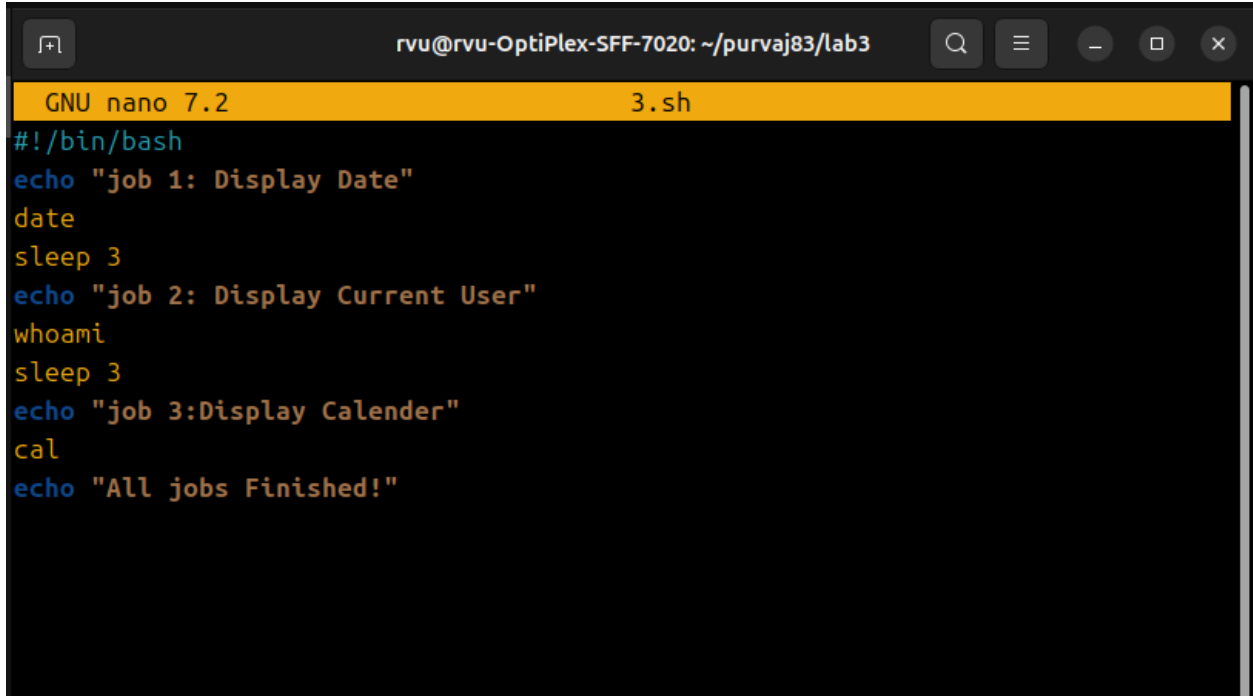


Lab-4

Scheduling

Code:

A screenshot of a terminal window with a dark background. The window title bar shows the user 'rvu' on a machine named 'rvu-OptiPlex-SFF-7020' in the directory '~/purvaj83/lab3'. The terminal is running the 'nano' text editor, editing a file named '3.sh'. The script content is as follows:

```
#!/bin/bash
echo "job 1: Display Date"
date
sleep 3
echo "job 2: Display Current User"
whoami
sleep 3
echo "job 3: Display Calender"
cal
echo "All jobs Finished!"
```

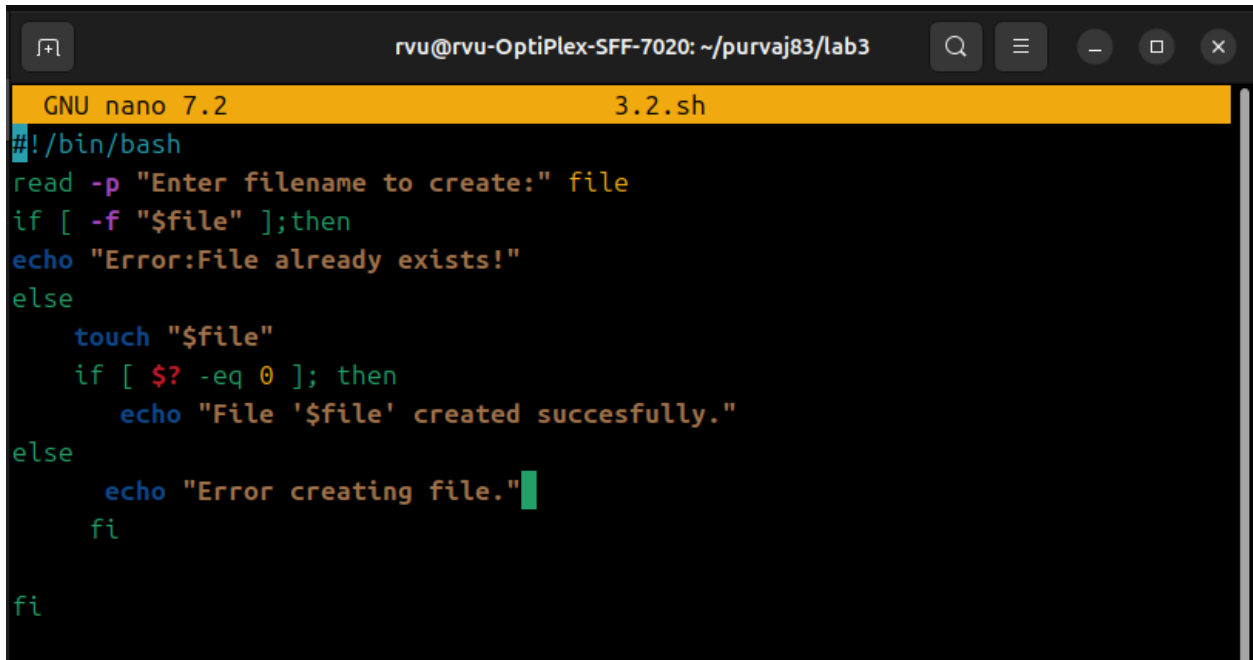
Output:

```
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ nano 3.sh
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ ./3.sh
job 1: Display Date
Tue Feb 24 02:14:26 PM IST 2026
job 2: Display Current User
rvu
job 3:Display Calender
    February 2026
Su Mo Tu We Th Fr Sa
 1  2  3  4  5  6  7
 8  9 10 11 12 13 14
15 16 17 18 19 20 21
22 23 24 25 26 27 28

All jobs Finished!
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$
```

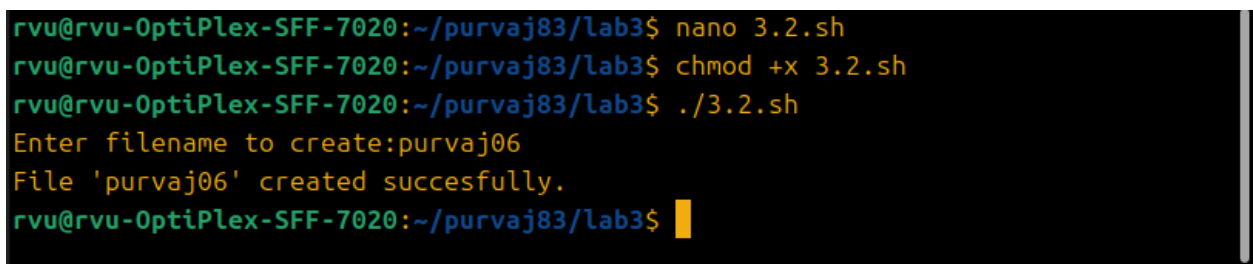
File Operations

Code:

A screenshot of a terminal window with a nano editor. The title bar shows the user 'rvu' on a machine named 'rvu-OptiPlex-SFF-7020' in the directory '~/purvaj83/lab3'. The editor is editing a file named '3.2.sh'. The code inside the file is a shell script that prompts the user for a filename, checks if it exists, and either creates it or reports an error.

```
GNU nano 7.2 3.2.sh
#!/bin/bash
read -p "Enter filename to create:" file
if [ -f "$file" ];then
echo "Error:File already exists!"
else
    touch "$file"
    if [ $? -eq 0 ]; then
        echo "File '$file' created succesfully."
    else
        echo "Error creating file."
    fi
fi
```

Output:

A screenshot of a terminal window showing the execution of the script. The user runs 'nano 3.2.sh', then 'chmod +x 3.2.sh', and finally './3.2.sh'. The script prompts for a filename, the user enters 'purvaj06', and the script outputs 'File 'purvaj06' created succesfully.'.

```
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ nano 3.2.sh
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ chmod +x 3.2.sh
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ ./3.2.sh
Enter filename to create:purvaj06
File 'purvaj06' created succesfully.
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$
```

Copy file

Code:

```
GNU nano 7.2                                3.3.sh *
! /bin/bash
read -p "Enter filename to copy: " source
read -p "Enter new file (destination): " dest

if [ -f "$source" ]; then
    if cp "$source" "$dest"; then
        echo "File copied successfully."
    else
        echo "Error copying file."
    fi
else
    echo "Source file does not exist."
fi
```

Output:

```
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ ./3.3.sh
Enter filename to copy: pur
Enter new file (destination): vaj
Source file does not exist.
```

Moving file:

Code:

```
GNU nano 7.2                                3.4.sh
#!/bin/bash
read -p "Enter filename to movefile: " movefile
read -p "Enter new name/location: " newloc

if [ -f "$movefile" ]; then
    if cp "$movefile" "$newloc"; then
        echo "File moved successfully."
    else
        echo "Error moving file."
    fi
else
    echo "Source file does not exist."
fi
```

Output:

```
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ chmod +x 3.4.sh
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ ./3.4.sh
Enter filename to movefile: pur
Enter new name/location: lab2
Source file does not exist.
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$
```

Deleting a file

Code:

```
GNU nano 7.2                                3.5.sh
read -p "enter filename to delete" delfile
if [ -f "$delfile" ]; then
    rm "$delfile"
    if [ $? -eq 0 ]; then
        echo "file deleted successfully"
    else
        echo "error deleting file"
    fi
else
    echo "error: file does not exist"
fi
```

Output:

```
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ touch pur.sh
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$ ./3.5.sh
enter filename to deletepur.sh
file deleted successfully
rvu@rvu-OptiPlex-SFF-7020:~/purvaj83/lab3$
```