Use case 13: Create new query from attribute of current result

```
:User                          :System

  |                               |
  |   requestContext(attribute)   |
  |------------------------------>|
  |                               |
  |            context            |
  |<------------------------------|
  |                               |
  |   getQueryFromAttr(attribute) |
  |------------------------------>|
  |                               |
  |     enterIntoSearch(string)   |
  |<------------------------------|
  |                               |
  |          doQuery(query)       |
  |------------------------------>|
  |                               |
  |       showResults(results)    |
  |<------------------------------|
  |                               |
```
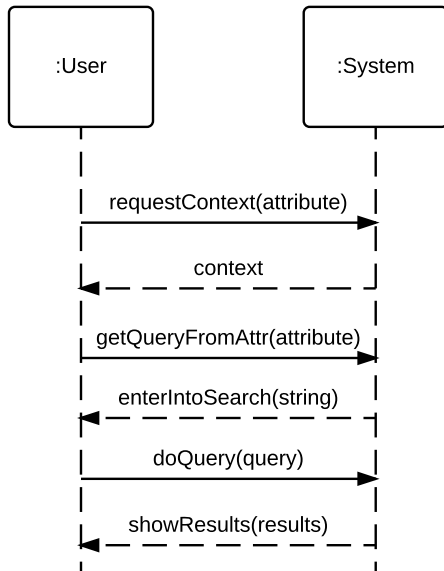
Use case 14: Export results to file

```
:User                          :System

  |          beginExport()        |
  |------------------------------>|
  |                               |
  |       showSaveDialog()        |
  |<------------------------------|
  |                               |
 Opt     cancelExport()           |
         finish                   |
 [Cancel]  |------------------------------>|
  |                               |
  |         createFile(path)      |
  |------------------------------>|
  |                               |
 loop      invalidPath(reason)    |
           |<----------------------|
 [Invalid   createFile(path)      |
 file path] |--------------------->|
  |                               |
  |          saveFile(data)       |
  |<------------------------------|
  |                               |
```
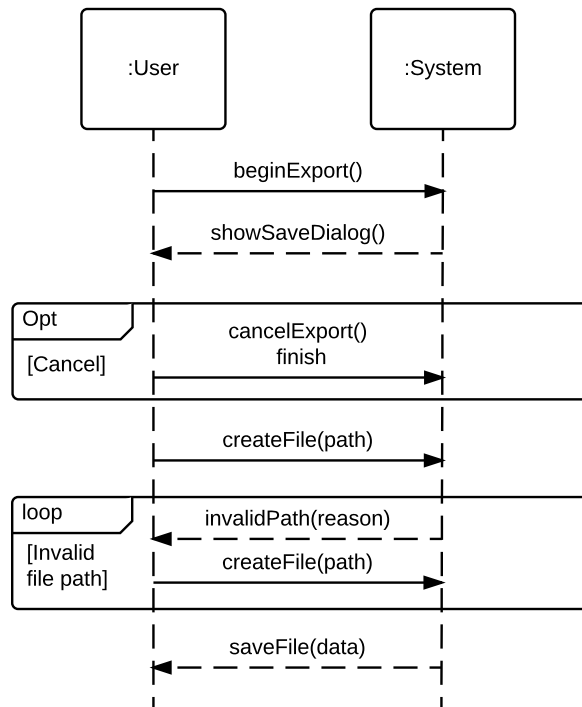
Use case 15: Import results from file

```
:User                          :System

  |          beginImport()        |
  |------------------------------>|
  |                               |
  |        showOpenDialog()       |
  |<------------------------------|
  |                               |
 Opt      cancelImport()          |
          finish                  |
 [Cancel]  |------------------------------>|
  |                               |
  |          importFile(file)     |
  |------------------------------>|
  |                               |
 Opt       dataInvalid(reason)    |
           finish                 |
 [Invalid  |<----------------------|
 data in file]                    |
  |                               |
  |       showResults(results)    |
  |<------------------------------|
  |                               |
```
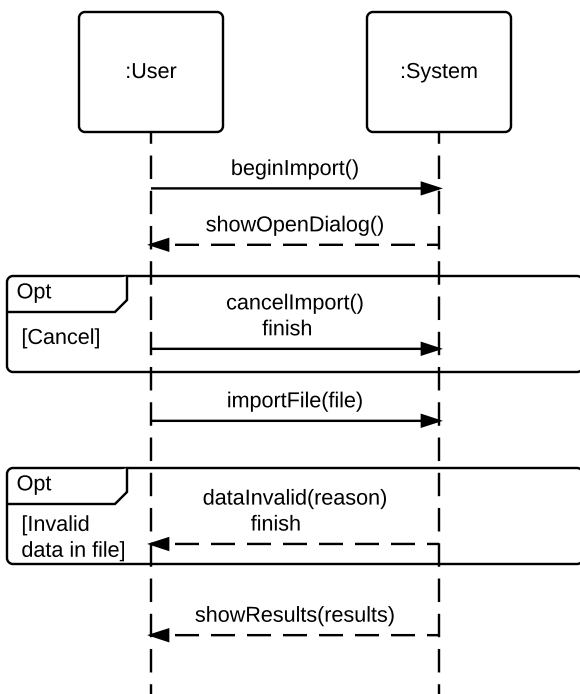
Use case 16: Re-search query from imported file

```
:User                          :System

  |      getQueryFromResults()    |
  |------------------------------>|
  |                               |
  |          queryString          |
  |<------------------------------|
  |                               |
  |          doQuery(query)       |
  |------------------------------>|
  |                               |
  |       showResults(results)    |
  |<------------------------------|
  |                               |
```